

DARK®

DARK[®]

What are
you looking
for ?



AGUJA
page 16



BANGSTER
page 74




BANGSTER DISK
page 80



BANGSTER HOODY
page 86



CIGAR
page 108



DING
page 170



GASTON
page 188



IJ-LAMP
page 306




KAVEOO
page 212



L-HOP 1
page 230



L-HOP 2
page 230



ORGUE
page 308



RBA
page 318



ROND-L
page 320



SIBI
page 342



TALORE
page 380




TUKI 60
page 408



12-25
page 422



TWERKIT 2 JR
page 440



TWERKIT 3
page 440



WALLSTER
page 458



WALLSTER JR.
page 466

Wall



APOLLO
page 30



AUSUM
page 50



BABY BUBBLE
page 56



BALLZZZ ONE
page 60



BALLZZZ TWO
page 60



BALLZZZ FDR
page 60




CIGAR
page 109



COOLCAT
page 118



COOLFIN
page 124



COOLFIN JR
page 136



CUP CAKE
page 140




DANDY
page 148



D2V2
page 164



IJ-LAMP
page 206



LA CAGE
page 224




LGTM
page 234




NINZA
page 282




NO COPY
page 290



NO FRUIT
page 294



OBLIVION
page 302



SPACEWALKER
page 350



SPACEWALKER JR
page 354




SPINE
page 376




TRAPPED
page 394



TUKI 40
page 398



TUKI 60
page 408



12-25
page 422



BANGSTER
page 74



BANGSTER DISK
page 80



BANGSTER HOODY
page 86



BOKY
page 96



CAPITANO
page 100



CAPTAIN CORK
page 102



EDGAR
page 180



FOREVER 27 DISK
page 184



GAZTA
page 192



HIHOPE TIKI
page 196



HIHOPE TUKI
page 196



ORGUE
page 308



PETROL
page 314



ROND-L
page 320



SANGHA
page 330



SATURNUZ
page 338



SOYUZ
page 344



TWOCAN
page 444



UPFO
page 454

Suspension



ANGLE BEAM
page 20



d-CONCRETE
page 154




d-COW
page 154



KITN
page 216



KITN
page 216

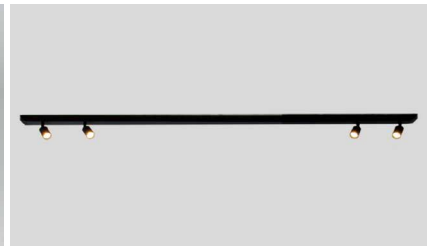


KITN
page 216



MR. BEAM
page 274



NINZA
page 282

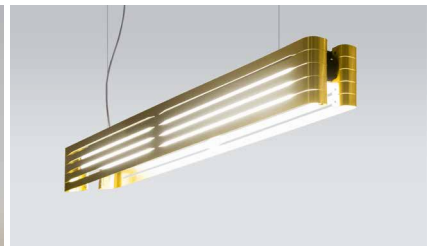

ORGUE
page 308



d-LEATHER
page 154



d-RABBIT
page 154



METROLINE
page 256



METROLINE BOX
page 262



METROFFICE
page 268



SPAZE
page 358



SPAZE
page 358



SPINE
page 376

Suspension

Ceiling



ANGLE BEAM
page 20



APETITO
page 40



IP44

ATSJI
page 42



IP44

ATSJI BOX 1
page 42



IP44

ATSJOEM
page 46




COOLFIN
page 124



COOLFIN MOVE
page 124



COOLFIN JR
page 136



COOLFIN JR SET 1
page 136




CUP CAKE SUZY
page 140



CUP CAKE JENNY
page 140



MAGNIFIQUE COUCOU
page 238




MAGNIFIQUE DEEP
page 238



MAGNIFIQUE MOVE
page 238



MAGNIFIQUE KIKI
page 238



MAGNIFIQUE BULB
page 238



METROBOX
page 252



TIKI
page 386



TIKI BOX 1
page 386



TIKI FIX
page 386



TIKI 40
page 398



TIKI 40 SET 1/90
page 398



TIKI 40 BOX 2
page 398



AUSUM
page 50



CIGAR
page 108



COOLCAT
page 118



COOLCAT move
page 118



COOLCAT SET 2
page 118



CUP CAKE KATHY
page 140



CUP CAKE LUCY
page 140



DROPZ
page 176



EDGAR ROUND
page 180



EDGAR SQUARE
page 180



FOREVER 27
page 184



NINZA C
page 282



NINZA
page 282

IP65
IP67



ROND-L
page 320



TALORE
page 380



TAQI SET 1
page 384

IP65



TAQI BOX 1
page 384


IP65



TUKI 40 FIX
page 398



TUKI 60 move
page 408



12-25
page 422



ZNOW
page 472



ZQUARE
page 478



ZQUARE
page 478

Track



COOLFIN TRACK
page 124



TUKI 40 TRACK
page 398



TUKI 60 TRACK
page 408



TUKI 75 TRACK
page 418



12-25 TRACK
page 422

Floor



HOEK
page 202



ROND-L
page 320



SPACEWALKER
page 350



CHILL-O
page 116



SPACEBOT
page 348



SPACEWALKER JR
page 354


Table

AGUJA


design ricardo bofill taller de arquitectura for dark






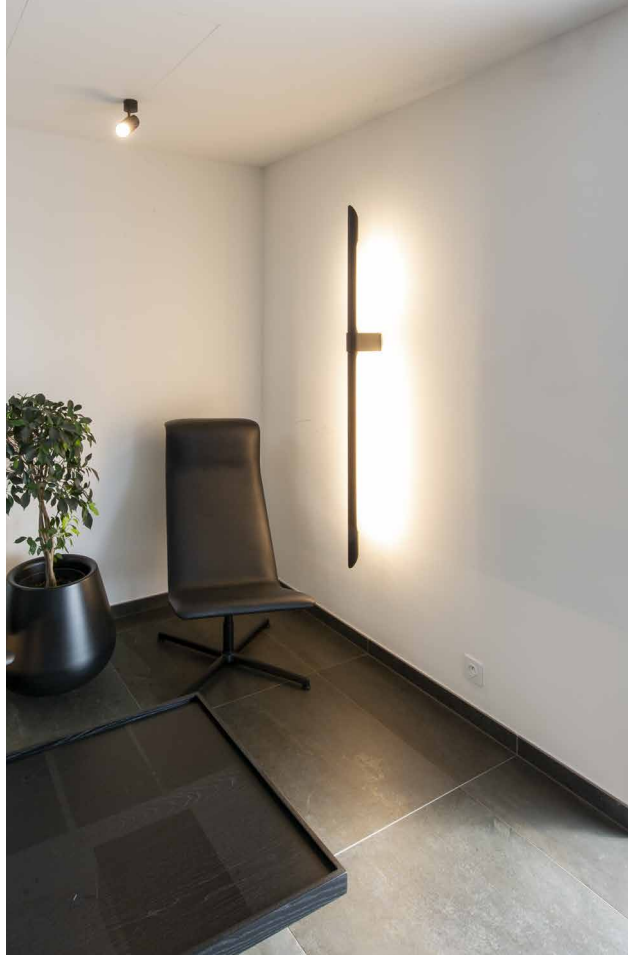

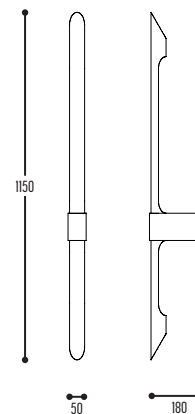


AGUJA 115
1279-BB(B)-3-K

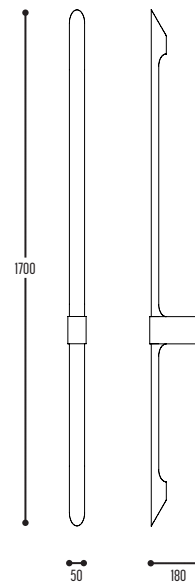

AGUJA 170
1275-BB(B)-3-K




BB(B)	COLORS	02		Black
		03		White
		111		Brass Finish
E	CRI • LUMENOUTPUT	3	AGUJA 115	>90CRI • 3150 Lm / 19,4W / 3000K
			AGUJA 170	>90CRI • 5250 Lm / 32,6W / 3000K
K	DRIVER	1	No driver	
		0	Non dimmable (intern)	
		2	Dimmable 1-10 V (extern)	
		3	Dali (extern)	




ANGLE BEAM

design anthony boelaert for dark



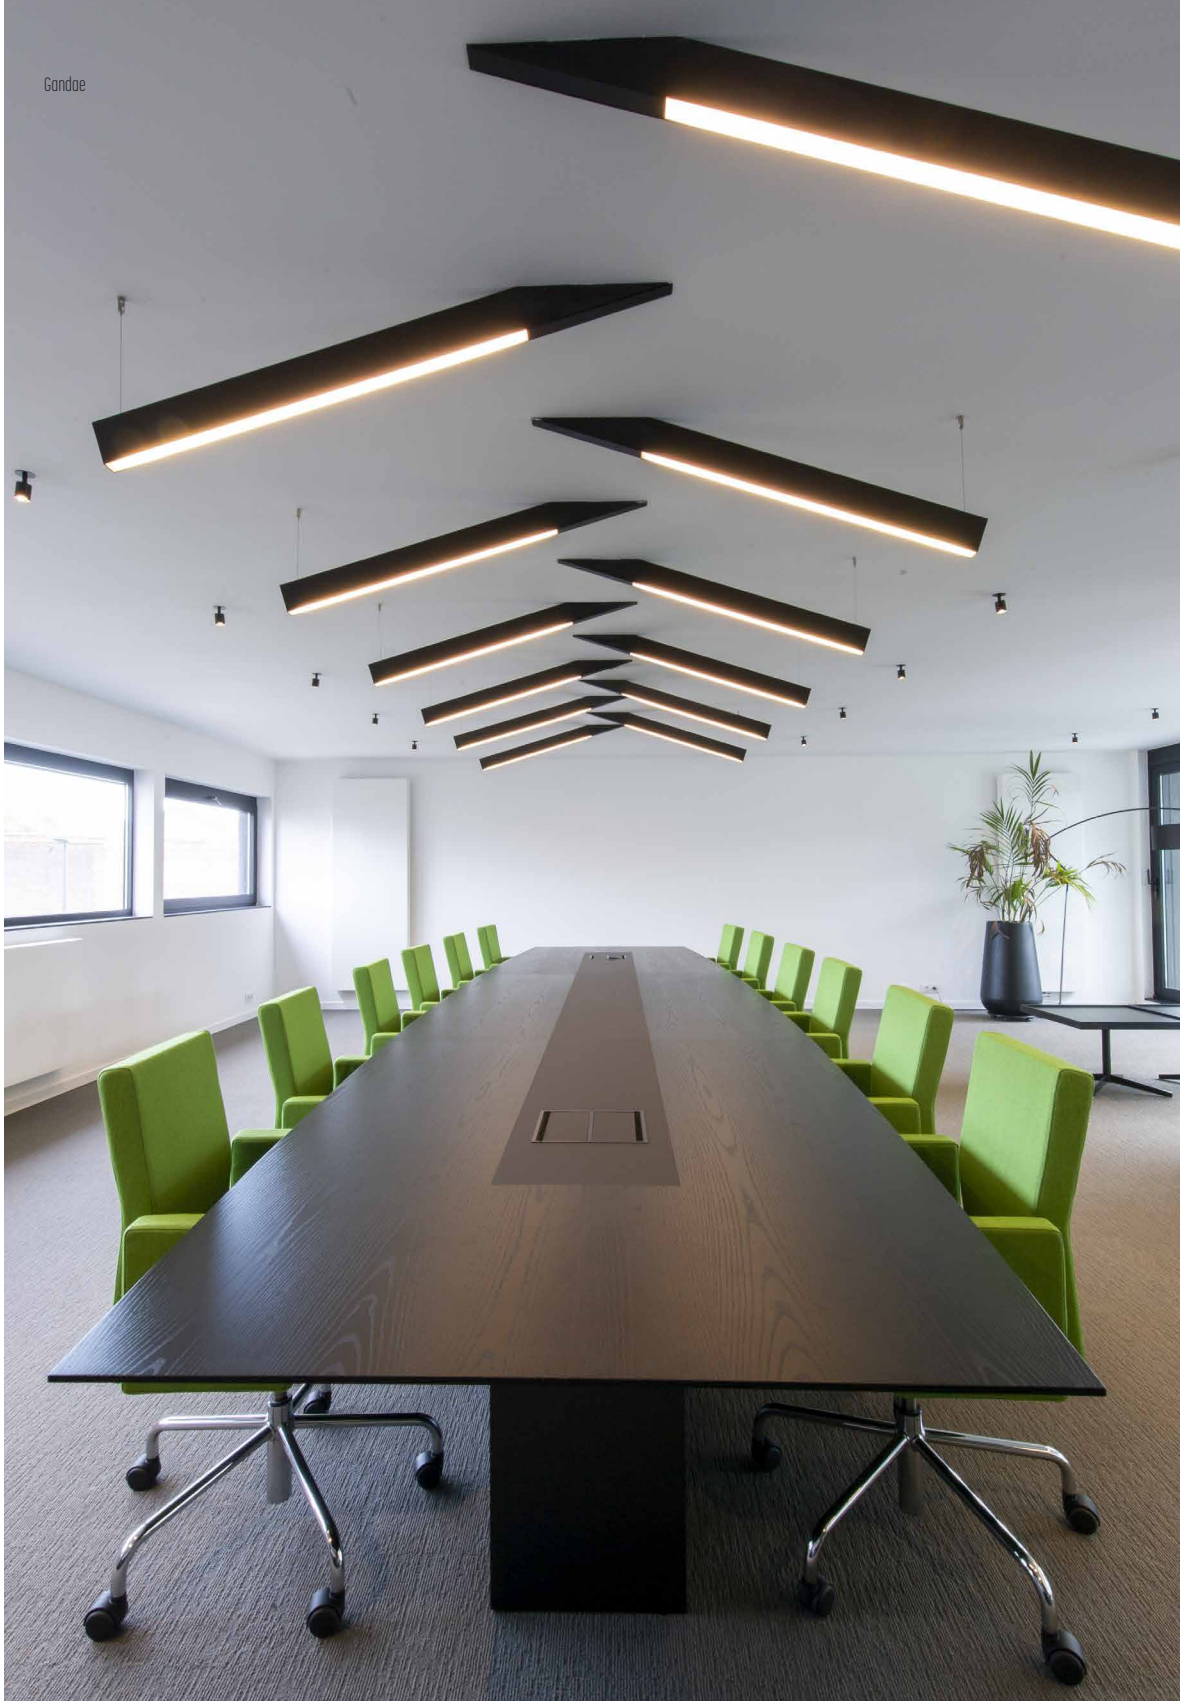



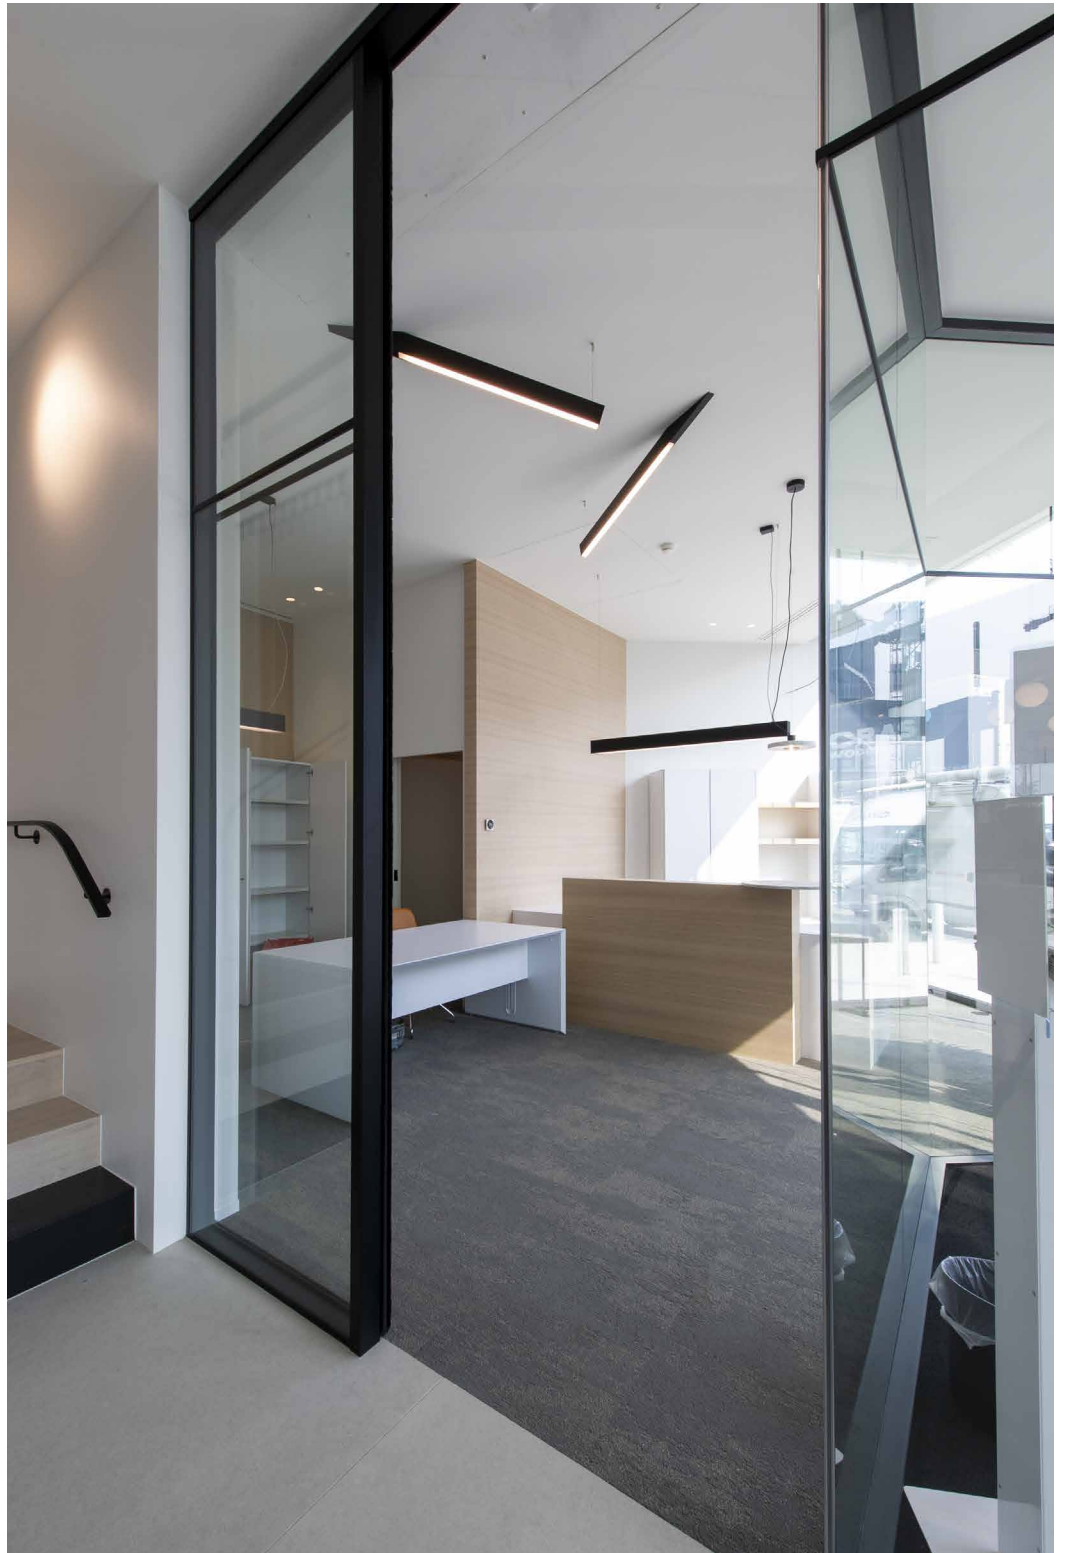











ANGLE BEAM 1
1230-BB(B)-824003-0-K

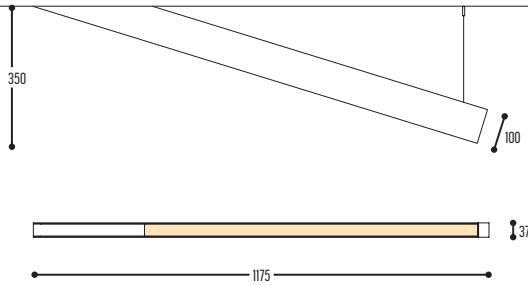

ANGLE BEAM 2
1231-BB(B)-832003-0-K

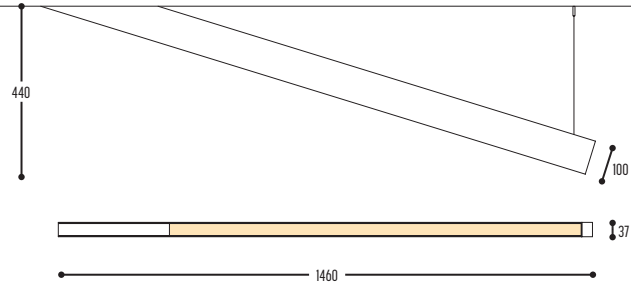

BB(B)	COLORS	02	Black		
		03	White		
		101	Soft Pink		
		103	Soft Blue		
		104	Soft Green		
		124	Kaki		
		140	Old Pink		
		141	Terracotta Red		
		142	Oxide Red		
		111	Brass Finish		
		112	Gold Finish		
		137	Bronze Finish		
					RAL color on request

EFF	LED	ANGLE BEAM 1	824	2400 Lm / 27 W
		ANGLE BEAM 2	832	3200 Lm / 36 W
GG	REFLECTOR	00	N.A.	
H	COLOR TEMP.	3	3000K	
J	DOWN TYPE	0	opal cover	
K	DRIVER	0	Non dimmable	
		2	Dimmable 1-10 V (intern)	
		3	DALI (intern)	



APOLLO

design romy kühne for dark















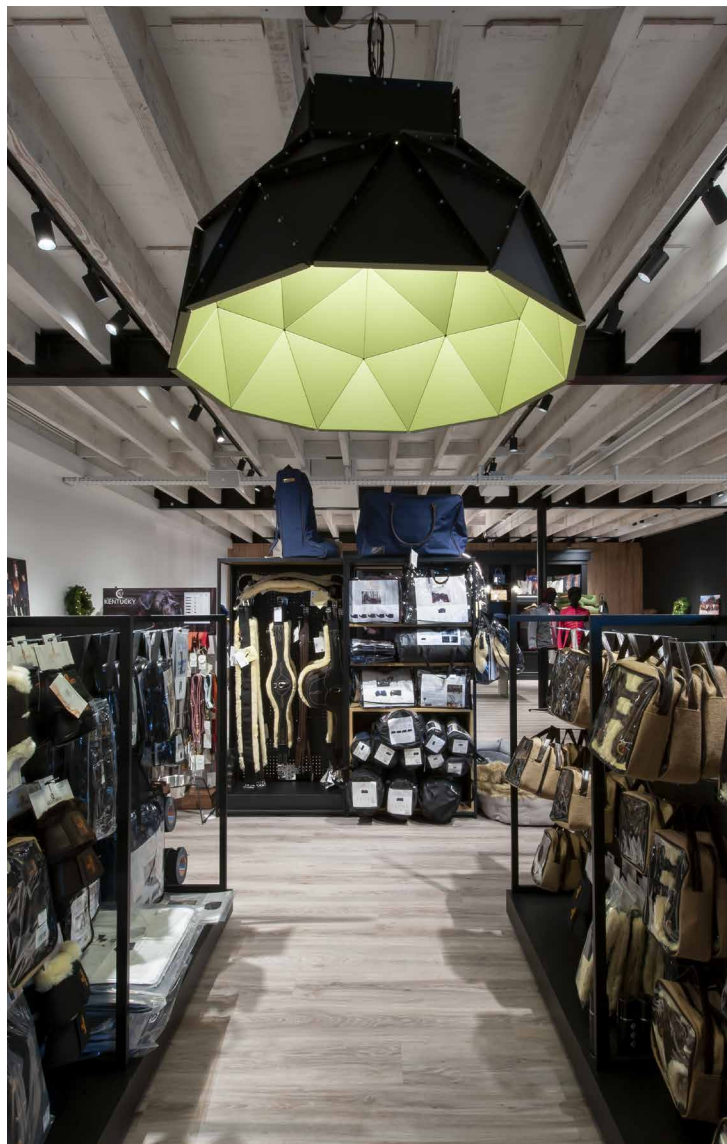



APOLLO
740-BB-001-DD-II(I)
740-BB-930002-DD-II(I)-K

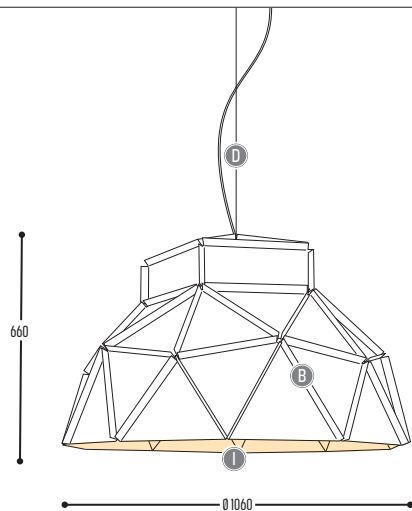

BB(B)	COLOR OUTSIDE	02		Black
		03		White
		10		Inox
CCC	TYPE E27	001		LED / Globe (MAX 15 W)
EFF	CRI • LUMENOUTPUT	930	>90 CRI • 3300 Lm / 750 mA / 24,9 W	
GG	REFLECTOR	00	N.A.	
H	COLOR TEMP.	2	2700 K	
DD	SUSP. CABLE	02	2,5 m	
		03	5 m	
II(I)	COLOR INSIDE	02		Black
		03		White
		101		Soft Pink
		103		Soft Blue
		104		Soft Green
		124		Kaki
		140		Old Pink
		141		Terracotta Red
		142		Oxide Red
		111		Brass Finish
		112		Gold Finish
		137		Bronze Finish
K	DRIVER	0	Non dimmable (intern)	
		2	Dimmable 1-10 V (intern)	
		3	Dali (intern)	

Stainless steel



APETITO


design dark studio for dark



APETITO

IP20 3040-BB-90538H-K

IP44 3041-BB-90538H-K




BB(B)	COLORS	02	Black
		03	White
EFF	CRI • LUMENOUTPUT	905	>90 CRI • 1 x 550 Lm / 180 mA / 6,4 W
GG	REFLECTOR	38	38°
H	COLOR TEMP.	2	2700 K
		3	3000 K
K	DRIVER	1	No driver
		0	Non dimmable (extern)
		2	Dimmable 1-10 V (extern)
		3	Dali (extern)
		4	Phase cut (extern)

Alu



ATSJI

design skwon for dark

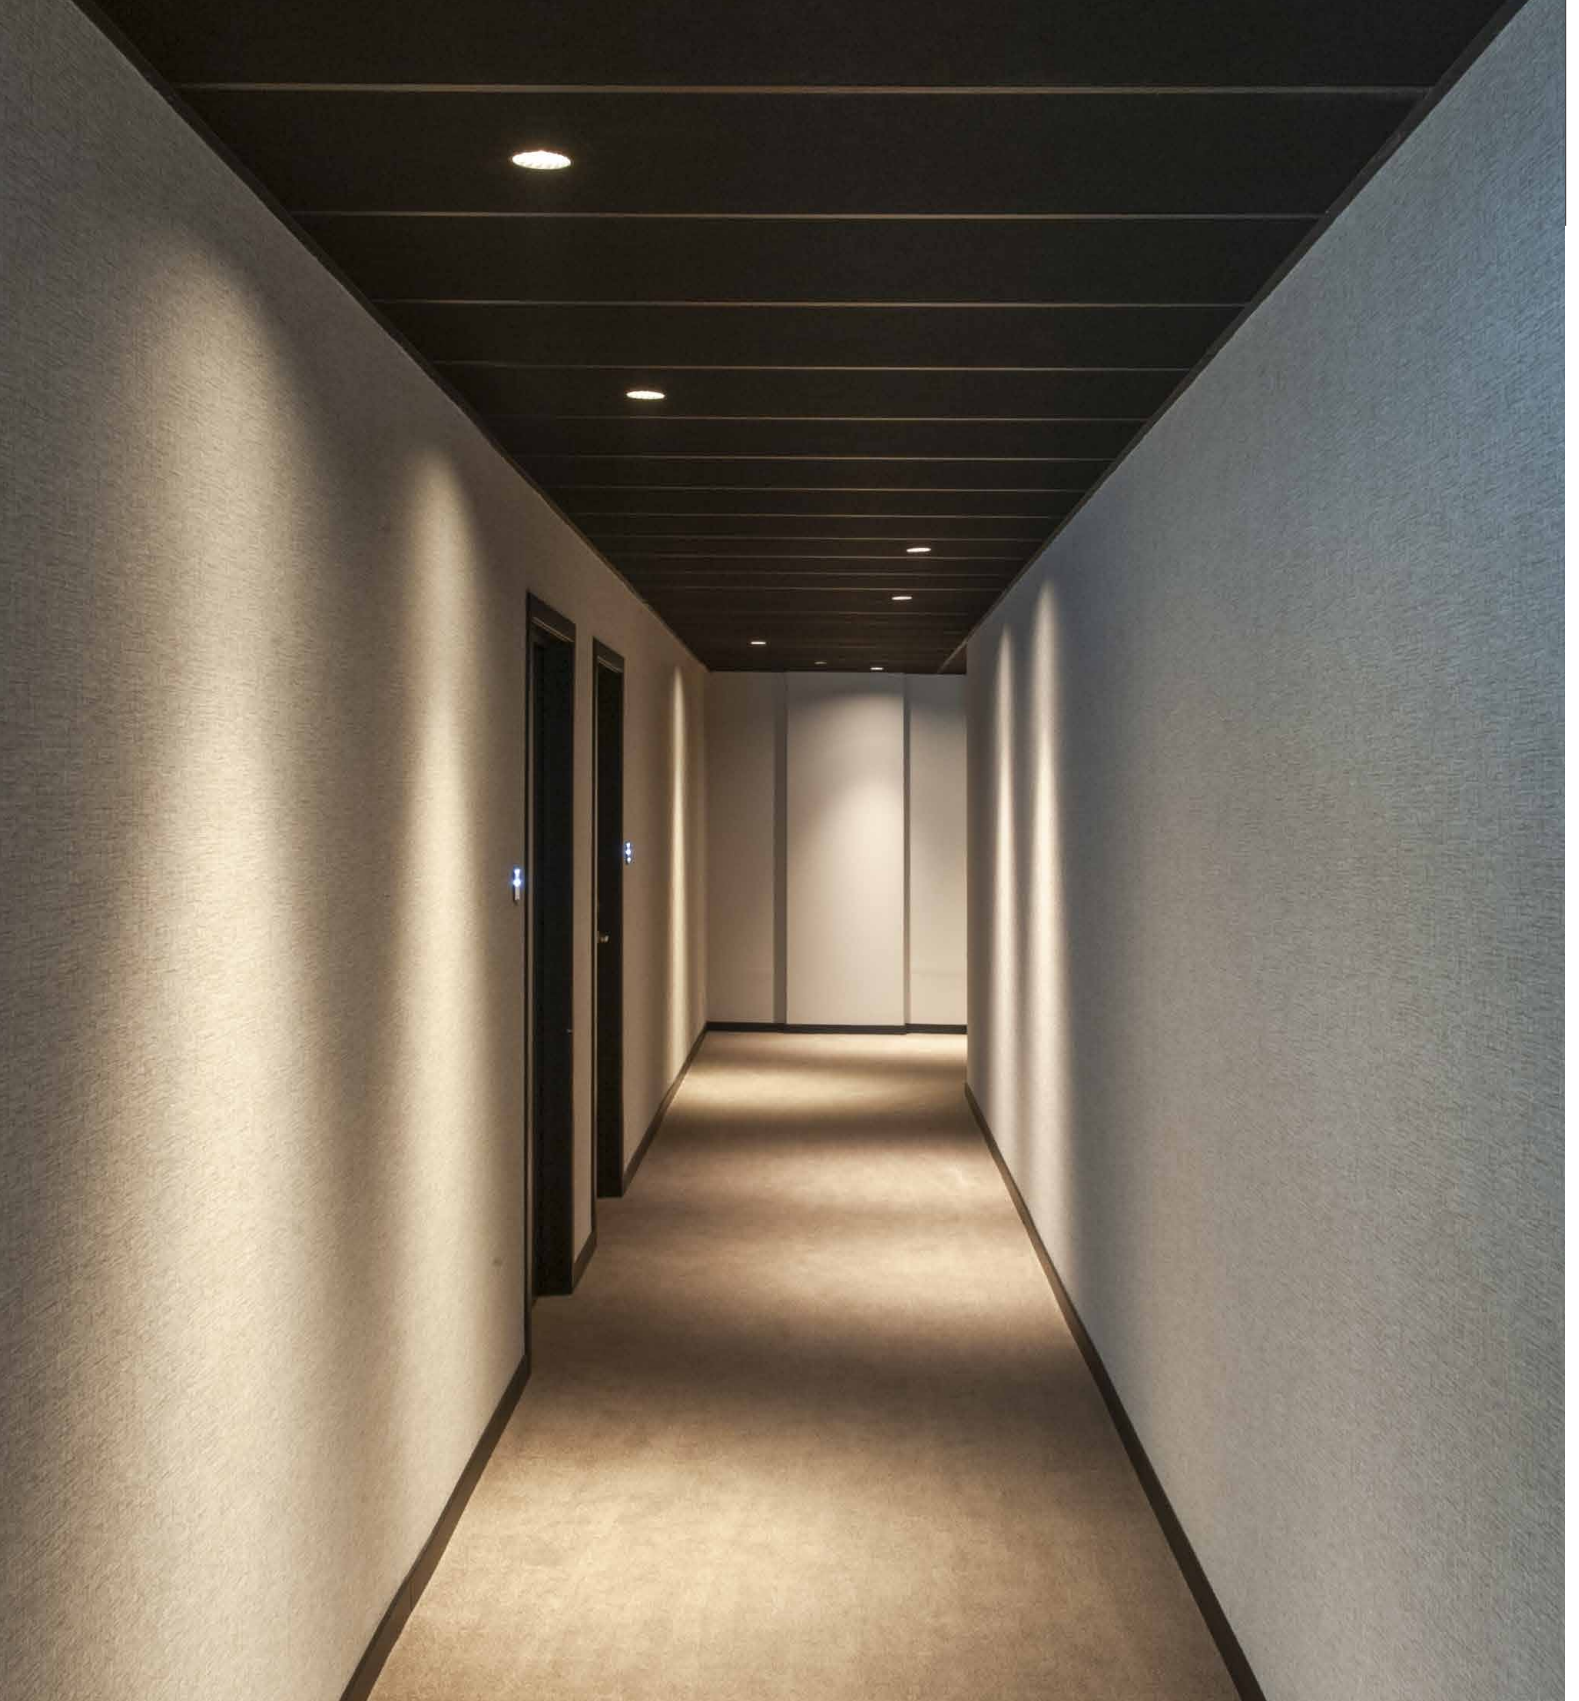



ATSJI

IP20 1335-BB(B)-EFFGGH-K

IP44 1336-BB(B)-EFFGGH-K



92




Ø 86 mm

ATSJI MOVE

IP20 1337-BB(B)-EFFGGH-K

IP44 1338-BB(B)-EFFGGH-K



92




Ø 86 mm

ATSJI BOX I

IP20 1339-BB(B)-EFFGGH-II(I)-K









IP44 1330-BB(B)-EFFGGH-II(I)-K



102

92




BB(B)	COLOR OUTSIDE	02		Black	
		03		White	
		111		Brass Finish	
			RAL color on request		
EFF	CRI • LUMENOUTPUT	907	>90 CRI • 1 x 750 Lm / 180 mA / 7W		
		910	>90 CRI • 1 x 1000 Lm / 250 mA / 9W		
		914	>90 CRI • 1 x 1400 Lm / 350 mA / 14W		
GG	REFLECTOR	12	12°		
		34	34°		
		60	60°		
H	COLOR TEMP.	2	2700 K		
		3	3000 K		
II(I)	COLOR INSIDE only ATSJI C	02		Black	
		03		White	
		111		Brass Finish	
			RAL color on request		
K	DRIVER	1	No driver		
		0	Non dimmable (extern) / except for ATSJI BOX I (intern)		
		2	Dimmable 1-10 V (extern)		
		3	Dali (extern)		
		4	Phase-cut (extern) / except for ATSJI BOX I (intern)		

Alu



ATSJOEM


design dark studio for dark

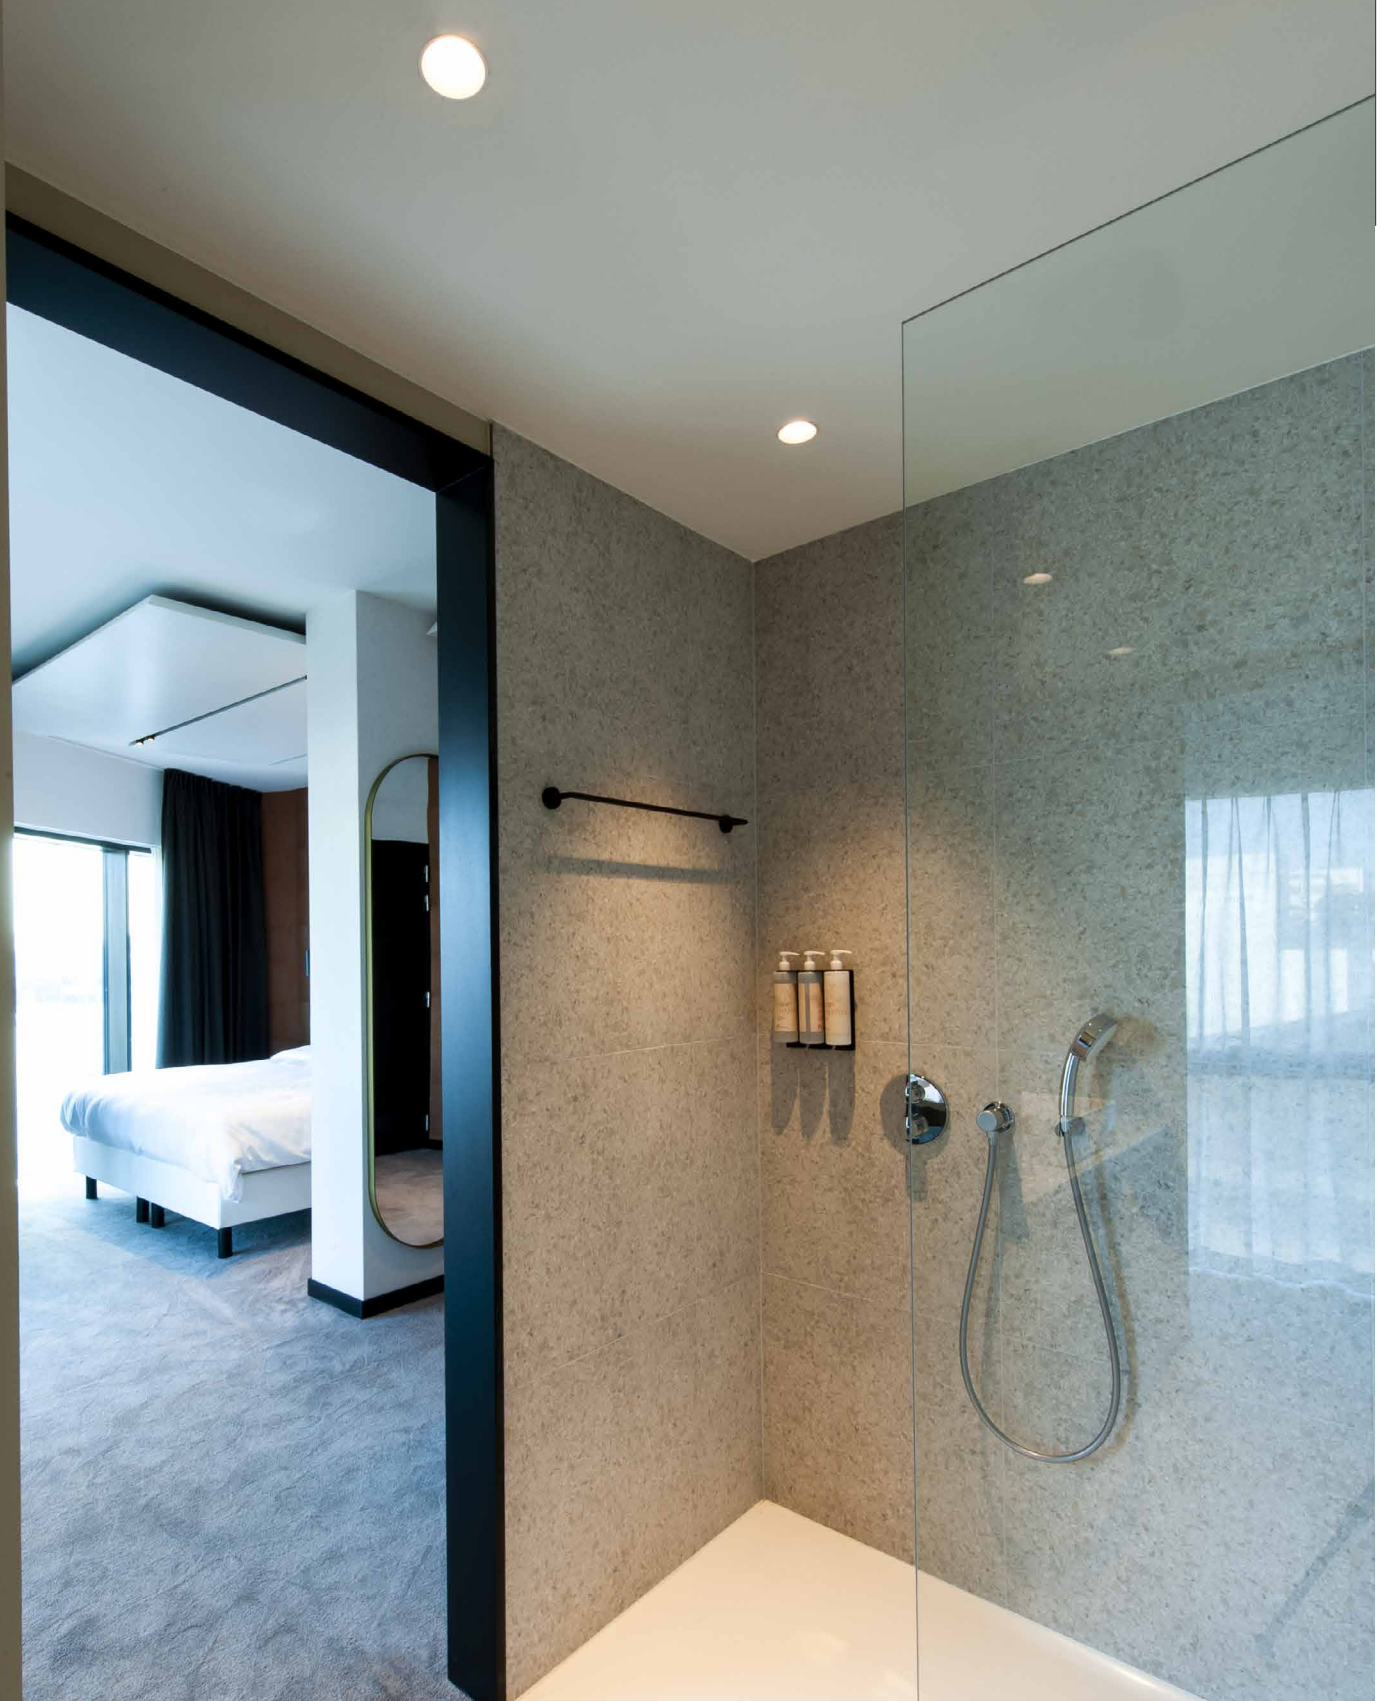




ATSJOEM

IP20 2121-BB-909GGH-K
IP44 2122-BB-909GGH-K




ATSJOEM MOVE

IP20 2123-BB-909GGH-K



ATSJOEM BOX

IP20 2124-BB-909GGH-K
IP44 2125-BB-909GGH-K



BB	COLORS	02	Black
		03	White
EFF	CRI • LUMENOUTPUT	909	>90 CRI • 1 x 780 Lm / 180 mA / 7W
		GG	REFLECTOR
H	COLOR TEMP.	12	12°
		34	34°
		60	60°
K	DRIVER	2	2700 K
		3	3000 K
K	DRIVER	1	No driver
		0	Non dimmable (extern)
		3	Dali (extern)
		4	Phase-cut (extern)

Alu



AUSUM

design alex de witte for dark












AUSUM S
1050-BB-001-DD-EE

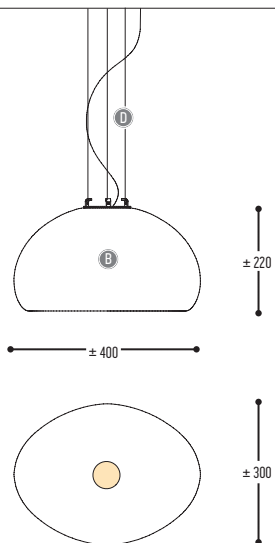

AUSUM
1051-BB-001-00

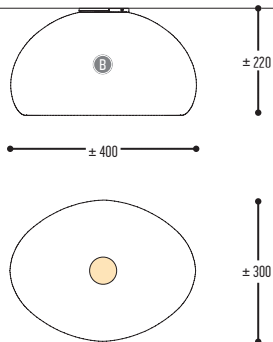

AUSUM JR.
1056-BB-001-00



BB	COLORS	30		Silver
		31		Gold
CCC	TYPE E27	001		LED (MAX 12 W)
DD	SUSP. CABLE	01	1,5 m	
		02	2,5 m	
EE	SUSP. KIT	02		Black
		2		White

Glass - Steel



BABY BUBBLE

design alex de witte for dark



DESIGN PLUS

powered by: **light+building**

**DISTRICT
AWARD 2013
1ST PRICE**



reddot design award
winner 2014




German
Design Award
2015
NOMINEE





BABY BUBBLE
1005-BB-001-DD-LL
1005-BB-905002-DD-K-II(I)-LL

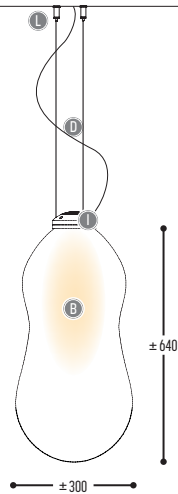

BB	COLOR OUTSIDE	00	Transparent
		49	Amber
		58	Smoke
CCC	TYPE E27	001	LED (MAX 12 W)
EFF	CRI • LUMENOUTPUT	905	>90 CRI • 1000 Lm / 250 mA / 8,5 W
GG	REFLECTOR	00	N.A.
H	COLOR TEMP.	2	2700 K
DD	SUSP. CABLE	01	1,5 m
		02	2,5 m
K	DRIVER	1	No driver
		0	Non dimmable (intern)
		2	Dimmable 1-10 V (intern)
		3	Dali (intern)
		4	Phase cut (intern)
II(I)	COLOR TOP	10	Alu
		113	Gold Ano
		RAL color on request	
LL	SUSP KIT	02	Black
		03	White



BALLZZZ

design anthony boelaert for dark










Flanders Insurance _ Anthony Boelaert




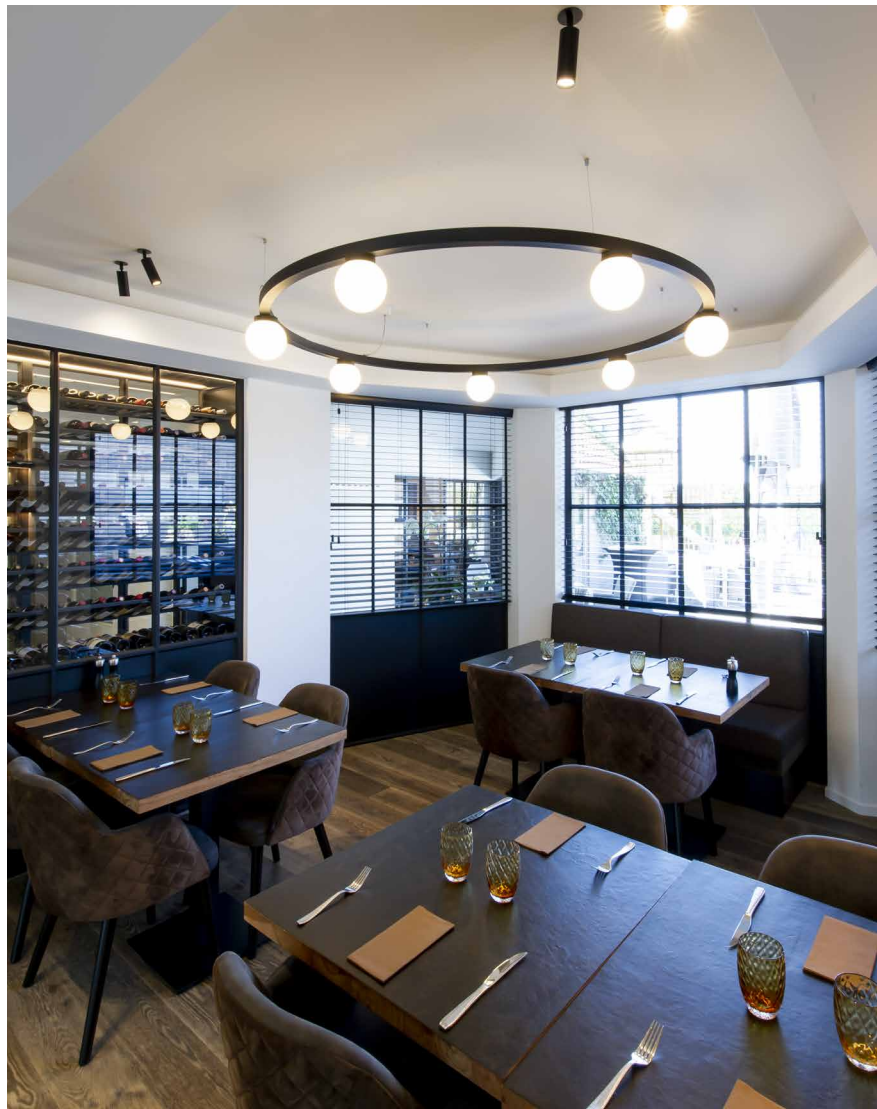


BALLZZZ ONE 950
1913-BB-90600H-DD-K





— 950 —

BALLZZZ ONE 1200
1915-BB-90600H-DD-K





— 1200 —

BALLZZZ ONE 1500
1916-BB-90600H-DD-K



— 1500 —

BALLZZZ ONE 1800
1917-BB-90600H-DD-K














— 1800 —

BALLZZZ TWO 1200
2003-BB-90600H-DD-K

BALLZZZ TWO 1500
2005-BB-90600H-DD-K

BALLZZZ TWO 1800
2006-BB-90600H-DD-K

BALLZZZ TWO 2200
2007-BB-90600H-DD-K

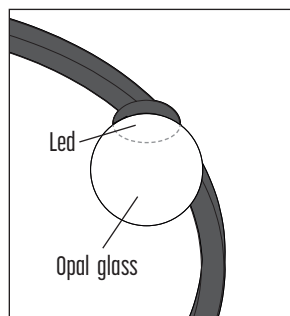

BB	COLOR RING	02	Black		
		03	White		
		RAL color on request			
EFF	CRI • LUMENOUTPUT	906	>90 CRI • 600 Lm / 350 mA / 6,4 W (per ball)		
		GG	REFLECTOR	00	N.A.
		H	COLOR TEMP.	2	2700 K
3	3000 K				
DD	SUSP. CABLE	01	1,5 m		
		02	2,5 m		
		03	5 m		
K	DRIVER	0	Non dimmable (intern)		
		2	Dimmable 1-10 V (intern)		
		3	Dali (intern)		



BALLZZZ FDR

design anthony boelaert for dark








Argento




Possibilities


E27 fitting
order lamps
see page 484




down outside




down inside



up outside





up inside





double down

BALLZZZ FDR 950
1913-BB-001-DD-J





950

BALLZZZ FDR 1200
1915-BB-001-DD-J





1200

BALLZZZ FDR 1500
1916-BB-001-DD-J







1500

BALLZZZ FDR 1800
1917-BB-001-DD-J



1800

BB	COLOR RING	02		Black
		03		White
		 RAL color on request		
CCC	TYPE E27	001		LED (MAX 10 W)
DD	SUSP. CABLE	01	1,5 m	
		02	2,5 m	
		03	5 m	
J	UP DOWN TYPE	0	down outside	
		1	down inside	
		2	up outside	
		3	up inside	
		4	double down	



BANGSTER

design dark studio & christoph adlfinger-pullmann for dark

Die Lichtgestalter archicutt photo@becker-medien









BANGSTER S

2140-BB(B)-071GG0-DD-II
2140-BB(B)-904GGH-DD-II-K

**BANGSTER DOUBLE**

2148-BB(B)-071900-II
2148-BB(B)-90490H-II-K

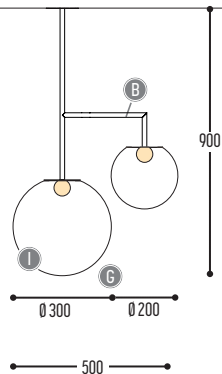


BB(B)	COLORS	02	Black
		03	White
		RAL color on request	
CCC	TYPE G9	071	LED (MAX 6 W)
EFF	CRI • LUMENOUTPUT	904	>90 CRI • 600 Lm / 350 mA / 6 W
GG	GLOBE	SINGLE	20 0200
			30 0300
		DOUBLE	90 0200 • 0300
H	COLOR TEMP.	0	N.A.
		1	2200 K
		2	2700 K
		3	3000 K
DD	SUPS. CABLE	01	1,5 m
		02	2,5 m
II	GLOBE color	00	Transparent
		13	Glass White
K	DRIVER	1	No driver
		0	Non dimmable (intern)
		2	Dimmable 1-10 V (intern)
		3	Dali (intern)
		4	Phase cut (intern)

Alu - Glass




BANGSTER WALL 1

2141-BB-071200-II
2141-BB-90420H-II-K



BANGSTER WALL 2

2197-BB-071200-II-JJ(J)
2197-BB-90420H-II-JJ(J)-K

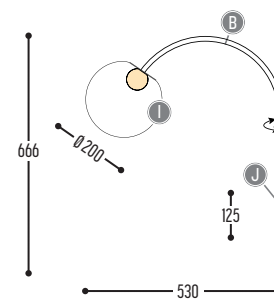

BB	COLORS	02		Black
		03		White
		RAL color on request		
CCC	TYPE G9	071		LED (MAX 6 W)
EFF	CRI • LUMENOUTPUT	904	>90 CRI • 600 Lm / 350 mA / 6 W	
GG	GLOBE	20	Ø200	
H	COLOR TEMP.	0	N.A.	
		1	2200 K	
		2	2700 K	
		3	3000 K	
II	GLOBE color	00	Transparent	
		13	Glass White	
JJ(J)	COLORS	02		Black
		03		White
		110		Brass
		RAL color on request		
K	DRIVER	1	No driver	
		0	Non dimmable (extern)	
		2	Dimmable 1-10 V (extern)	
		3	Dali (extern)	
		4	Phase cut (extern)	



BANGSTER DISK


design anthony boelaert for dark






BANGSTER DISK S

2144-BB(B)-071GG0-DD-II
2144-BB(B)-904GGH-DD-II-K



BANGSTER DISK DOUBLE

2149-BB(B)-071900-II
2149-BB(B)-90490H-II-K

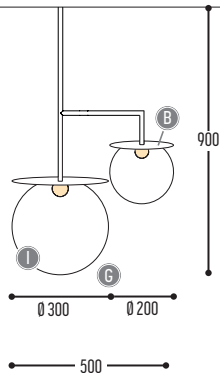

BB(B)	COLORS	02		Black
		03		White
		110		Brass
CCC	TYPE G9	071		LED (MAX 6 W)
EFF	CRI • LUMENOUTPUT	904	>90 CRI • 600 Lm / 350 mA / 6 W	
GG	GLOBE	SINGLE	20	Ø200
			30	Ø300
		DOUBLE	90	Ø200 • Ø300
H	COLOR TEMP.	0	N.A.	
		1	2200 K	
		2	2700 K	
		3	3000 K	
DD	SUPS. CABLE	01	1,5 m	
		02	2,5 m	
II	GLOBE color	00	Transparent	
		13	Glass White	
K	DRIVER	1	No driver	
		0	Non dimmable (intern)	
		2	Dimmable 1-10 V (intern)	
		3	Dali (intern)	
		4	Phase cut (intern)	


Alu - Glass






BANGSTER DISK WALL 1

2146-BB(B)-071200-II
2146-BB(B)-90420H-II-K

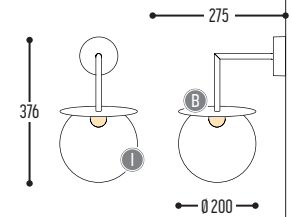


BANGSTER DISK WALL 2

2198-BB(B)-071200-II-JJ(J)
2198-BB(B)-90420H-II-JJ(J)-K

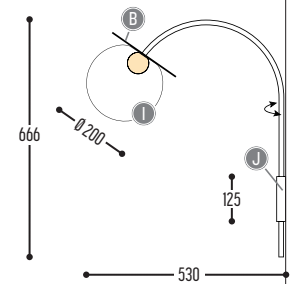

BB(B)	COLORS	02		Black
		03		White
		110		Brass
CCC	TYPE G9	071		LED (MAX 6 W)
EFF	CRI • LUMENOUTPUT	904	>90 CRI • 600 Lm / 350 mA / 6 W	
GG	GLOBE	20	Ø200	
H	COLOR TEMP.	0	N.A.	
		1	2200 K	
		2	2700 K	
		3	3000 K	
II	GLOBE color	00	Transparent	
		13	Glass White	
JJ(J)	COLORS	02		Black
		03		White
		110		Brass
K	DRIVER	1	No driver	
		0	Non dimmable (extern)	
		2	Dimmable 1-10 V (extern)	
		3	Dali (extern)	
		4	Phase cut (extern)	

Alu - Glass - Brass

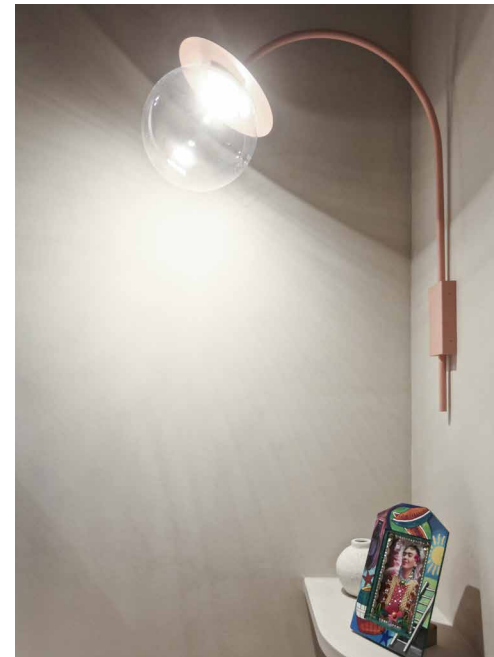


BANGSTER HOODY

design jeroen debruyne for dark








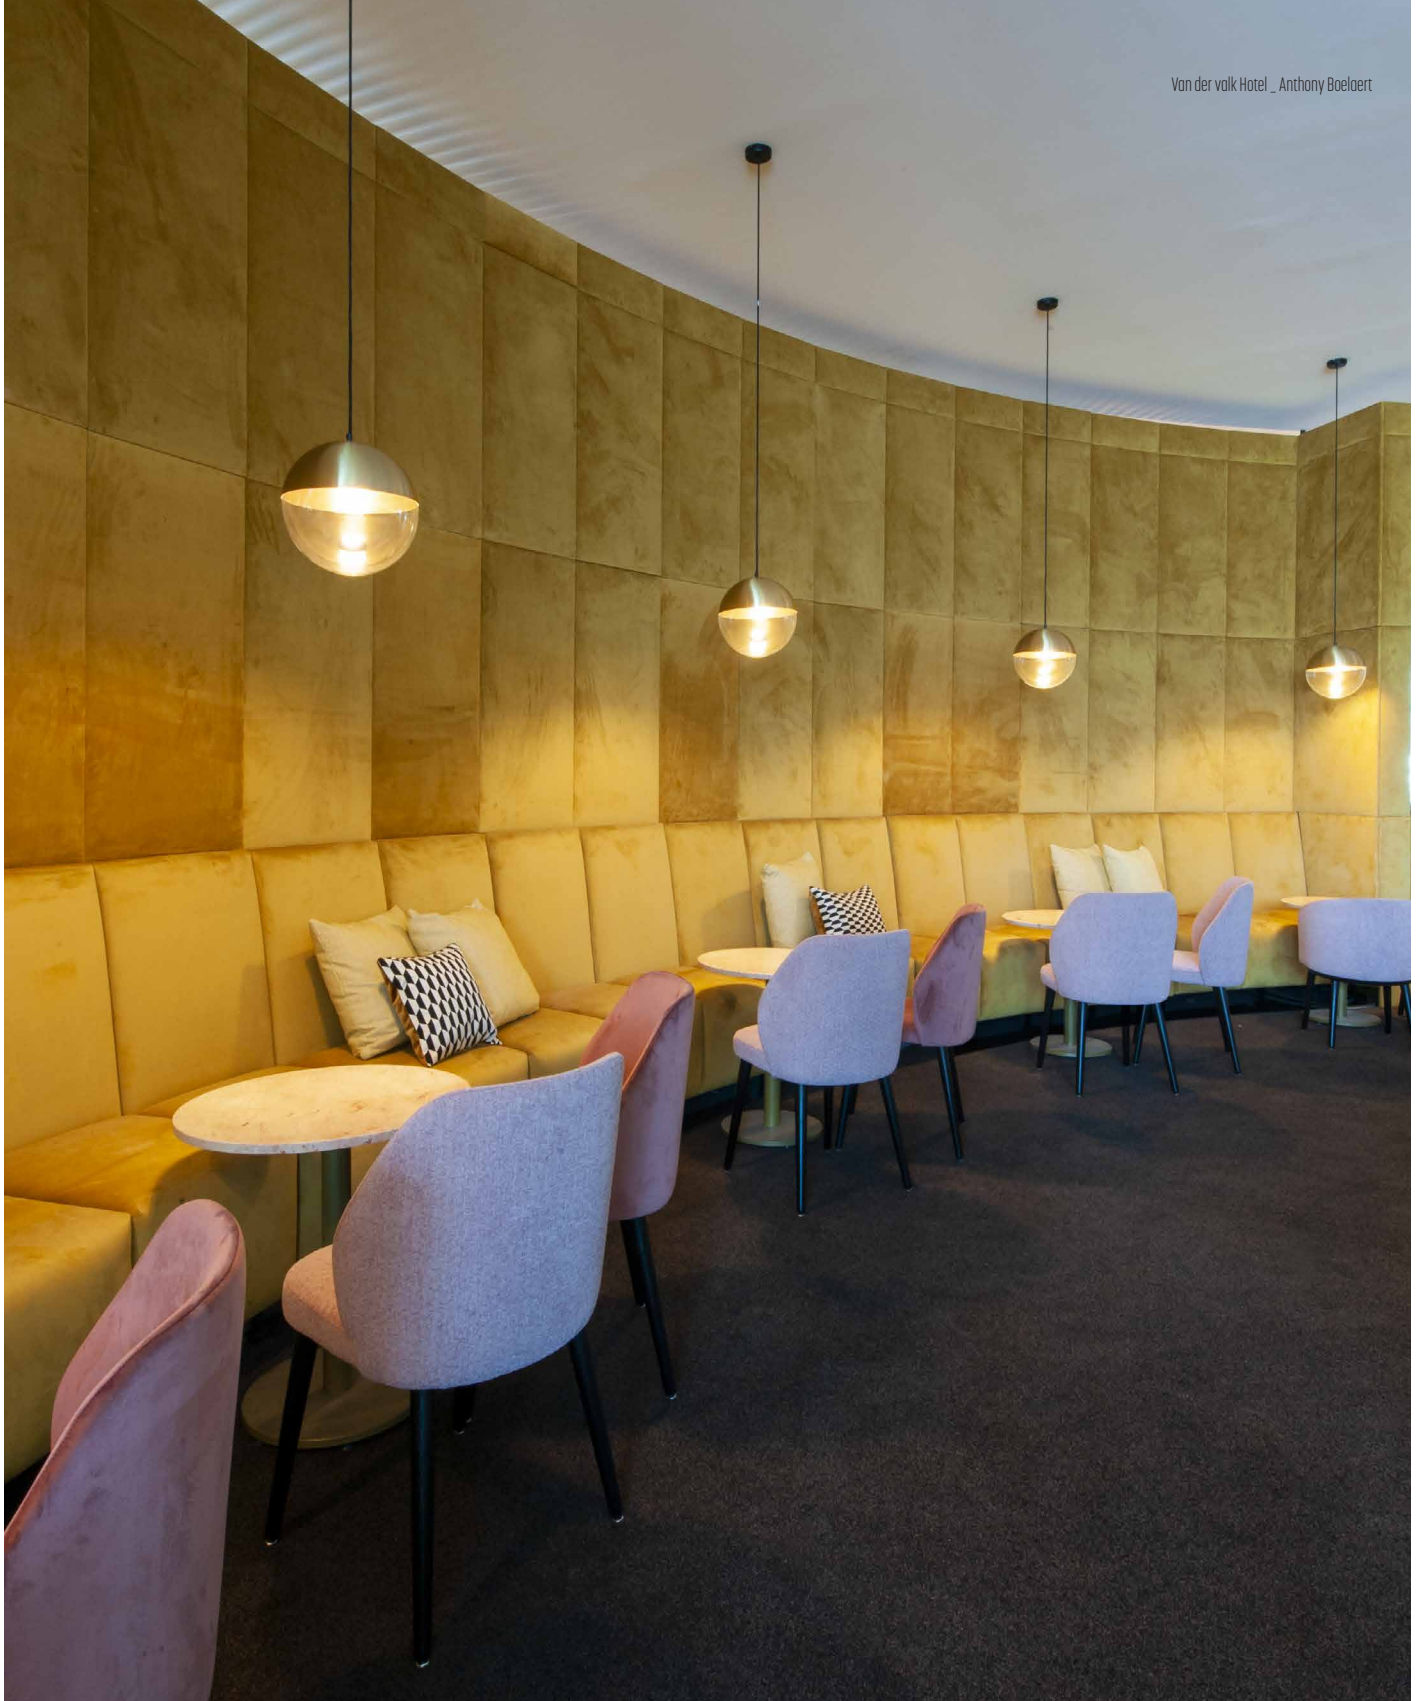






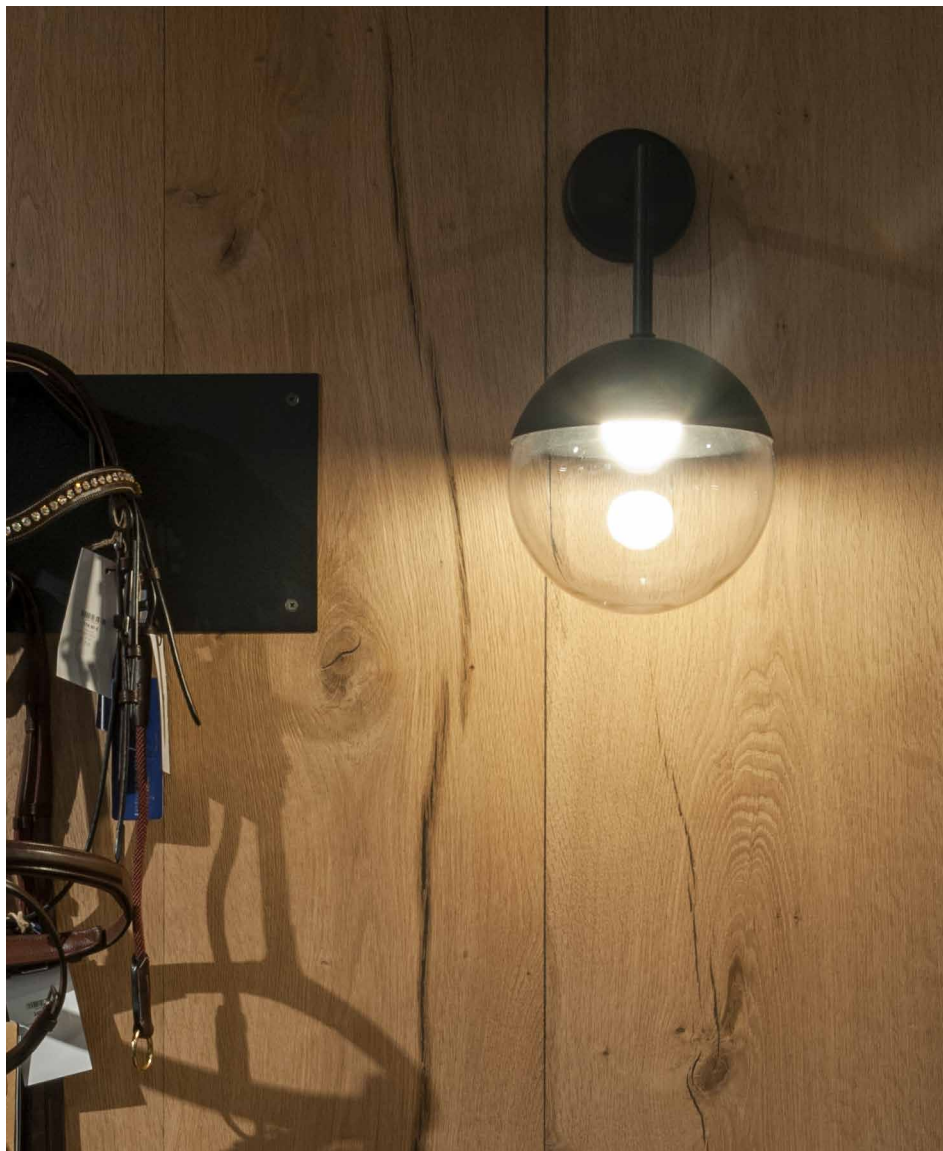


BANGSTER HOODY S

2145-BB(B)-071GG0-DD-II
2145-BB(B)-904GGH-DD-II-K

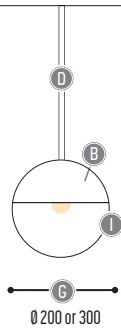

BANGSTER HOODY DOUBLE

2196-BB(B)-071900-II
2196-BB(B)-90490H-II-K

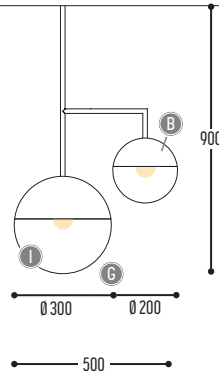


BB(B)	COLORS	02		Black
		03		White
		110		Brass
CCC	TYPE G9	071		LED (MAX 6 W)
EFF	CRI • LUMENOUTPUT	904	>90 CRI • 600 Lm / 350 mA / 6 W	
GG	GLOBE dimension	SINGLE	20	Ø200
			30	Ø300
		DOUBLE	90	Ø200 • Ø300
H	COLOR TEMP.	0	N.A.	
		1	2200 K	
		2	2700 K	
		3	3000 K	
DD	SUPS. CABLE	01	1,5 m	
		02	2,5 m	
II	GLOBE color	00	Transparent	
		13	Glass White	
K	DRIVER	1	No driver	
		0	Non dimmable (intern)	
		2	Dimmable I-10 V (intern)	
		3	Dali (intern)	
		4	Phase cut (intern)	

Alu - Glass - Brass




BANGSTER HOODY WALL 1

2147-BB(B)-071200-II
2147-BB(B)-90420H-II-K



BANGSTER HOODY WALL 2

2199-BB(B)-071200-II-JJ(J)
2199-BB(B)-90420H-II-JJ(J)-K

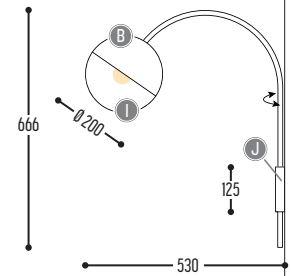


BB(B)	COLORS	02		Black
		03		White
		110		Brass
CCC	TYPE G9	071		LED (MAX 6 W)
EFF	CRI • LUMENOUTPUT	904	>90 CRI • 600 Lm / 350 mA / 6 W	
GG	GLOBE	20	Ø200	
H	COLOR TEMP.	0	N.A.	
		1	2200 K	
		2	2700 K	
		3	3000 K	
II	GLOBE color	00	Transparent	
		13	Glass White	
JJ(J)	COLORS	02		Black
		03		White
		110		Brass
K	DRIVER	1	No driver	
		0	Non dimmable (extern)	
		2	Dimmable 1-10 V (extern)	
		3	Dali (extern)	
		4	Phase cut (extern)	

Alu - Glass - Brass




BOKY



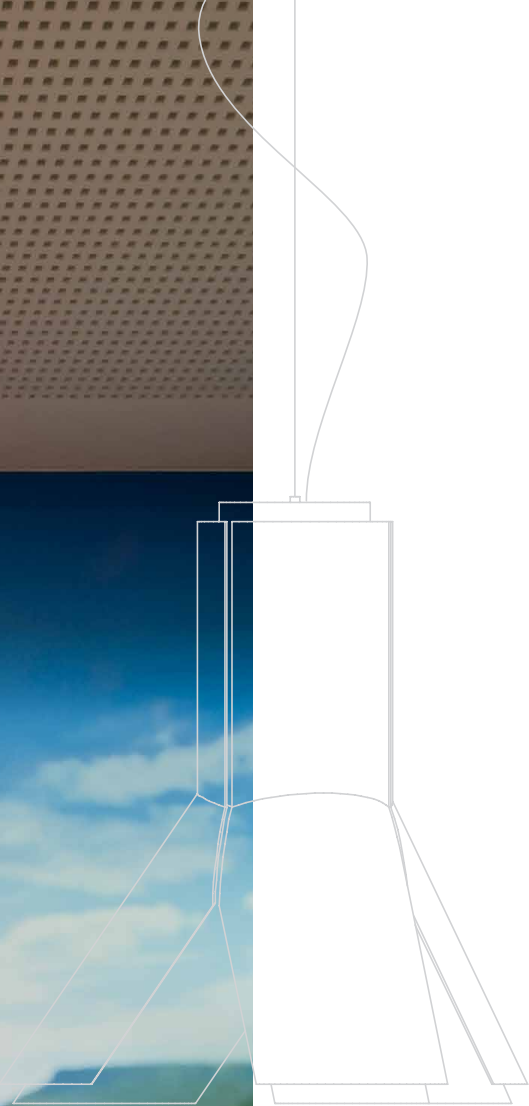




design frank janssens for dark

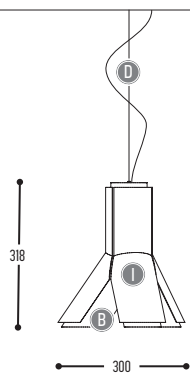



BOKY
820-BB-001-DD-I



BB	COLOR OUTSIDE	03		White
		04		Red
		08		Orange
CCC	TYPE E27	001		LED / Globe (MAX 12 W)
DD	SUSP. CABLE	01	1,5 m	
		02	2,5 m	
I	COLOR SHELLS	B		Black
		W		White
				RAL color on request



Alu - PE



CAPITANO

design dark studio for dark

CAPITANO
1086-67-001-DD

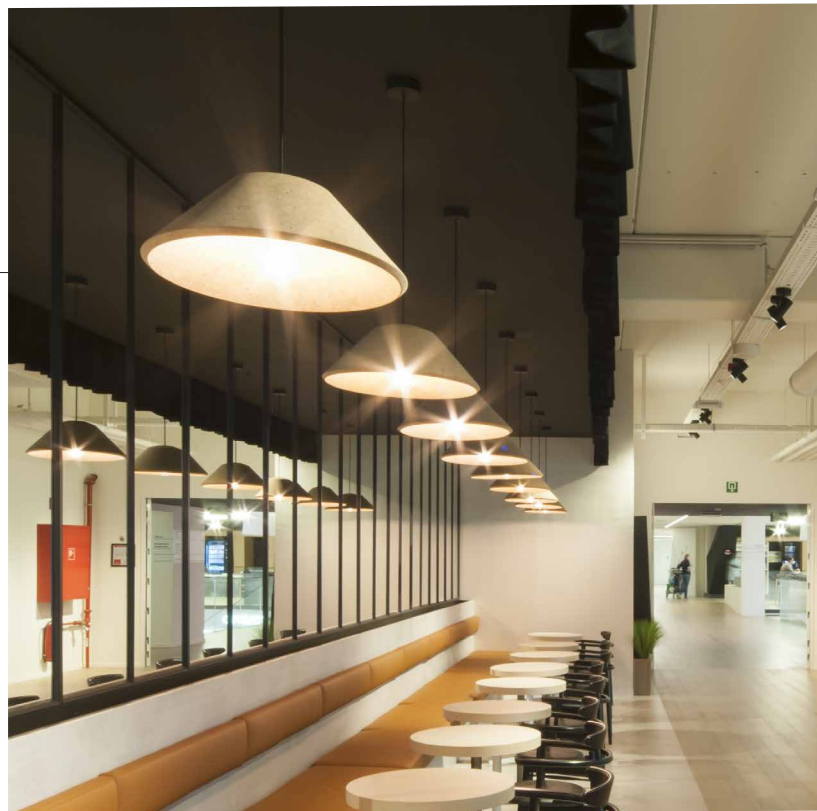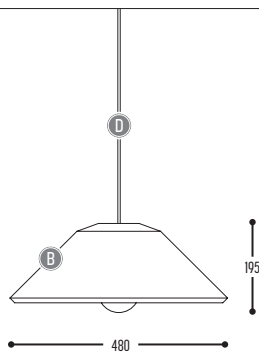


BB	COLORS	67	Cork
CCC	TYPE E27	001	LED / Globe (MAX 15 W)
DD	SUSP. CABLE	01	1,5 m
		02	2,5 m


Cork



CAPTAIN CORK

design miguel arruda for dark

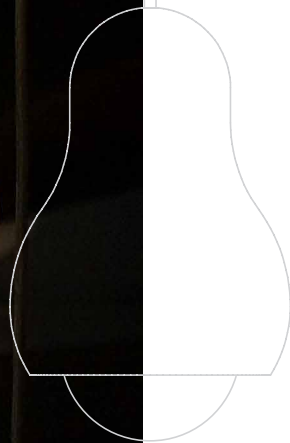


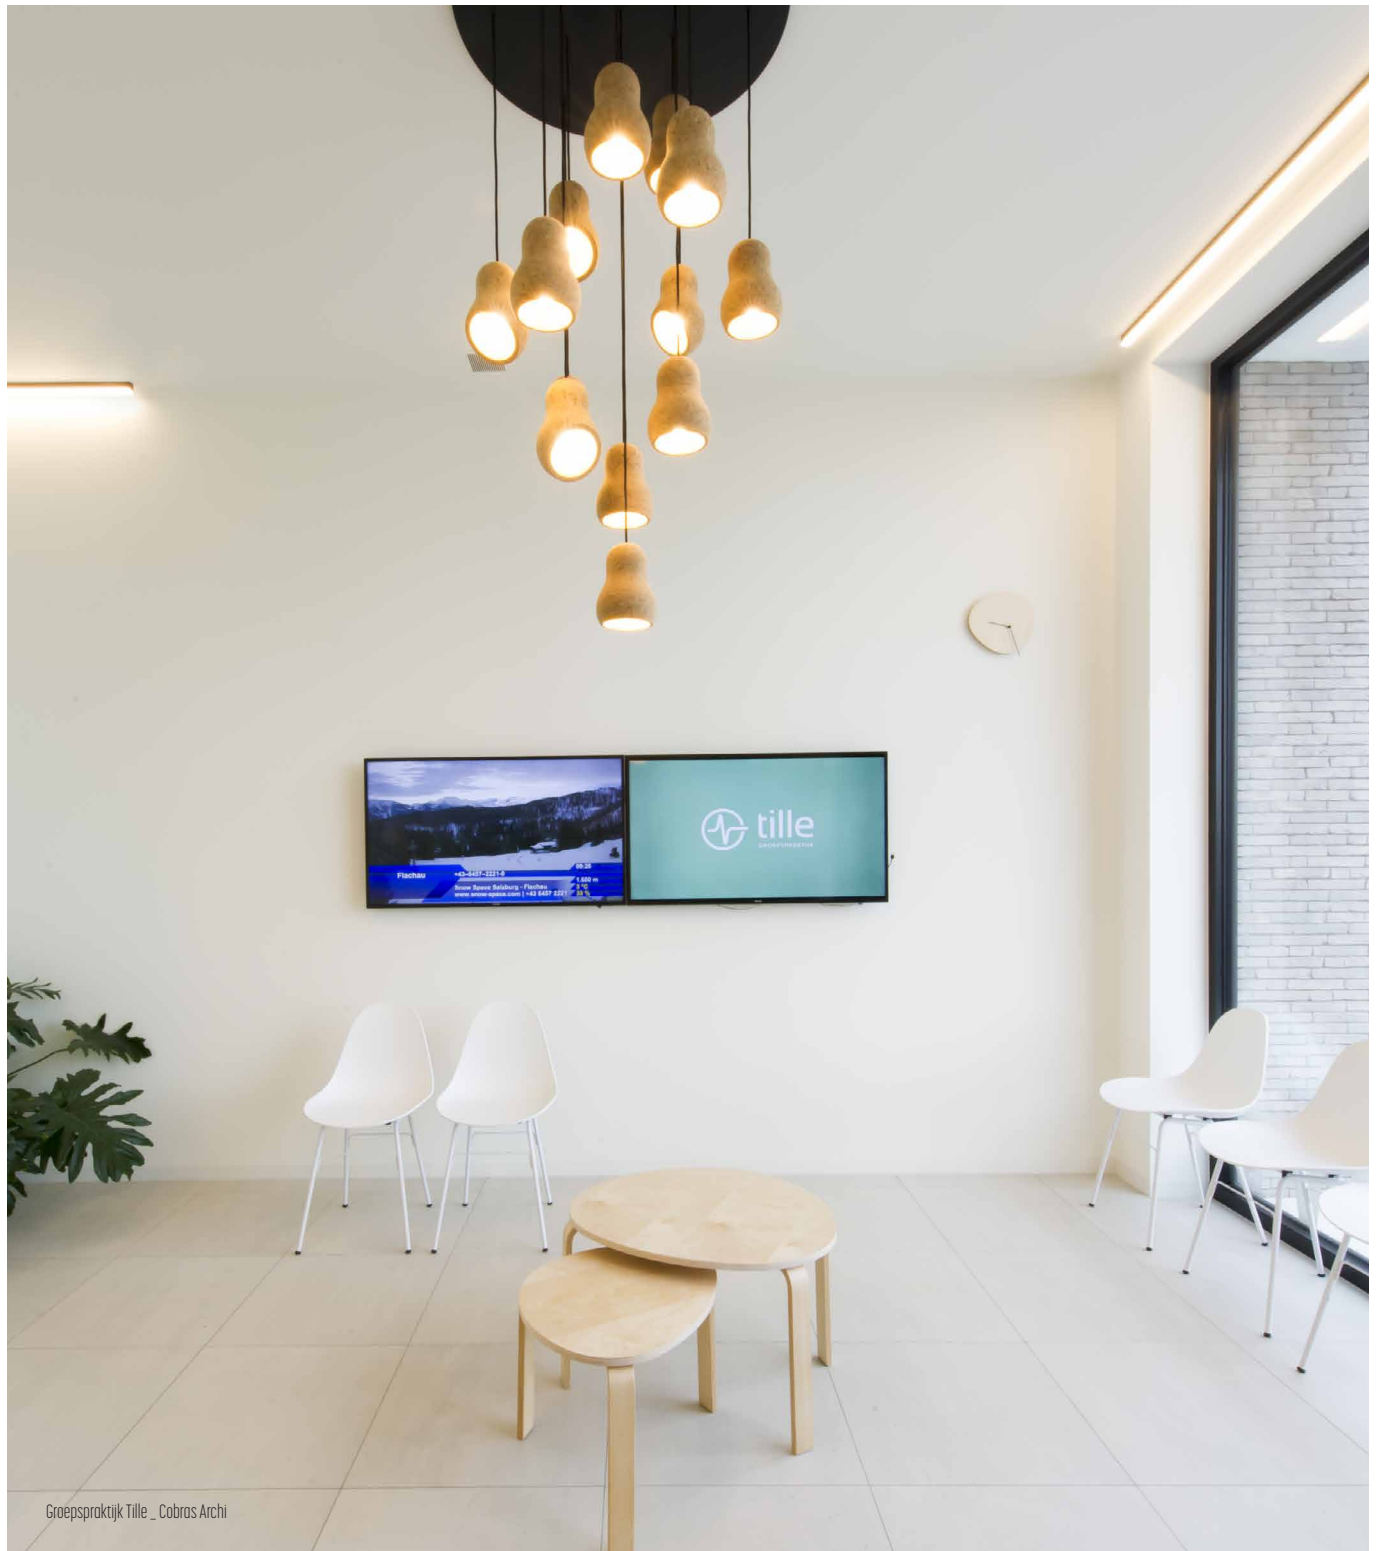







CAPTAIN CORK S
1020-67-001-DD




CAPTAIN CORK 45S
1021-67-001-DD



CAPTAIN CORK MAX S
1022-67-001-DD




CAPTAIN CORK CLUB3
1023-67-001-DD



ceiling base standard matt black
on request other colors possible

CAPTAIN CORK CLUB5
1024-67-001-DD



ceiling base standard matt black
on request other colors possible

BB	COLORS	67	Cork
CCC	TYPE E27	001	LED / Globe (MAX 10 W)
DD	SUSP. CABLE	01	1,5 m
		02	2,5 m

Cork



CIGAR

design dark studio for dark











Van der Valk Hotel _ Anthony Boelaert



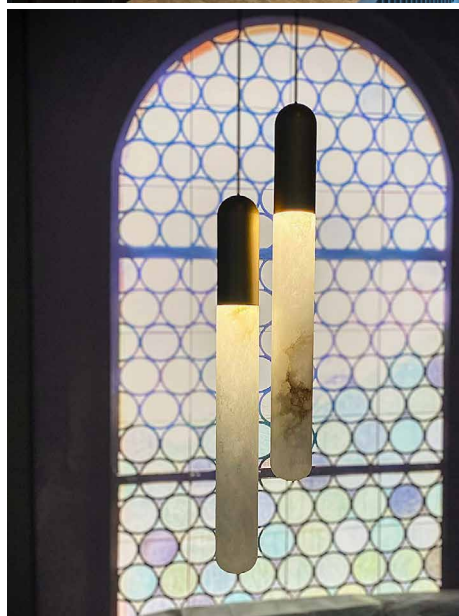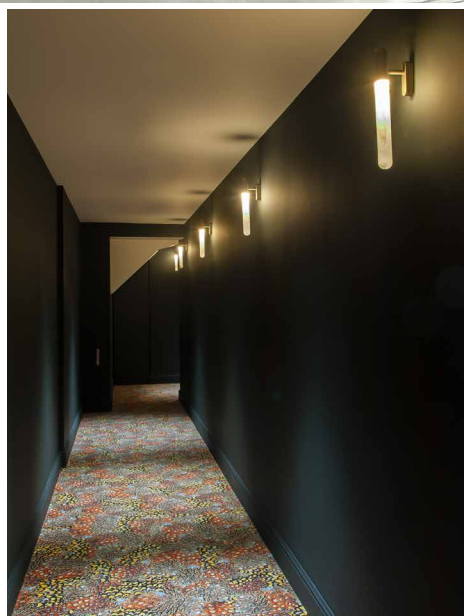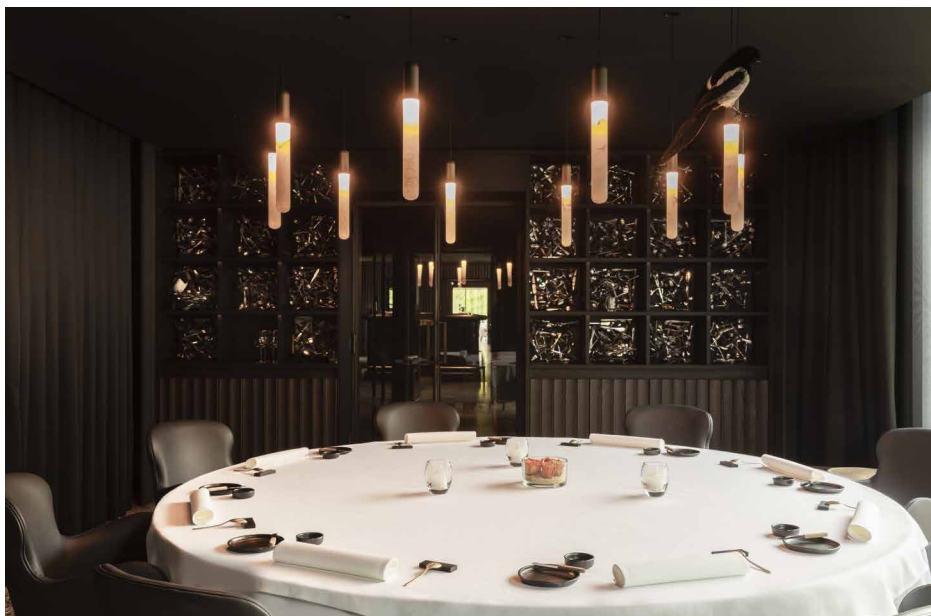


CIGAR 30.1 S

2501-BB(B)-90400H-DD-II(I)-K



CIGAR 30.1 S2

2541-BB(B)-90400H-DD-II(I)-K




CIGAR 30.2 S

2502-BB(B)-90400H-DD-II(I)-K




CIGAR 30.2 S2

2542-BB(B)-90400H-DD-II(I)-K




CIGAR 30.3 S

2503-BB(B)-90400H-DD-II(I)-K



CIGAR 30.3 S2

2543-BB(B)-90400H-DD-II(I)-K




BB(B)	COLORS	13	Glass White
		134	Alabaster
EFF	CRI • LUMENOUTPUT	904	>90 CRI • 400 Lm / 250 mA / 4,2 W
GG	REFLECTOR	00	N.A.
		1	2200 K
		2	2700 K
H	COLOR TEMP.	3	3000 K
DD	SUSP. CABLE	01	1,5 m
		02	2,5 m
II(I)	COLOR	02	Black
		03	White
		111	Brass Finish
		137	Bronze Finish
			RAL color on request
K	DRIVER	1	No driver
		0	Non dimmable (extern)
		2	Dimmable 1-10 V (extern)
		3	Dali (extern)
		4	Phase cut (extern)


Alu - Glass/Alabaster




CIGAR 30.6 FIX
2539-BB(B)-90400H-II(I)-K

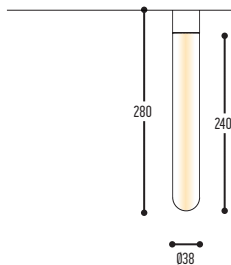


CIGAR 30.7 FIX
2540-BB(B)-90400H-II(I)-K



CIGAR 30.4 WALL
2531-BB(B)-90400H-II(I)-K



CIGAR 30.5 WALL
2533-BB(B)-90400H-II(I)-K




BB(B)	COLORS	13	Glass White
		134	Alabaster
EFF	CRI • LUMENOUTPUT	904	>90 CRI • 400 Lm / 250 mA / 4,2 W
GG	REFLECTOR	00	N.A.
H	COLOR TEMP.	1	2200 K
		2	2700 K
		3	3000 K
II(I)	COLOR	02	Black
		03	White
		111	Brass Finish
		137	Bronze Finish
			RAL color on request
K	DRIVER	1	No driver
		0	Non dimmable (extern)
		2	Dimmable 1-10 V (extern)
		3	Dali (extern)
		4	Phase cut (extern)

Alu - Glass/Alabaster



CHILL-O

design constantin wortmann & lars korb for dark

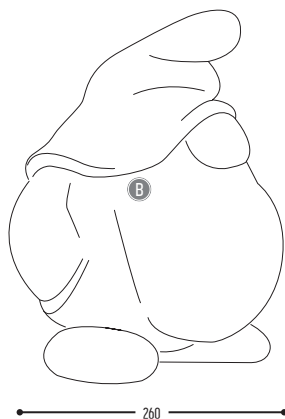

CHILL-O
2690-03-500


BB(B)	COLORS	03	White (translucent)
CCC	LED	500	RGB-W 2700K Remote Control




COOLCAT

design luc vincent & mathilde roman for dark




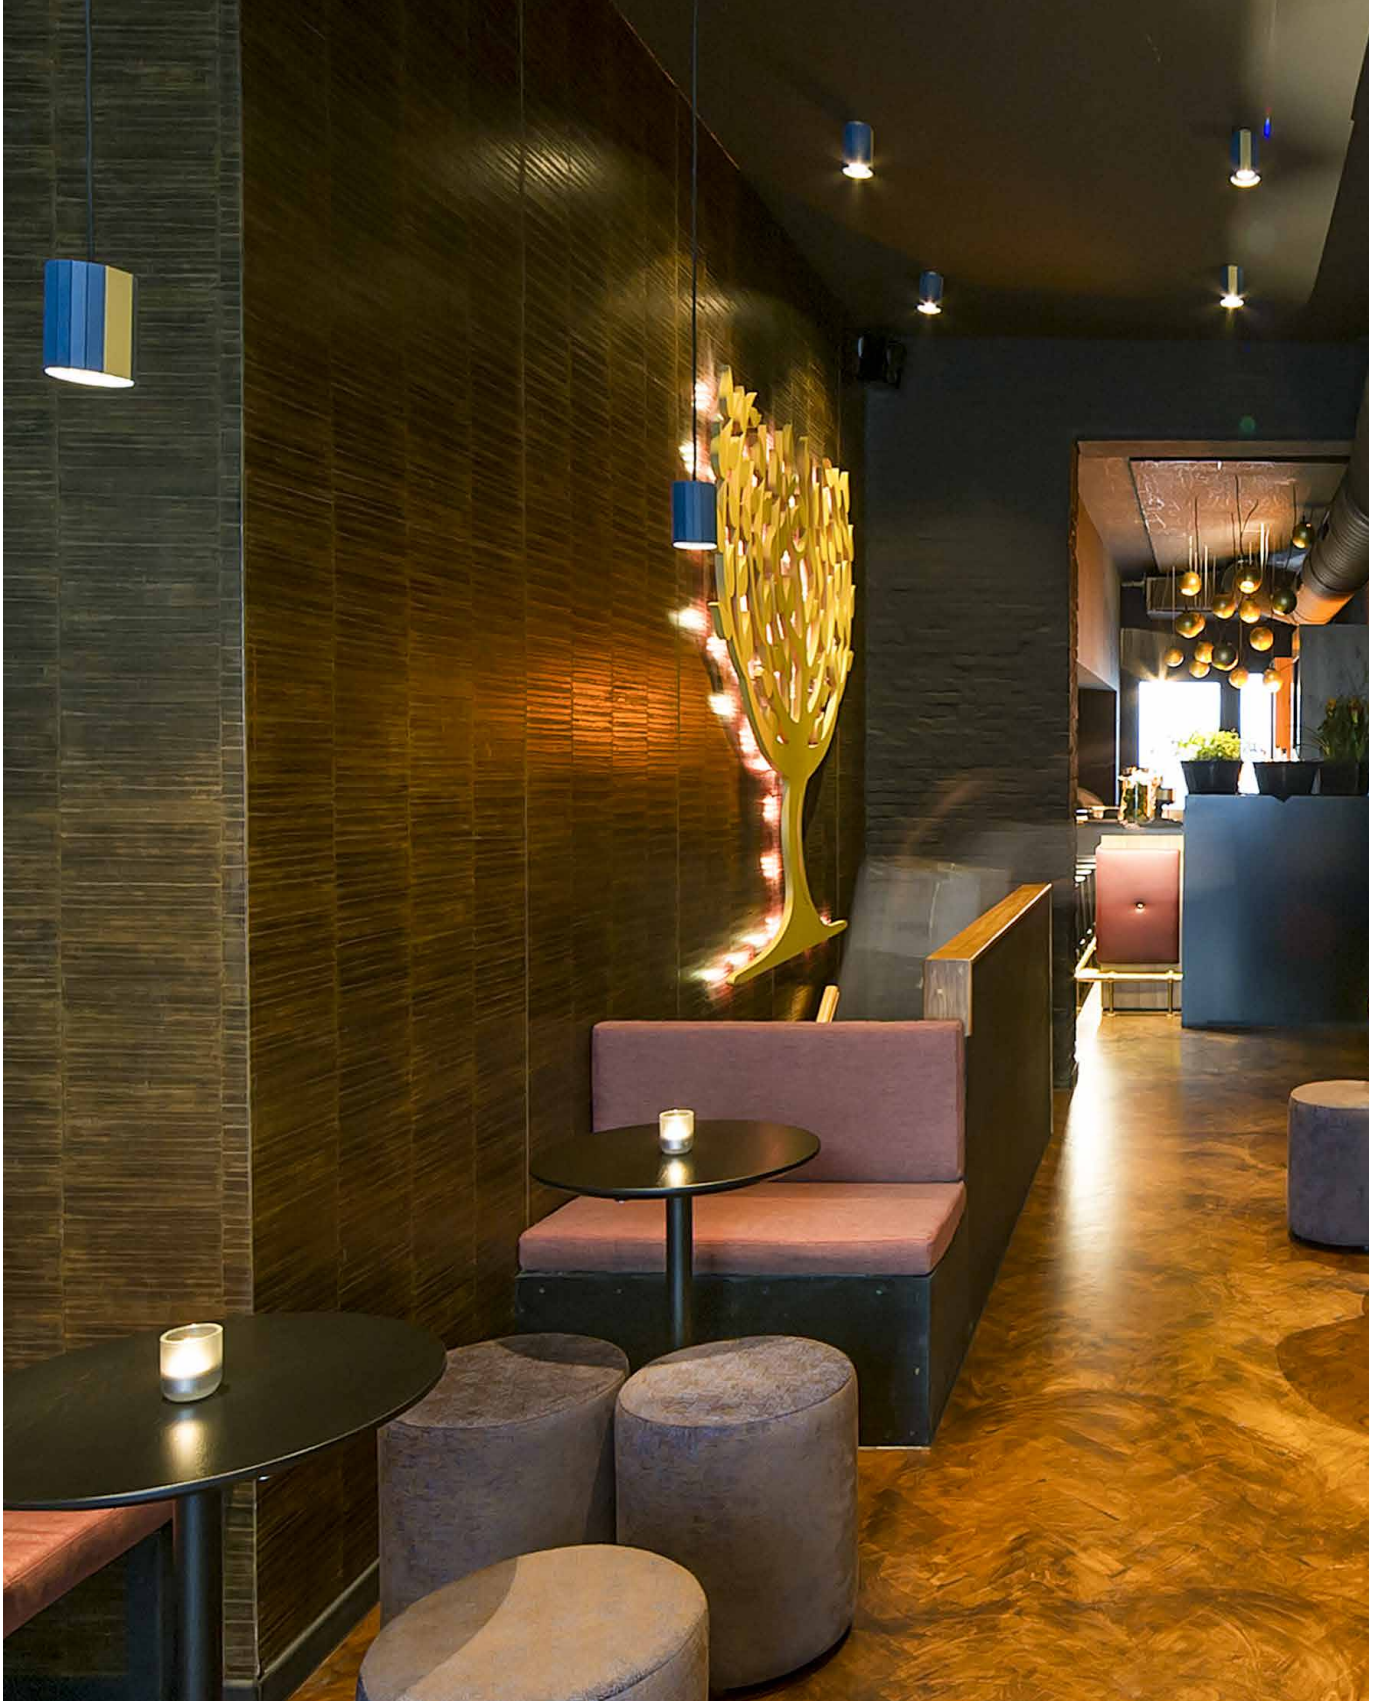

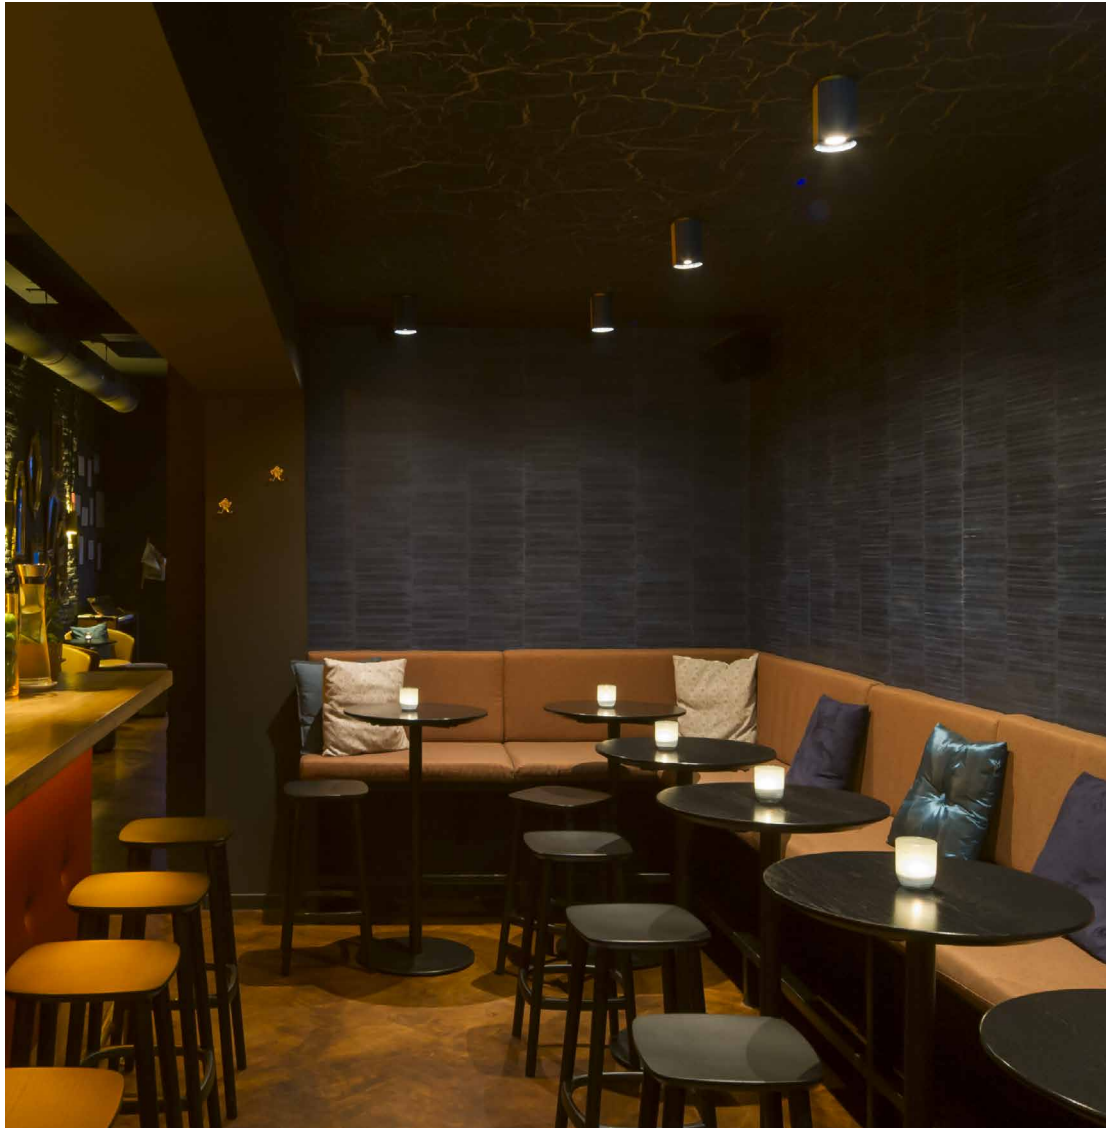


COOLCAT S

1031-BB-EFFGGH-DD-II(I)-K




COOLCAT S2

1030-BB-EFFGGH-DD-II(I)-K




COOLCAT

1032-BB-EFFGGH-00-II(I)-K




COOLCAT MOVE

1033-BB-EFFGGH-00-II(I)-K



COOLCAT SET2

1034-BB-EFFGGH-00-II(I)-K

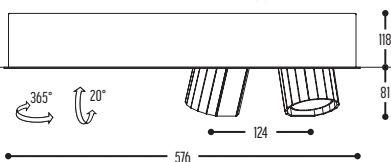

565 x 145 mm



BB	COLORS	02		Black	
		03		White	
EFF	CRI • LUMENOUTPUT	910	>90 CRI • 1100 Lm / 250 mA / 8,3 W		
		915	>90 CRI • 1500 Lm / 350 mA / 11,6 W		
GG	REFLECTOR	20	20°		
		40	40°		
		60	60°		
H	COLOR TEMP.	2	2700 K		
		3	3000 K		
		4	4000 K		
DD	SUSP. CABLE	00	N.A.		
		01	1,5 m		
		02	2,5 m		
II(I)	COLOR INSERT	02		Black	
		03		White	
		101		Soft Pink	
		103		Soft Blue	
		104		Soft Green	
		124		Kaki	
		140		Old Pink	
		141		Terracotta Red	
		142		Oxide Red	
		111		Brass Finish	
		112		Gold Finish	
		137		Bronze Finish	
			RAL color on request		
K	DRIVER	1	No driver		
		0	Non dimmable (extern)		
		2	Dimmable 1-10 V (extern)	Except	
		3	Dali (extern)	Coolcat S (intern)	
		4	Phase cut (extern)		


Alu-Metal



COOLFIN

design made for dark




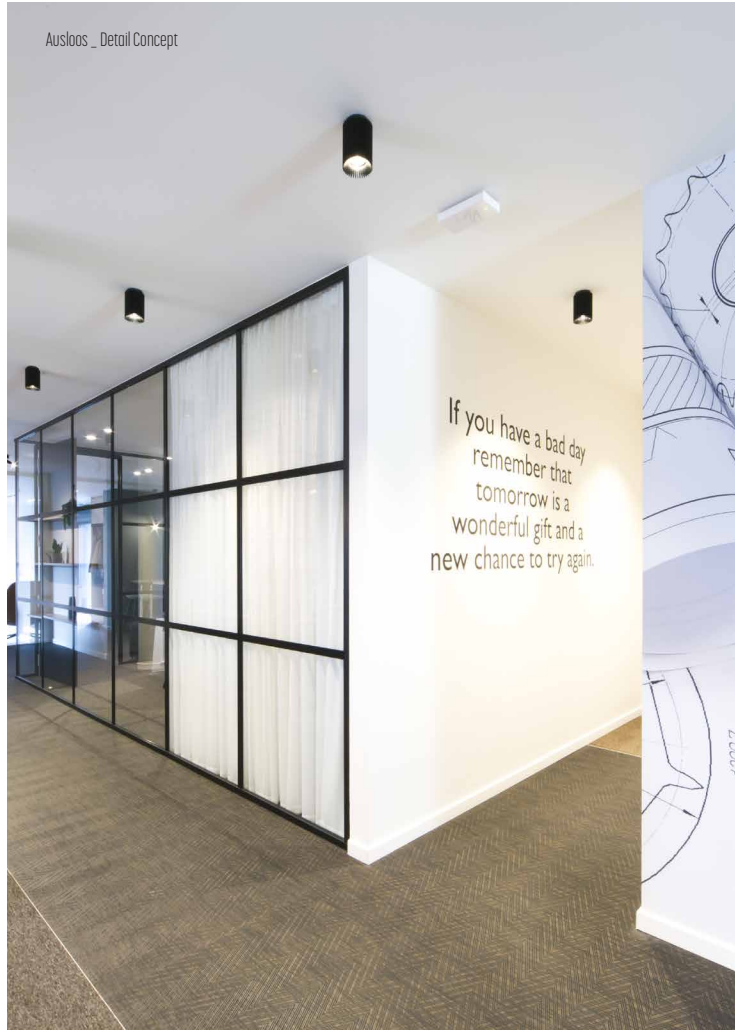






Louis Culot _ Klokhuis

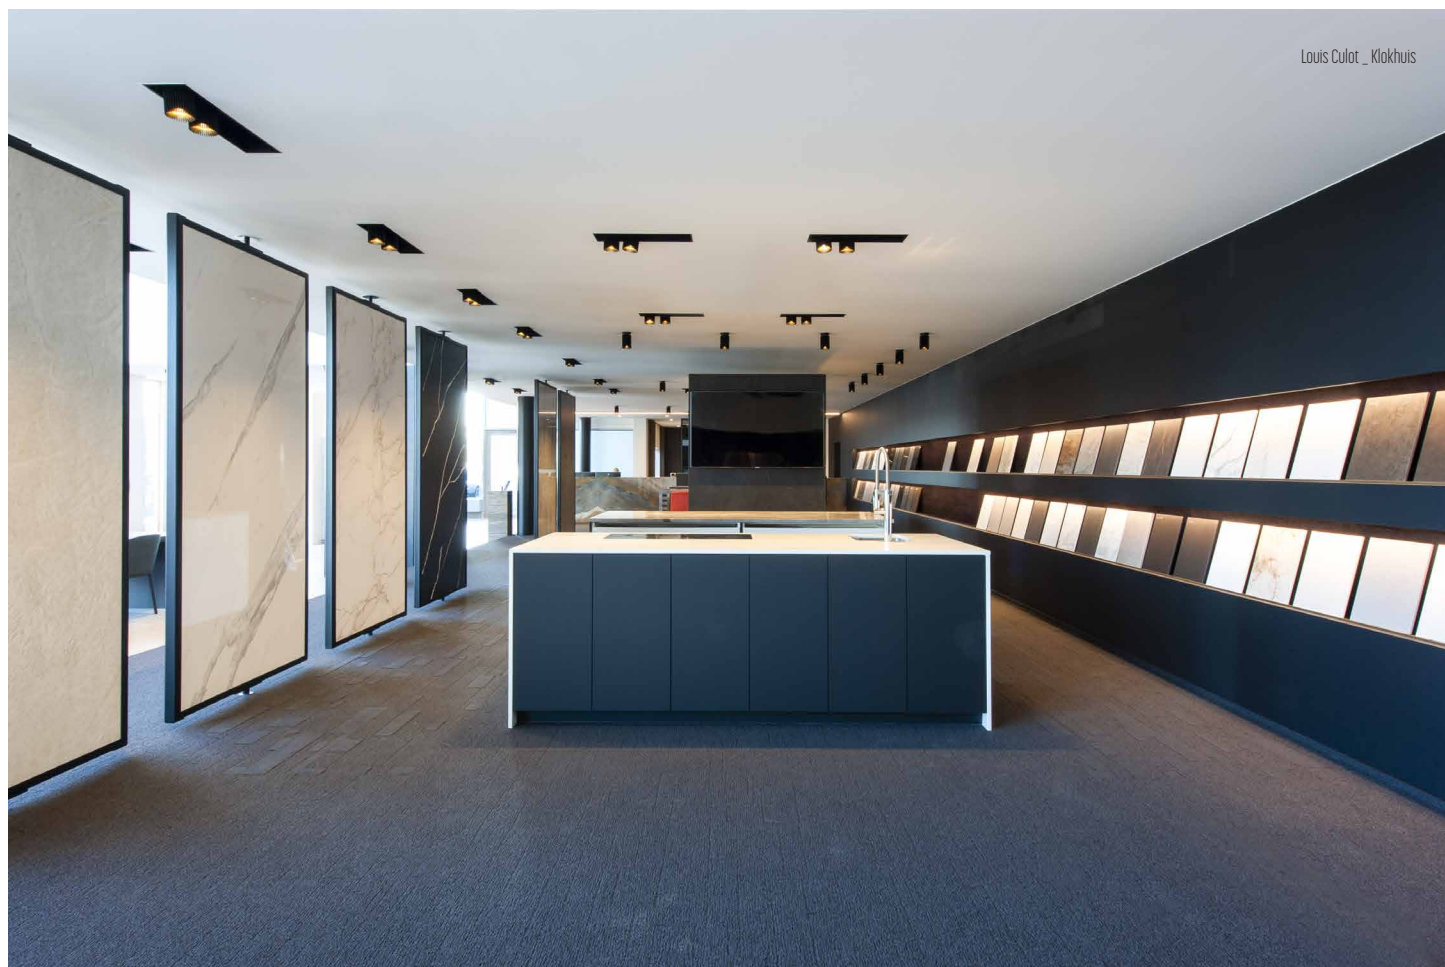



COOLFIN S

834-BB-065-DD-(I)
834-BB(B)-EFFGGH-DD-(I)-K



92


COOLFIN S2

825-BB-065-DD-(I)
825-BB(B)-EFFGGH-DD-(I)-K



COOLFIN 3P

992-BB-065-DD-(I)
992-BB(B)-EFFGGH-DD-(I)-K

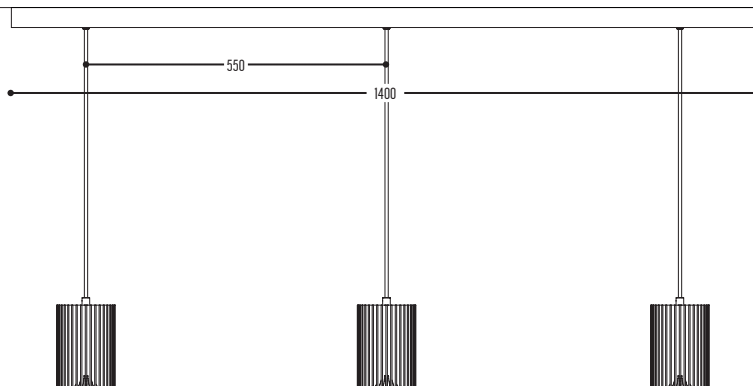

BB(B)	COLORS	02		Black			
		03		White			
					RAL color on request		
CCC	TYPE		065		GU10	LED QPAR20 (MAX 50 W)	
					GU10	LED (MAX 7,5 W)	
EFF	CRI • LUMENOUTPUT	910	>90 CRI • 1100 Lm / 250 mA / 8,3 W				
		915	>90 CRI • 1500 Lm / 350 mA / 11,6 W				
		920	>90 CRI • 2100 Lm / 500 mA / 17 W				
GG	REFLECTOR	40	40°				
		60	60°				
		2	2700K				
H	COLOR TEMP.	3	3000K				
		4	4000K				
		DD	SUSP. CABLE	01	1,5 m		
02	2,5 m						
I	INSIDE COLOR (optional)	G		Gold			
K	DRIVER	1	No driver				
		0	Non dimmable (intern)				
		2	Dimmable 1-10 V (intern) except				
		3	Dali (intern)			COOLFIN S2 (extern)	
		4	Phase cut (intern)				






COOLFIN

830-BB-065-00-(I)
830-BB-EFFGGH-00-(I)-K


COOLFIN MOVE

829-BB-065-00-(I)
829-BB-EFFGGH-00-(I)-K




COOLFIN SET2

833-BB-065-00-(I)
833-BB-EFFGGH-00-(I)-K

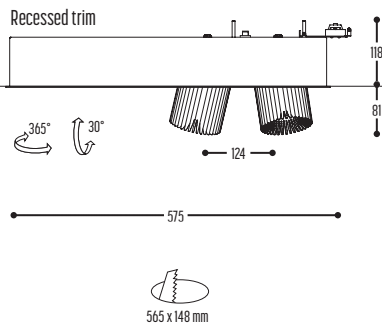

COOLFIN BOX2

826-BB-065-00-(I)
826-BB-EFFGGH-00-(I)-K




BB(B)	COLORS	02		Black	
		03		White	
CCC	TYPE	230 V	065		GU10 LED QPAR20 (MAX 50 W)
					GU10 LED (MAX 7,5 W)
EFF	CRI • LUMENOUTPUT	910	>90 CRI • 1100 Lm / 250 mA / 8,3 W		
		915	>90 CRI • 1500 Lm / 350 mA / 11,6 W		
		920	>90 CRI • 2100 Lm / 500 mA / 17 W		
GG	REFLECTOR	40	40°		
		60	60°		
H	COLOR TEMP.	2	2700K		
		3	3000K		
		4	4000K		
I	INSIDE COLOR (optional)	G		Gold	
K	DRIVER	1	No driver		
		0	Non dimmable (extern)		
		2	Dimmable 1-10 V (extern)		
		3	Dali (extern)		
		4	Phase cut (extern)		
			except for COOLFIN BOX2 (intern)		







COOLFIN TRACK

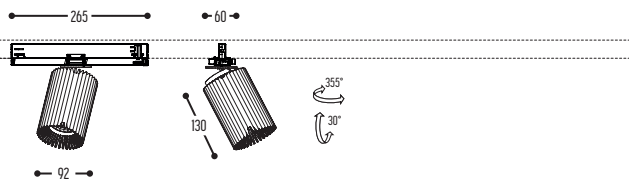827-BB-EFFGGH-00-(I)-K



TRACK RAIL: to be ordered separately - check compatibility
 Non dim. compatible with Eutrac / Global / Powergear
 Dim. compatible with Global / Powergear



BB(B)	COLORS	02		Black
		03		White
EFF	CRI • LUMENOUTPUT	910	>90 CRI • 1100 Lm / 250 mA / 8,3 W	
		915	>90 CRI • 1500 Lm / 350 mA / 11,6 W	
		920	>90 CRI • 2100 Lm / 500 mA / 17 W	
GG	REFLECTOR	40	40°	
		60	60°	
		2	2700K	
H	COLOR TEMP.	3	3000K	
		4	4000K	
		I	INSIDE COLOR (optional)	G
K	DRIVER	0	Non dimmable (intern)	
		3	Dali (intern)	




COOLFIN JR



design made for dark



COOLFIN JR S
844-02-907GGH-DD-(I)-K

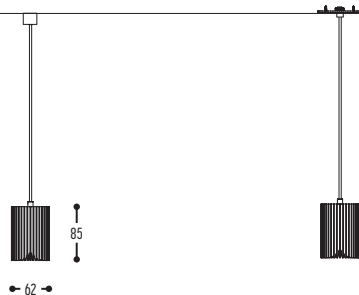COOLFIN JR S2
842-02-907GGH-DD-(I)-K




BB	COLORS	02	 Black	
EFF	CRI • LUMENOUTPUT	907	>90 CRI • 740 Lm / 350 mA / 9,6 W	
GG	REFLECTOR	30	30°	
		40	40°	
		54	54°	
H	COLOR TEMP.	2	2700K	
		3	3000K	
DD	SUSP. CABLE	01	1,5 m	
		02	2,5 m	
I	INSIDE COLOR (optional)	G	 Gold	
K	DRIVER	1	No driver	Except COOLFIN JR S2 (extern)
		0	Non dimmable (intern)	
		2	Dimmable 1-10 V (intern)	
		3	Dali (intern)	
		4	Phase cut (intern)	




COOLFIN JR

840-02-907GGH-00-(I)-K




COOLFIN JR BOX 1

1386-02-907GGH-00-(I)-K




COOLFIN JR SET 1

1385-02-907GGH-00-(I)-K



COOLFIN JR BOX 2

843-02-907GGH-00-(I)-K

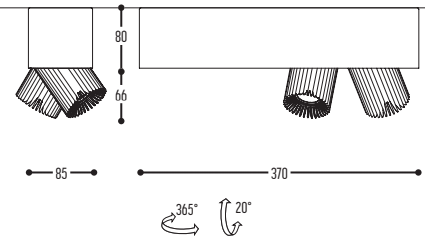


BB	COLORS	02	Black
EFF	CRI • LUMENOUTPUT	907	>90 CRI • 740 Lm / 350 mA / 9,6 W
GG	REFLECTOR	30	30°
		40	40°
		54	54°
H	COLOR TEMP.	2	2700K
		3	3000K
I	INSIDE COLOR (optional)	G	Gold
K	DRIVER	1	No driver
		0	Non dimmable (extern) coolfin jr box1 (intern) • box2 (intern)
		2	Dimmable 1-10 V (extern) coolfin jr box2 (intern)
		3	Dali (extern)
		4	Phase cut (extern) coolfin jr box1 (intern) • box2 (intern)


Alu-Metal



CUP CAKE

design susanne uerlings for dark



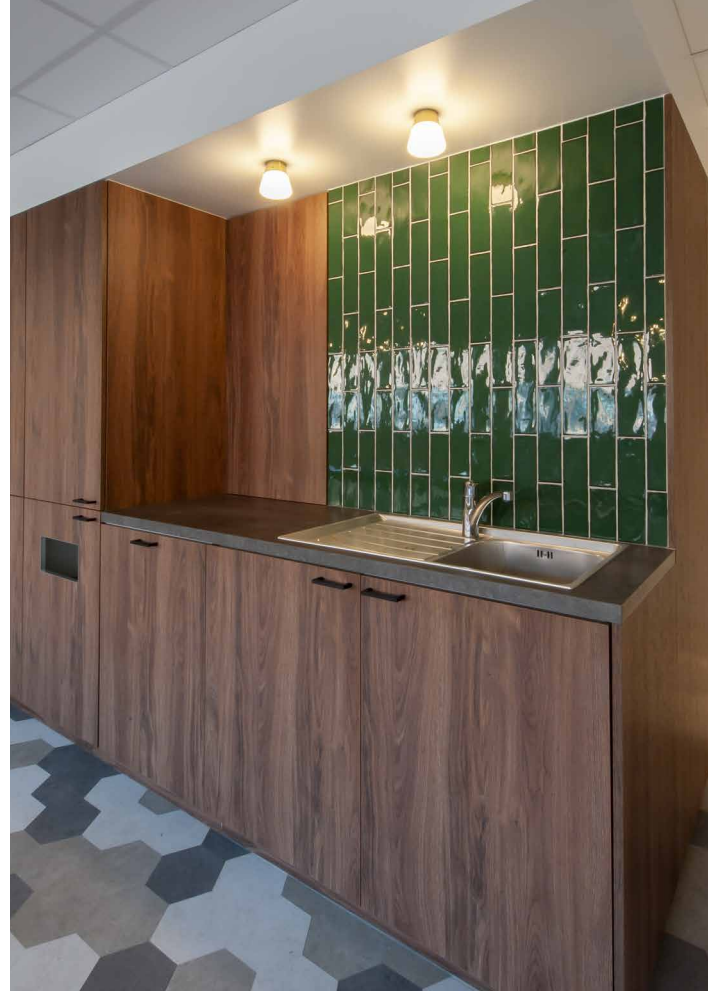







CUP CAKE SUZY S

1065-BB(B)-804002-DD
1065-BB(B)-80600H-DD-K

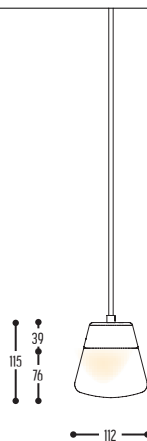


CUP CAKE JENNY S

1066-BB(B)-804002-DD
1066-BB(B)-80600H-DD-K

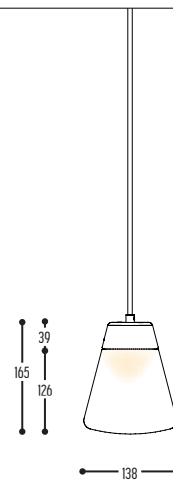


CUP CAKE KATHY S

1067-BB(B)-804002-DD
1067-BB(B)-80600H-DD-K

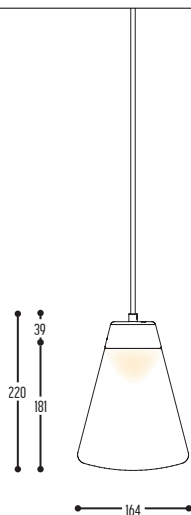


CUP CAKE CLUB 3

1070-BB(B)-804002-DD
1070-BB(B)-80600H-DD-K

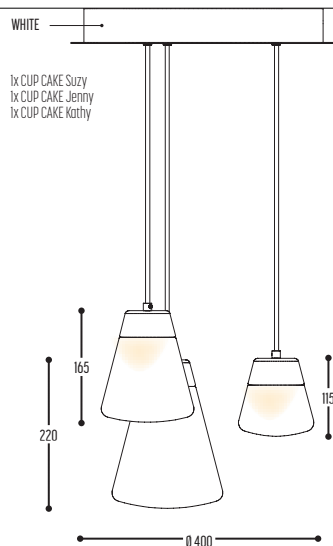

CUP CAKE CLUB 5

1071-BB(B)-804002-DD
1071-BB(B)-80600H-DD-K

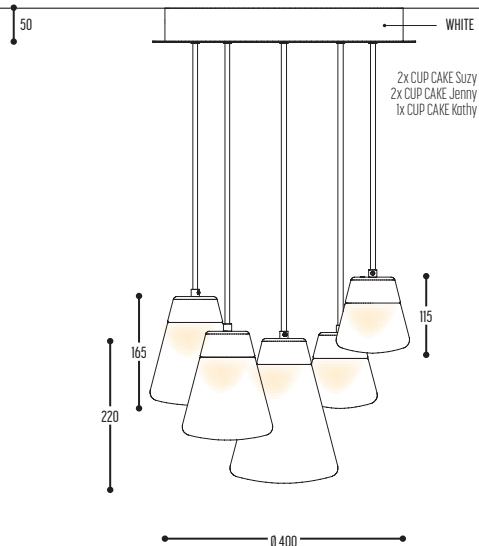


BB(B)	COLORS	02		Black
		03		White
		110		Brass
		RAL color on request		
EFF	CRI • LUMENOUTPUT	804		>80 CRI • 400 Lm / 6W
		806		>80 CRI • 600 Lm / 350mA / 6,4W
GG	REFLECTOR	00	N.A.	
H	COLOR TEMP.	2	2700K	
		3	3000K	
DD	SUSP. CABLE	01	1,5 m	
		02	2,5 m	
K	DRIVER	1	No driver	
		0	Non dimmable (intern)	
		2	Dimmable 1-10 V (intern)	
		3	Dali (intern)	
		4	Phase cut (intern)	

Glass-Alu




CUP CAKE SUZY

1060-BB(B)-804002-00
1060-BB(B)-80600H-00-K




CUP CAKE JENNY







1061-BB(B)-804002-00
1061-BB(B)-80600H-00-K



CUP CAKE KATHY

1062-BB(B)-804002-00
1062-BB(B)-80600H-00-K



BB	COLORS	02		Black
		03		White
		110		Brass
				RAL color on request
EFF	CRI • LUMENOUTPUT	804		>80 CRI • 400 Lm / 6W
		806		>80 CRI • 600 Lm / 350mA / 6,4W
GG	REFLECTOR	00		N.A.
H	COLOR TEMP.	2		2700K
		3		3000K
K	DRIVER	1		No driver
		0		Non dimmable (extern)
		2		Dimmable 1-10 V (extern)
		3		Dali (extern)
		4		Phase cut (extern)


Glass-Alu







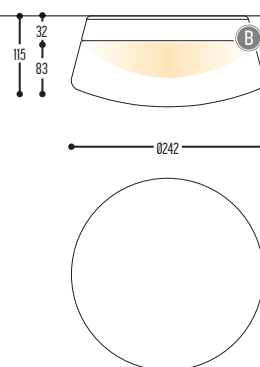


CUP CAKE LUCY

1072-BB(B)-804003-00-(I)-0
1072-BB(B)-804003-00-K



 MOTION DETECTION
optional

BB	COLORS	02		Black
		03		White
		110		Brass
		 RAL color on request		
EFF	CRI • LUMENOUTPUT	804		>80 CRI • 1350 Lm / 15W
GG	REFLECTOR	00	N.A.	
H	COLOR TEMP.	3	3000K	
(I)	MOTION DETECTION optional	1	Only incl. - Non dimmable	
K	DRIVER	1	No driver	
		2	Dimmable 1-10 V (extern)	
		3	Dali (extern)	

Glass-Alu



DANDY

design anthony boelaert for dark






Van der Valk Hotel _ Anthony Boelaert






DANDY M

2171-BB(B)-001-DD

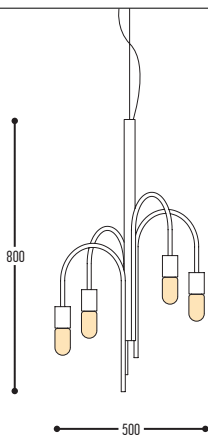


DANDY L



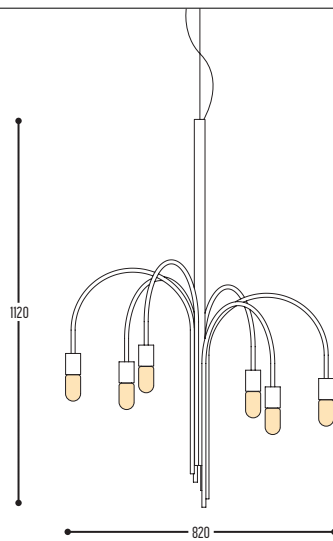

2172-BB(B)-001-DD

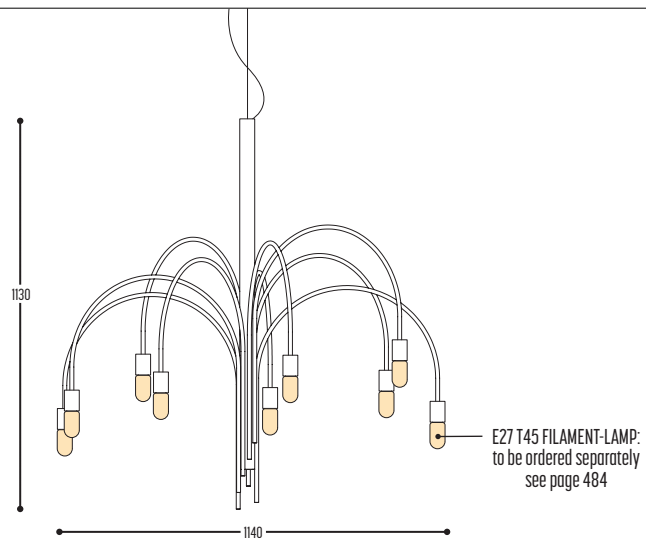

DANDY XL

2173-BB(B)-001-DD



BB	COLORS	02		Black
		T12		Gold Finish
				RAL color on request
CCC	TYPE E27	001		LED T45 Globe (MAX 10W)
DD	SUSP. CABLE	01	1,5 m	
		02	2,5 m	






Alu



D-FAMILY

D-CONCRETE / D-COW / D-LEATHER / D-RABBIT

design ivan missinne for dark

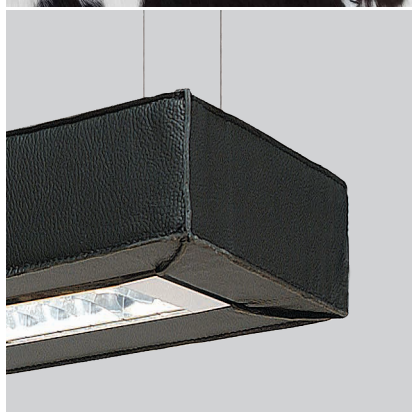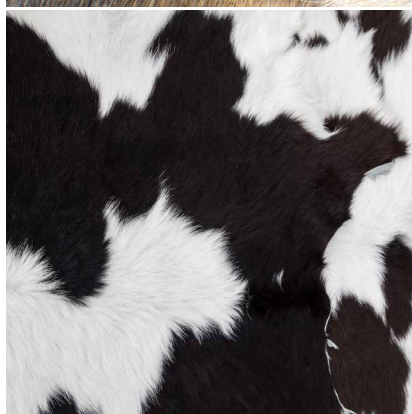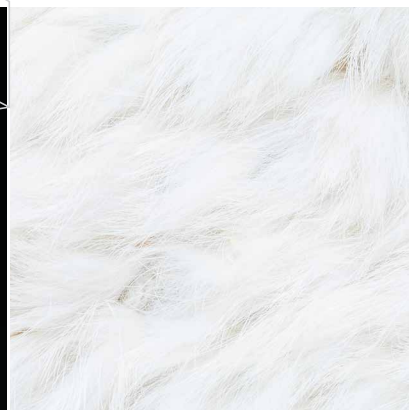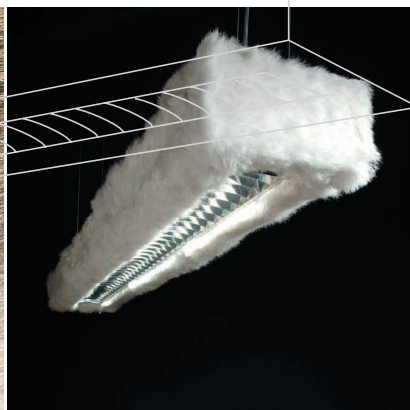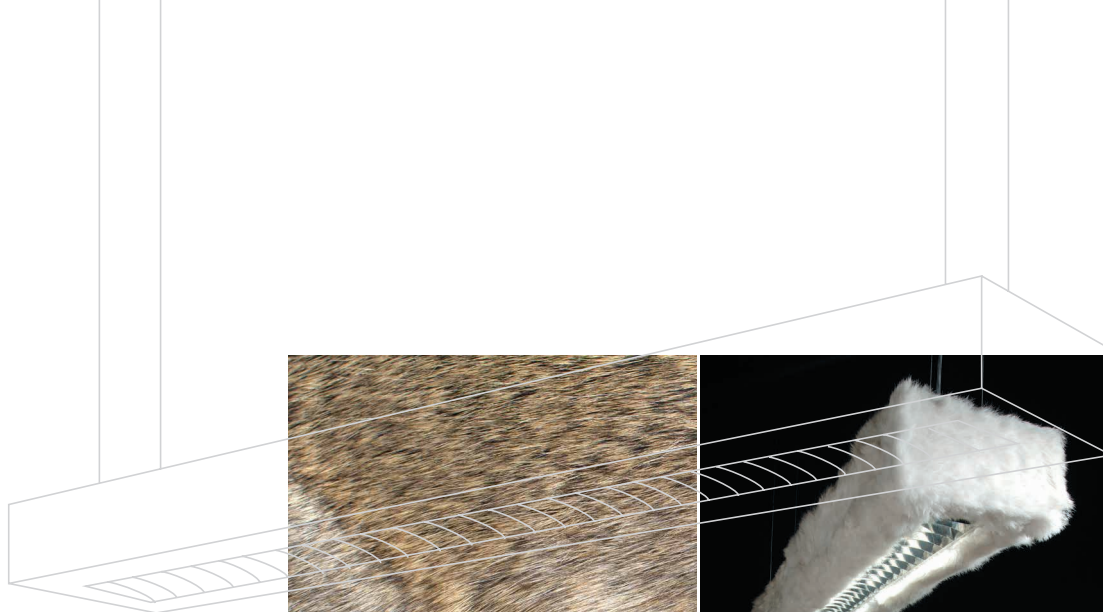

W concentrate




















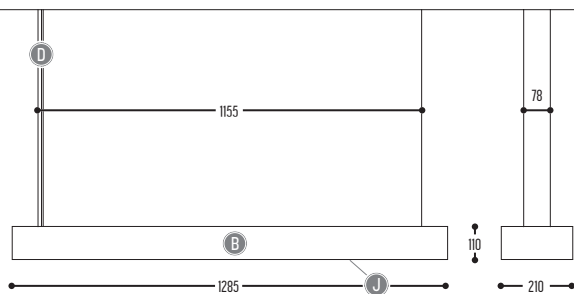

D-FAMILY

110-BB-8663-K-DD-0-J



BB	MATERIAL	40	 Cow
		42	 Leather Black
		43	 Concrete
		44	 Rabbit White
		45	 Rabbit Brown
		46	 Rabbit Black

EFF	CRI • LUMENOUTPUT	866	>90 CRI • 3910 Lm / 25,9 W
H	COLOR TEMP.	3	3000K

K	DRIVER	0	Non dimmable (intern)
		2	Dimmable 1-10 V (intern)
		3	Dali (intern)

DD	SUSP. CABLE	01	1,5 m
		02	2,5 m

J	DIFFUSER	1	Opal
		2	Prismatic



D2V2

design danny venlet for dark



Designpreis der
Bundesrepublik
Deutschland

Nominiert 2004




reddot design award
winner 2003







D2V2

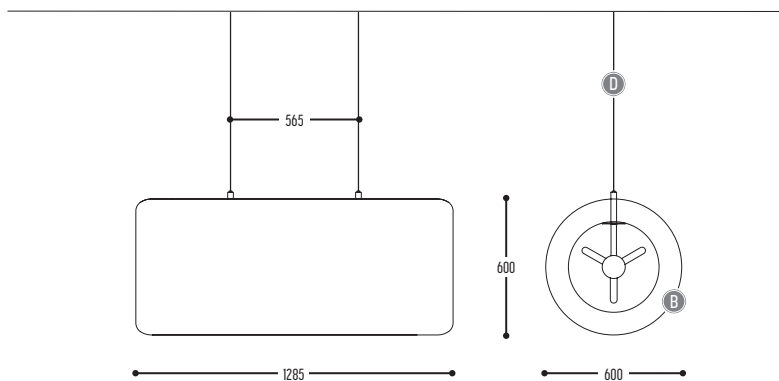160-03-CCC-DD
160-03-EFF(H)-DD-K

BB	MATERIAL	03	White (translucent)
CCC	TYPE G5	354	T16 (54 W) Non Dim
		355	T16 (54 W) Dim 1-10 V
		356	T16 (54 W) ONE 4 ALL
EFF	CRI • LUMENOUTPUT	510	>80 CRI • 24V / 175 W
H	COLOR TEMP.	3	3000 K
DD	SUSP. CABLE	02	2,5 m
		03	5 m
K	DRIVER	0	Non dimmable (intern)
		2	Dimmable 1-10 V (intern)
		3	Dali (intern)

BB	MATERIAL	03	White (translucent)
EFF	CRI • LUMENOUTPUT	500	RGB
		505	RGBW
DD	SUSP. CABLE	02	2,5 m
		03	5 m
K	DRIVER	0	Standalone + remote control
		3	Dali (intern)
		9	DMX (intern)

PE-Metal



DING

design nuuv for dark












DING
851-BB(B)-071-00
851-BB(B)-80500H-00-K

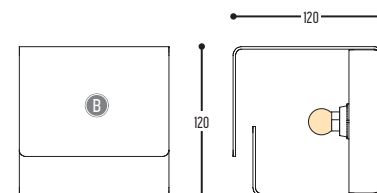

BB(B)	COLORS	02		Black	
		03		White	
		101		Soft Pink	
		103		Soft Blue	
		104		Soft Green	
		124		Kaki	
		140		Old Pink	
		141		Terracotta Red	
		142		Oxide Red	
		111		Brass Finish	
		112		Gold Finish	
		137		Bronze Finish	
					RAL color on request
		CCC	TYPE G9	071	
EFF	CRI • LUMENOUTPUT	805	>80 CRI • 1x 400 Lm / 700 mA / 4 W		
GG	REFLECTOR	00	N.A.		
H	COLOR TEMP.	2	2700K		
		3	3000K		
		4	4000K		
K	DRIVER	1	No driver		
		0	Non dimmable (intern)		

Metal-Alu



DROPZ

design alex de witte for dark











DROPZ

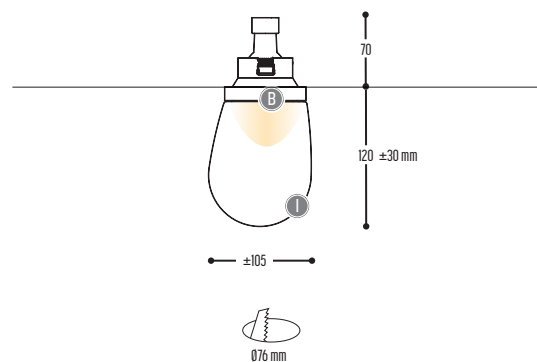1200-BB(B)-065-00-II
1200-BB(B)-90700H-00-K-II



BB(B)	COLORS	02		Black
		03		White
		112		Gold Finish





CCC	TYPE GUID	065		OPARSI (MAX 50 W)
-----	-----------	-----	---------------------------------------------------------------------------------------	-------------------

EFF	CRI • LUMENOUTPUT	907	>90 CRI • 780 Lm / 250 mA / 8,7 W
-----	-------------------	-----	-----------------------------------

GG	REFLECTOR	00	N.A.
----	-----------	----	------

H	COLOR TEMP.	2	2700 K
		3	3000 K

K	DRIVER	1	No driver
		0	Non dimmable (extern)
		2	Dimmable 1-10 V (extern)
		3	Dali (extern)
		4	Phase cut (extern)

II	GLOBE color	00		Transparent
		04		Red
		49		Amber
		58		Smoke




EDGAR

design made for dark





DESIGN PLUS
powered by: **light+building**




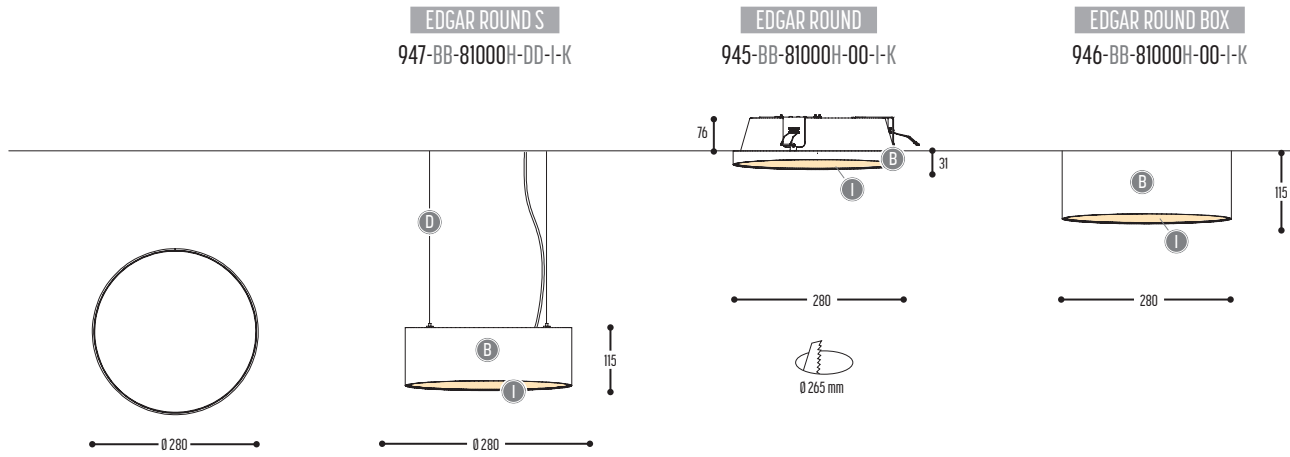

EDGAR SQUARE S
942-BB-80900H-DD-I-K



EDGAR SQUARE
940-BB-80900H-00-I-K



304









EDGAR SQUARE BOX
941-BB-80900H-00-I-K



304



BB	COLORS	02	 Black
		03	 White
			RAL color on request
EFF	CRI • LUMENOUTPUT	809	>80 CRI • 1350 Lm / 350 mA / 11,3 W
		809	>80 CRI • 1550 Lm / 500 mA / 13,8 W
GG	REFLECTOR	00	N.A.
H	COLOR TEMP.	3	3000 K
		4	4000 K
DD	SUSP. CABLE	00	N.A.
		02	1,5m
		03	2,5m
I	INSIDE COLOR	B	 Black
		W	 White
		G	 Gold
K	DRIVER	1	No driver
		0	Non dimmable (intern) except for
		2	Dimmable 1-10 V (intern) EDGAR ROUND / SQUARE
		3	Dali (intern) (extern)

Metal-PC




FOREVER 27

design dark studio for dark







FOREVER 27
1237-BB(B)-001



FOREVER 27 DISK
1243-BB(B)-001-DD-E



FOREVER 27 DISK40
1236-BB(B)-001-DD-E

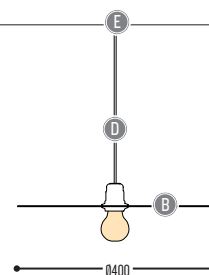

BB(B)	COLORS	02	Black		
		03	White		
		101	Soft Pink		
		103	Soft Blue		
		104	Soft Green		
		124	Kaki		
		140	Old Pink		
		141	Terracotta Red		
		142	Oxide Red		
		110	Brass		
		137	Bronze Finish		
		RAL color on request			
		CCC	TYPE E27	001	LED (MAX 8 W)
		DD	SUSP. CABLE	01	1,5 m
02	2,5 m				
EE	SUSP. KIT	B	Black		
		W	White		


Alu - Brass



GASTON


design carl hagerling for dark



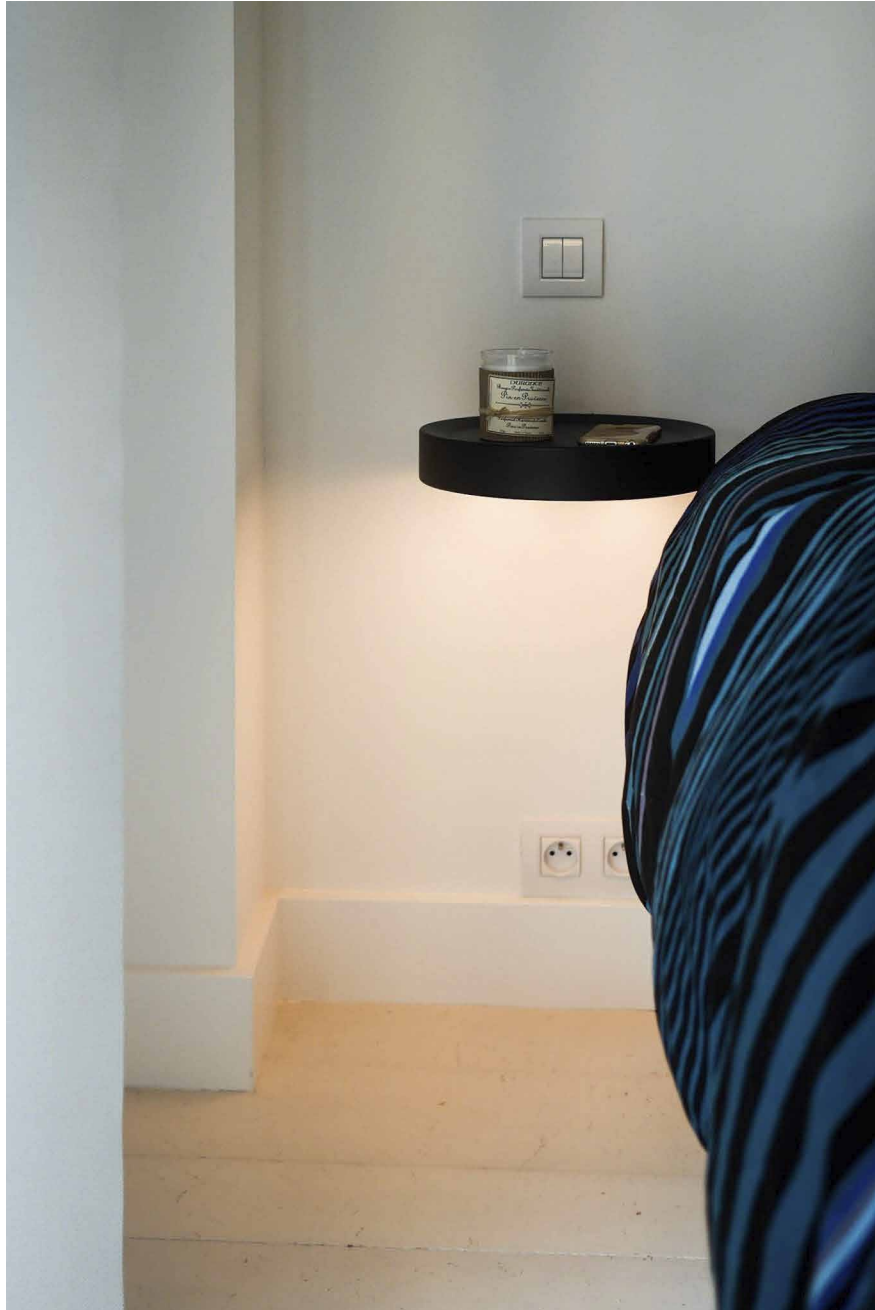




GASTON
950-BB(B)-150000-WW

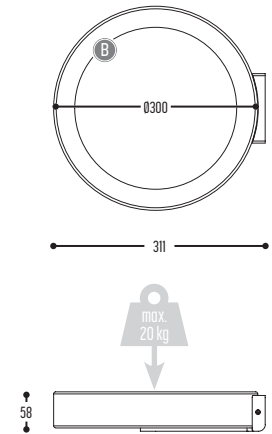

BB(B)	COLORS	02	Black
		03	White
		101	Soft Pink
		103	Soft Blue
		104	Soft Green
		124	Kaki
		140	Old Pink
		141	Terracotta Red
		142	Oxide Red
		111	Brass Finish
		112	Gold Finish
		137	Bronze Finish
		 RAL color on request	
		CCCCC	TYPE
HH	COLOR TEMPERATURE	WW	Warm White 2700 K

Metal-PC



GAZTA


design vincent van laere for dark





GAZTA 50S

3020-BB(B)-001-DD
3020-BB(B)-90600H-DD-K

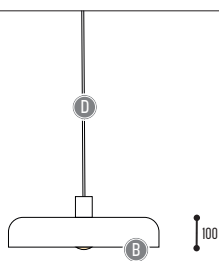


0500

E27 FILAMENT-LAMP:
to be ordered separately

GAZTA 90S

3021-BB(B)-001-DD
3021-BB(B)-90600H-DD-K

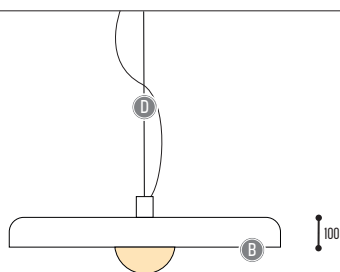

0900

E27 FILAMENT-LAMP:
to be ordered separately

BB(B)	COLORS	02		Black
		03		White
		101		Soft Pink
		103		Soft Blue
		104		Soft Green
		124		Kaki
		140		Old Pink
		141		Terracotta Red
		142		Oxide Red
		112		Gold Finish
		137		Bronze Finish
021		Black/Gold		
			RAL color on request	
CCC	TYPE E27	001		LED Globe (MAX.10W)
EFF	CRI • LUMENOUTPUT	906	>90 CRI • 600 Lm / 350 mA / 6 W	
GG	REFLECTOR	00	N.A.	
H	COLOR TEMP.	2	2700K	
		3	3000K	
DD	SUSP. CABLE	01	1,5 m	
		02	2,5 m	
K	DRIVER	1	No driver	
		0	Non dimmable (intern)	
		2	Dimmable 1-10 V (intern)	
		3	Dali (intern)	
		4	Phase cut (intern)	

Alu-Brass



HIHOPE



design dark studio for dark





HIHOPE TIKI 950



1941-BB-90600D-DD-II(I)-K



950

HIHOPE TIKI 1200


1942-BB-90600D-DD-II(I)-K



1200

HIHOPE TIKI 1500


1943-BB-90600D-DD-II(I)-K




1500

HIHOPE TIKI 1800

1944-BB-90600D-DD-II(I)-K



1800

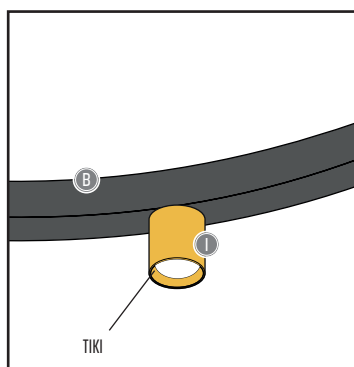




BB	COLOR RING	02	Black
		03	White
		RAL color on request	
EFF	CRI • LUMENOUTPUT	906	>90 CRI • 600 Lm / 350 mA / 6,4 W (per spot)
GG	REFLECTOR	00	N.A.
		H	
H	COLOR TEMP.	2	2700 K
		3	3000 K
DD	SUSP. CABLE	01	1,5 m
		02	2,5 m
		03	5 m
II(I)	COLOR TIKI	02	Black
		03	White
		112	Gold
		RAL color on request	
K	DRIVER	0	Non dimmable (intern)
		2	Dimmable 1-10 V (intern)
		3	Dali (intern)





HIHOPE TUKI

AAAA-BB(B)-DD-M-II-H-(J)-K

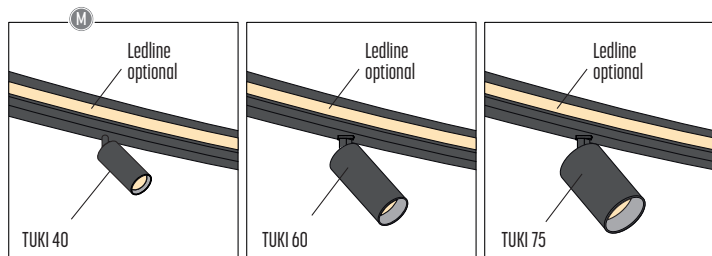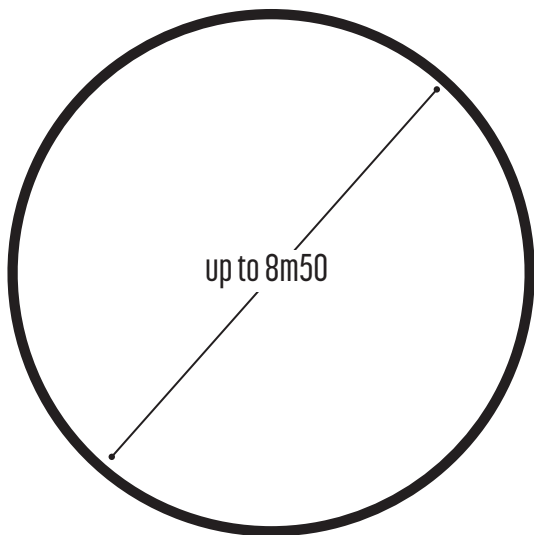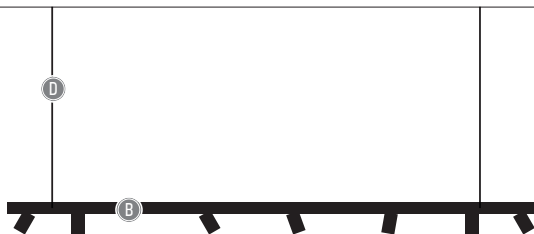

AAAA	MODEL DIAMETER	1931	Ø 8500 mm - 20 spots
		1932	Ø 6000 mm - 15 spots
		1933	Ø 4500 mm - 12 spots
		1934	Ø 3000 mm - 10 spots
		1935	Ø 1800 mm - 7 spots
		1936	Ø 1500 mm - 7 spots
		1937	Ø 1200 mm - 6 spots
BB(B)	COLOR RING	02	Black
		03	White
		112	Gold
		RAL color on request	
DD	SUSP. CABLE	01	1,5 m
		02	2,5 m
		03	5 m
M	SPOT	TUKI 40	1 >90CRI • 600 Lm / 350 mA / 6,4 W / 34° (per spot)
		TUKI 60	2 >90CRI • 895 Lm / 350mA / 15W / 34° (per spot)
		TUKI 75	3 >90CRI • 1825 Lm / 600mA / 24W / 34° (per spot)
		TUKI 75	4 >90CRI • 2700Lm / 900mA / 36W / 34° (per spot)
II	COLOR SPOT	02	Black
		03	White
H	COLOR TEMP.	2	2700 K
		3	3000 K
(J)	INLIGHT (optional)	1	Ledline 14 W / m
K	DRIVER	0	Non dimmable (intern)
		2	Dimmable 1-10 V (intern)
		3	Dali (intern)




HOEK

design jos devriedt for dark





HOEK
790-BB-CC-00-K-0

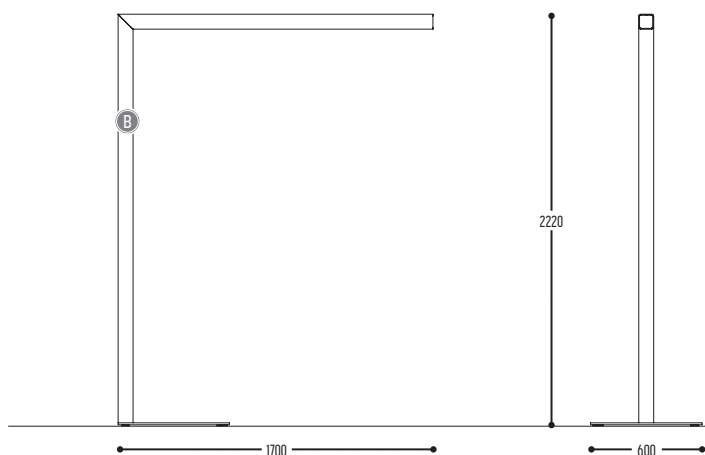


BB	COLORS	02	Black
		03	White
		10	Alu
		RAL color on request	
CC	CRI • LUMENOUTPUT	13	>90 CRI • 4900 Lm / 32,4 W / 3000 K
K	DRIVER	0	Non dimmable (intern)
		3	Dali (intern)
		10	Sensor ready
J	DIFFUSER	0	Opal



IJ-LAMP


design jacob de baan for dark

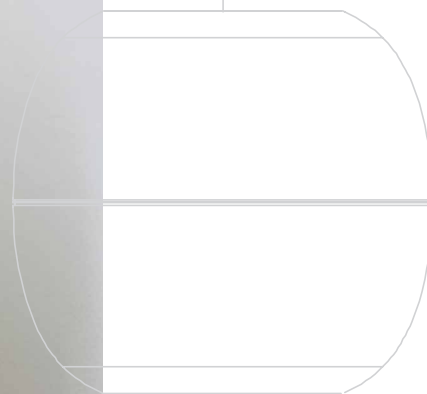


DOEN | MATERIAALPRIJS '11
VOOR DUURZAAM EN INNOVATIEF MATERIAALGEBRUIK






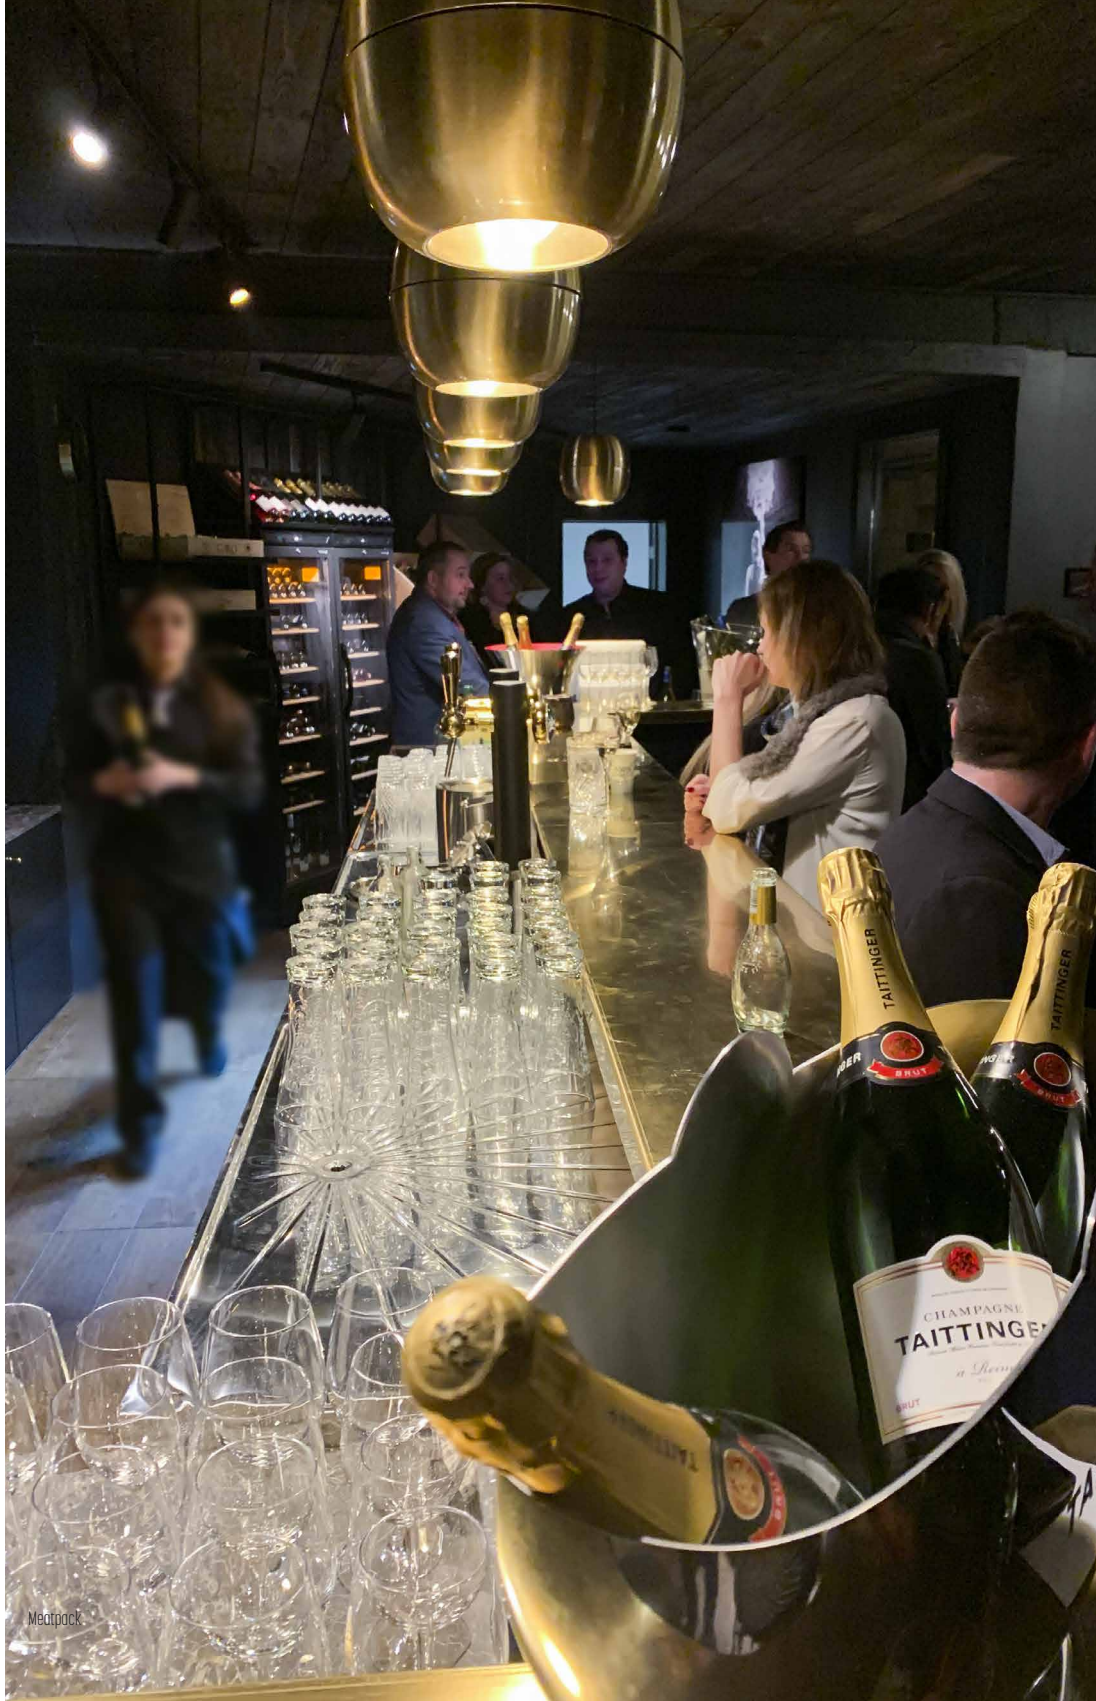

IJ-LAMP METAL S
815-BB(B)-042-DD



IJ-LAMP METAL WALL
817-BB(B)-042-00



BB(B)	COLORS	02		Black
		03		White
		101		Soft Pink
		103		Soft Blue
		104		Soft Green
		124		Kaki
		140		Old Pink
		141		Terracotta Red
		142		Oxide Red
		69		Copper
		110		Brass
		137		Bronze Finish
CCC	TYPE E27	042		LED Globe (MAX 12W)
DD	SUSP. CABLE	01	1,5 m	
		02	2,5 m	

Alu-Metal-Brass




KAVEOO

design dark studio for dark






KAVEOO
1375-BB-90600H-I-K



KAVEOO MAX
1376-BB-91500H-I-K



BB(B)	COLORS	02		Black
		03		White
		112		Gold Finish
EFF	TYPE	KAVEOO	906	>90 CRI • 2x 600 Lm / 350 mA / 6,4 W
		KAVEOO MAX	915	>80 CRI • 2x 1500 Lm / 350 mA / 11,6 W
GG	REFLECTOR	00	N.A.	
H	COLOR TEMP	2	2700K	
		3	3000K	
		4	4000K	
I	INSIDE COLOR	B		Black
		W		White
		G		Gold
K	DRIVER	1	No driver	
		0	Non dimmable (intern)	
		2	Dimmable 1-10 V (intern)	Except KAVEOO (extern)
		3	Dali (intern)	
		4	Phase cut (intern)	



KITN

design dark studio for dark













KITN 3

2400 mm: 2665-BB-28PH-K
 3000 mm: 2666-BB-28PH-K
 3600 mm: 2667-BB-28PH-K




KITN 4

2400 mm: 2670-BB-28PH-K
 3000 mm: 2671-BB-28PH-K
 3600 mm: 2672-BB-28PH-K

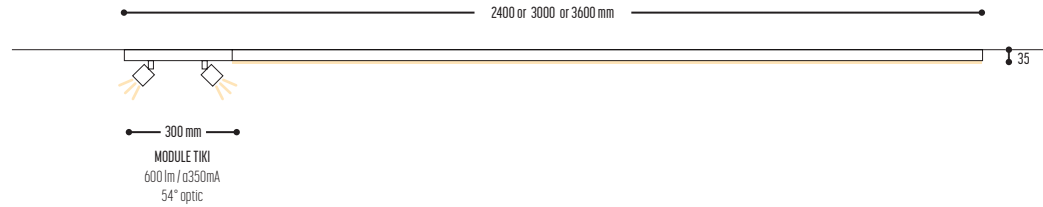


KITN 5

2400 mm: 2675-BB-28PH-K
 3000 mm: 2676-BB-28PH-K
 3600 mm: 2677-BB-28PH-K

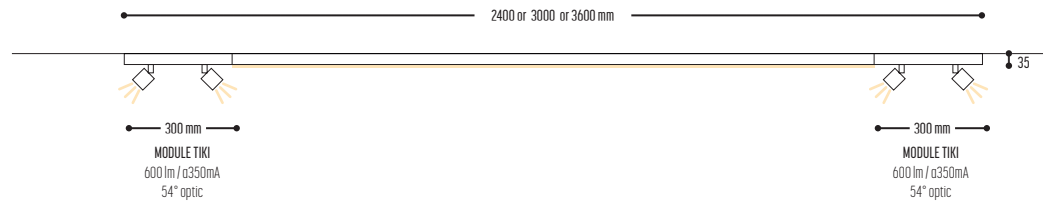

KITN 6


2400 mm: 2680-BB-28PH-K-M
 3000 mm: 2681-BB-28PH-K-M
 3600 mm: 2682-BB-28PH-K-M

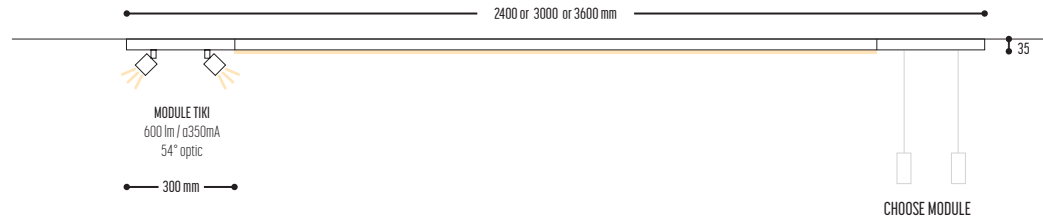

MODULE TUKI	MODULE CIGAR	MODULE FOREVER 27	MODULE BANGSTER HOODY	MODULE SANGHA 30	MODULE SANGHA 40


KITN 1

2400 mm: 2660-BB-K

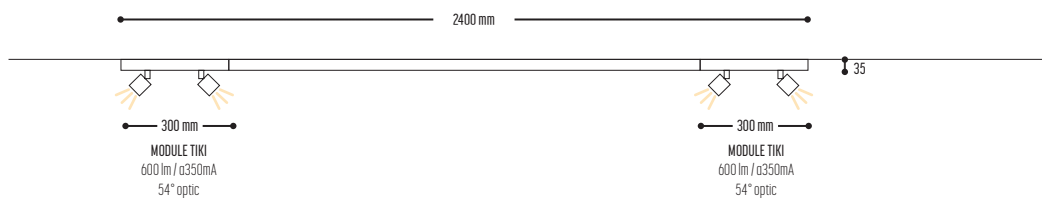

KITN 2

3000 mm: 2661-BB-K

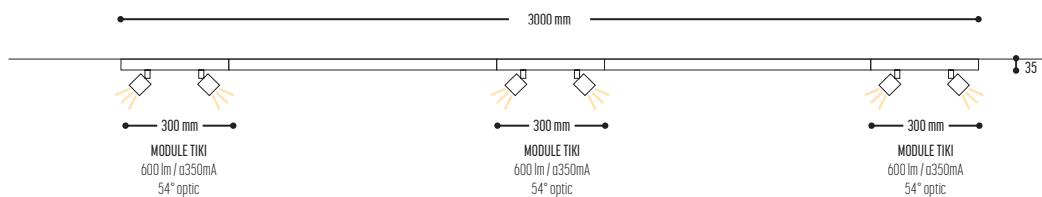

BB	COLORS	02	Black
		03	White
CC	LED	28	>90 CRI • 28,8 W/M / 24 Vdc
G	DIFFUSER	P	Plexi
H	COLOR TEMP	2	2700K
		3	3000K
		4	4000K
K	DRIVER	1	No driver
		0	Non dimmable (extern)
		2	Dimmable 1-10 V (extern)
		3	Dali (extern)
		4	Phase cut (extern)
M	MODULE TUKI	1	2x TUKI 40S Black
	MODULE CIGAR	2	2x CIGAR S Black/ Glass
		3	2x CIGAR S Black / Alabaster
	MODULE FOREVER 27	4	2x FOREVER 27 S Black
	MODULE BANGSTER HOODY	5	2x BANGSTER HOODY Ø200 mm Black
		6	2x BANGSTER HOODY Ø200 mm Brass
	MODULE SANGHA	7	1x SANGHA 30 / Black
		8	1x SANGHA 40 / Black




LA CAGE

design stefan schöning for dark






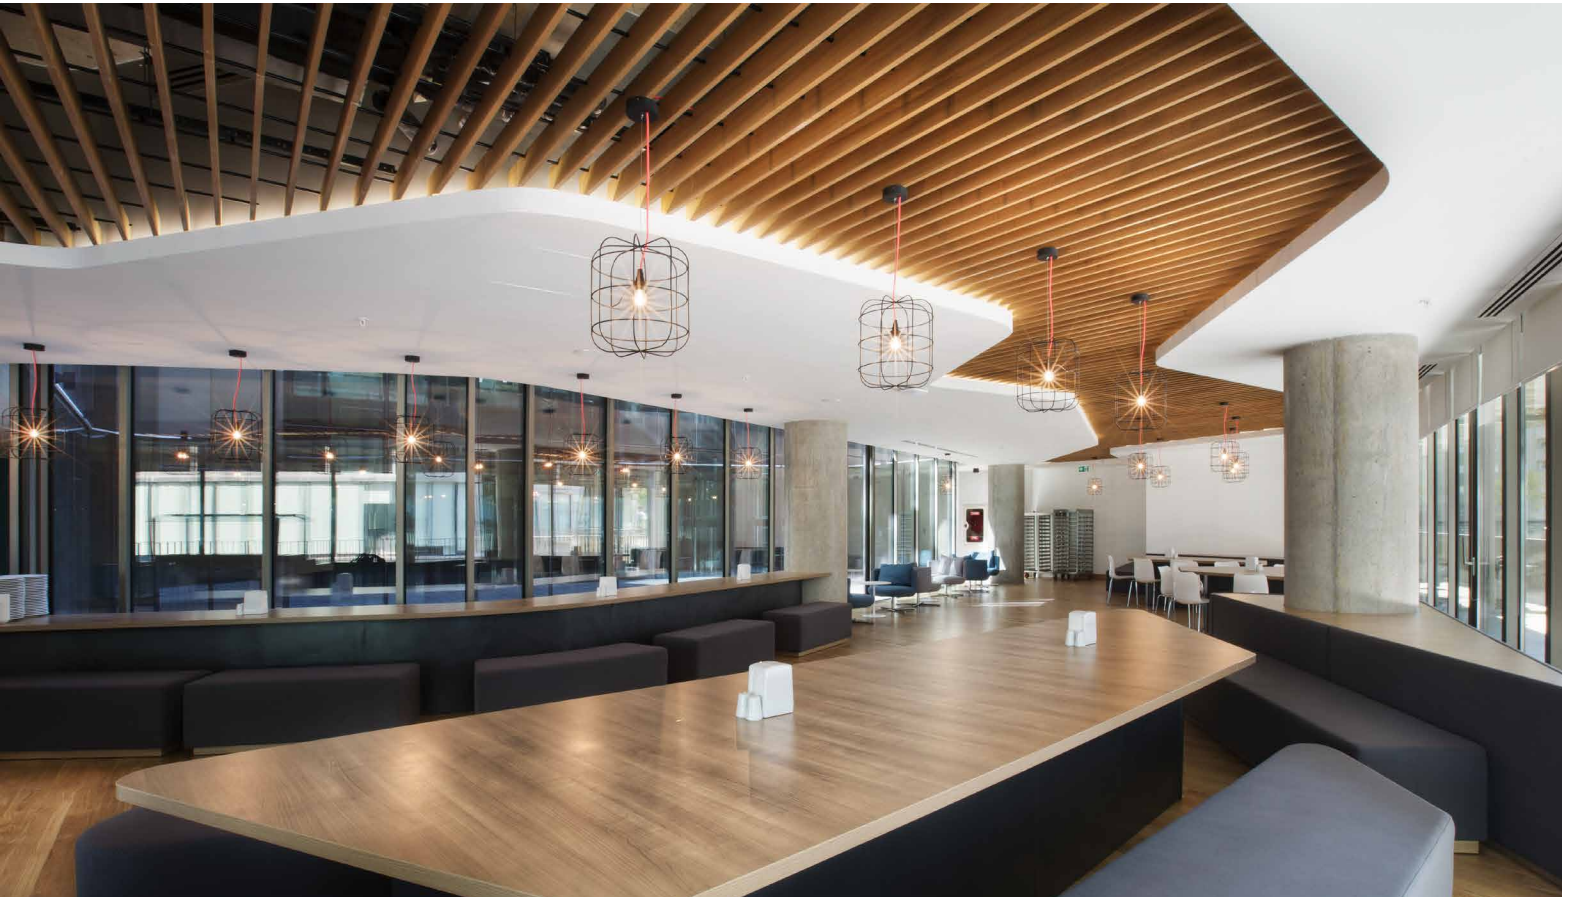





LA CAGE
600-BB(B)-005-DD-EE

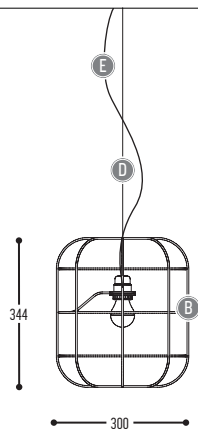

LA CAGE DIVA
602-BB(B)-001-DD-EE

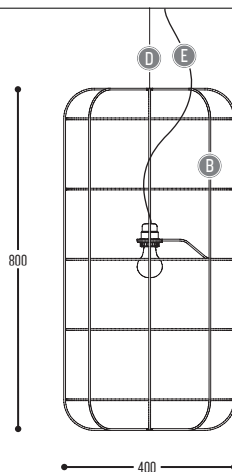

LA CAGE GROSSA
603-BB(B)-001-DD-EE

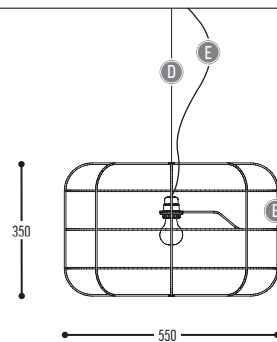

BB(B)	COLORS	02		Black		
		03		White		
		101		Soft Pink		
		103		Soft Blue		
		104		Soft Green		
		124		Kaki		
		140		Old Pink		
		141		Terracotta Red		
		142		Oxide Red		
CCC	TYPE	LA CAGE	005		E14	1x LED (MAX 7W)
		LA CAGE DIVA/GROSSA	001		E27	1x LED (MAX 12W)
DD	SUSP. CABLE	01	1,5 m			
		02	2,5 m			
EE	SUSP. KIT	02		Black		
		03		White		
		04		Pink		



L-HOP

design danny venlet for dark



2017
EUROPEAN
PRODUCT
DESIGN
AWARD


BRONZE WINNER

GOOD
DESIGN






L-HOP 1
1310-BB(B)-300000-WW

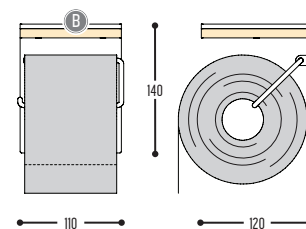

L-HOP 2
1311-BB(B)-300000-WW

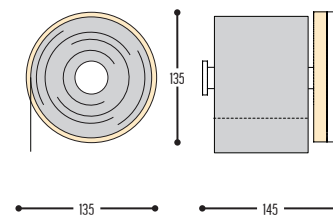

BB(B)	COLORS	02		Black
		03		White
		101		Soft Pink
		103		Soft Blue
		104		Soft Green
		124		Kaki
		140		Old Pink
		141		Terracotta Red
		142		Oxide Red
		112		Gold Finish
		137		Bronze Finish
CCCCC	TYPE	300000	3000 K / 3 W incl. non-dim driver	
HH	COLOR TEMP.	WW	Warm white 3000K	

Alu - PMMA



LGT M


design carl hagerling for dark







LGTM
750-BB-001-DD
750-BB-91500H-DD-K

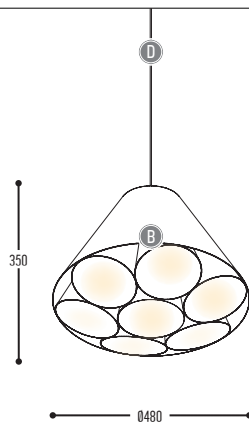

BB(B)	COLORS	02	Black (inside gold)
		03	White (inside gold)
CCC	TYPE E27	001	LED Globe (MAX 11W)
EFF	CRI • LUMENOUTPUT	915	>90 CRI • 1500 Lm / 350 mA / 11,6 W
GG	REFLECTOR	00	N.A.
H	COLOR TEMP.	2	2700K
		3	3000K
		4	4000K
DD	SUSP. CABLE	01	1,5 m
		02	2,5 m
K	DRIVER	1	No driver
		0	Non dimmable (intern)
		2	Dimmable 1-10 V (intern)
		3	Dali (intern)
		4	Phase cut (intern)

Alu




MAGNIFIQUE

design dark studio for dark





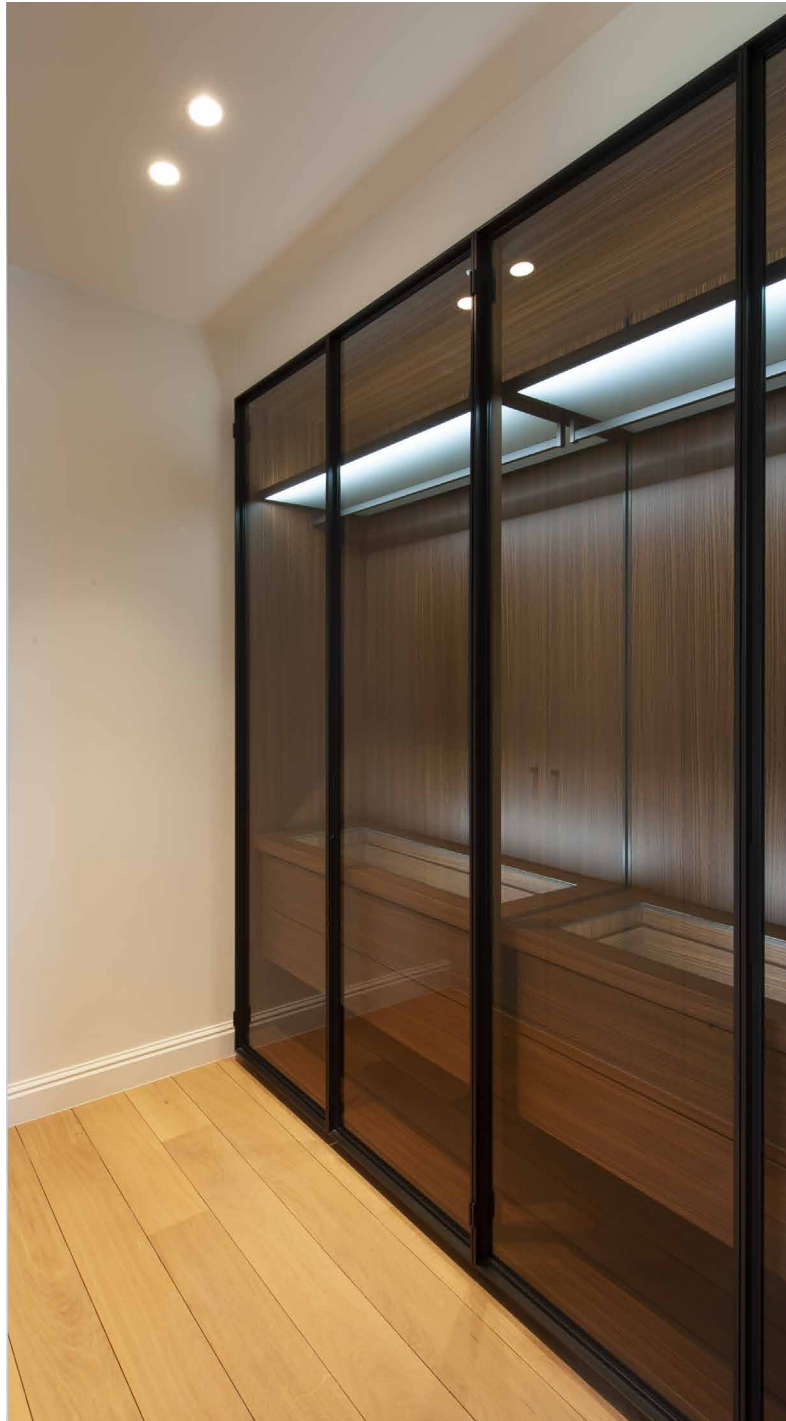






ONE PLUG »
MAGNETIC CLICK »
MULTIPLE SOLUTIONS



ONE PLUG »
MAGNETIC CLICK »
MULTIPLE SOLUTIONS




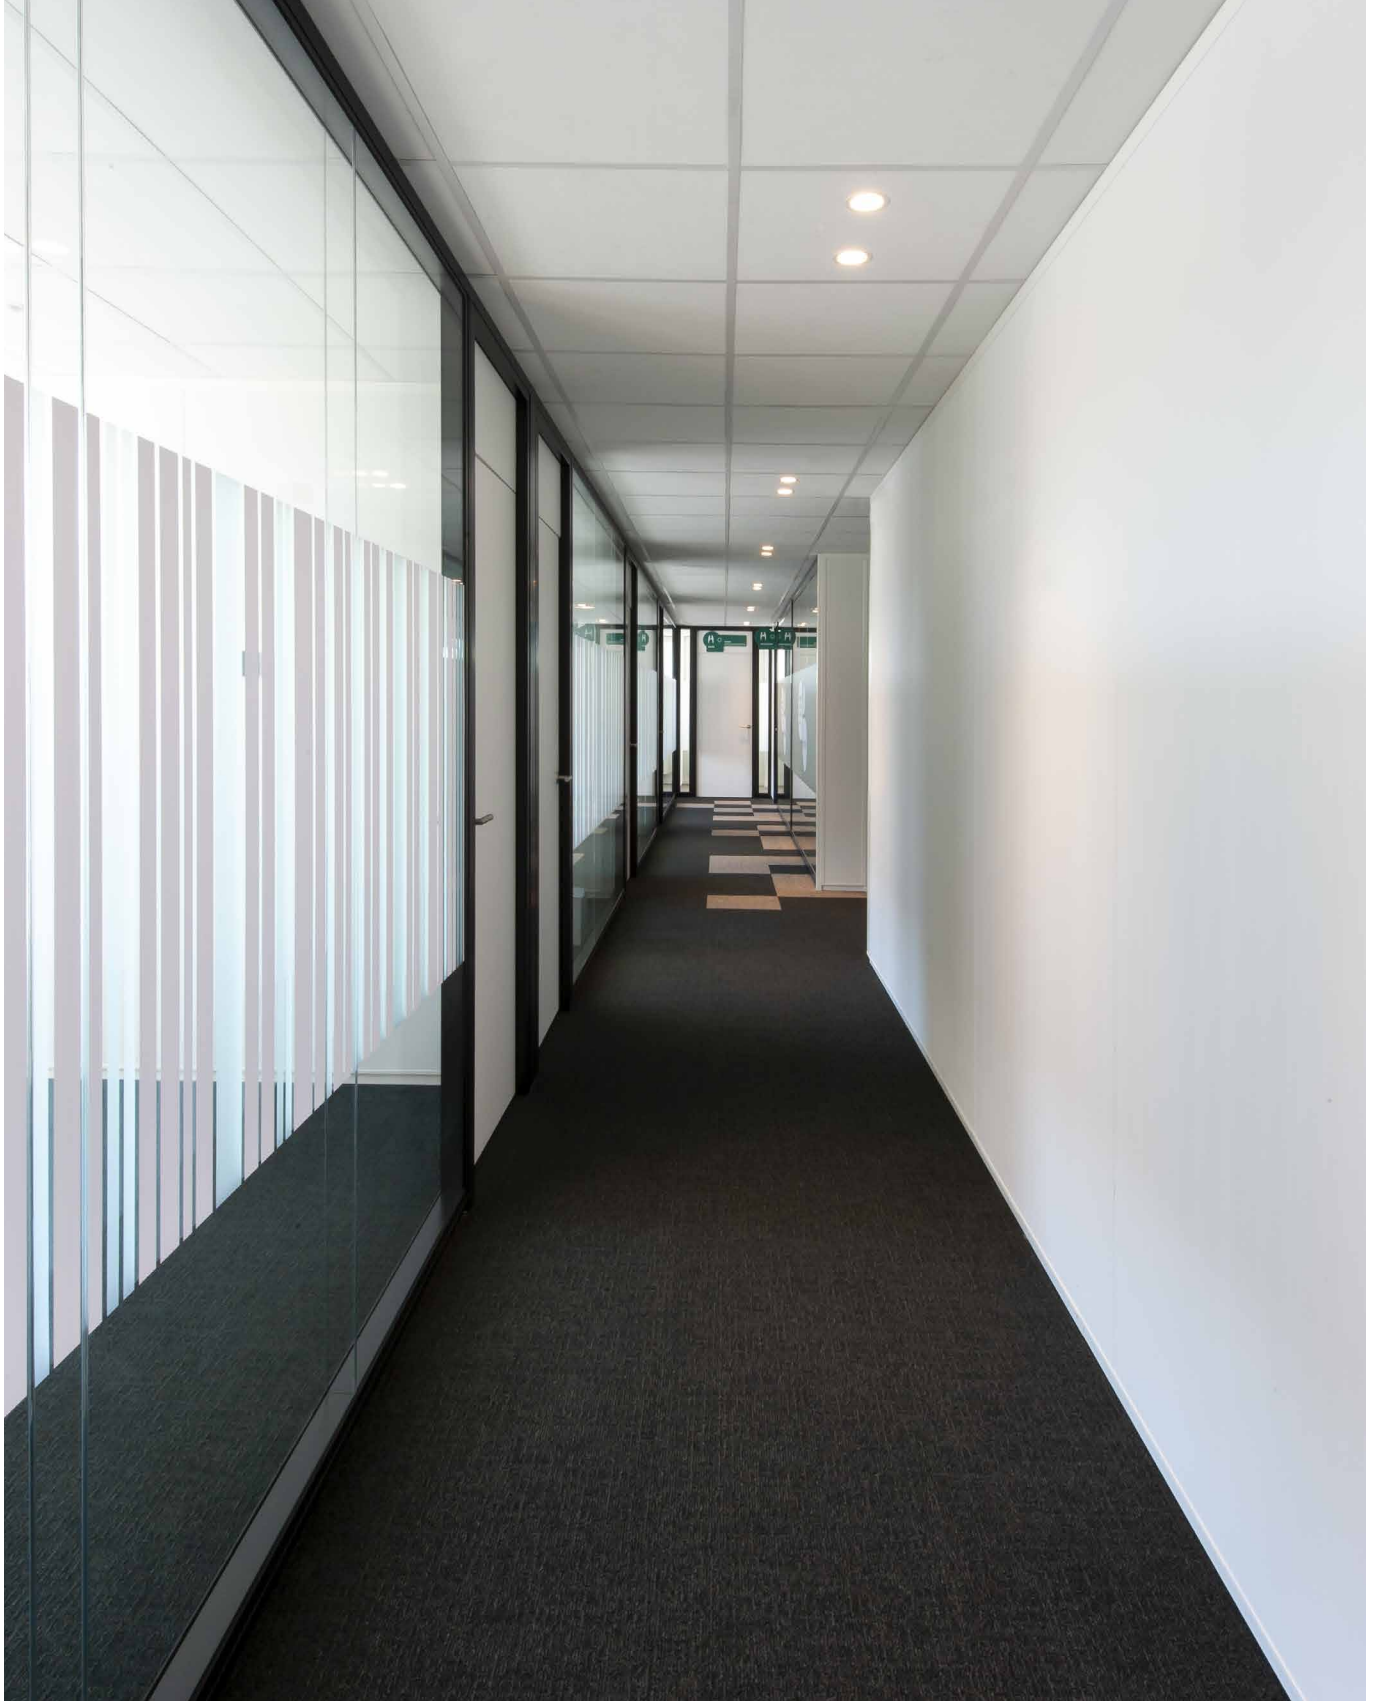

ONE PLUG »
MAGNETIC CLICK »
MULTIPLE SOLUTIONS

PLUG TRIMLESS

3000-00



Ø 80



Ø 86 mm
check assembly doctor
for concrete ceiling



PLUG TRIM black

3000-02



Ø 95




Ø 86 mm



PLUG TRIM white

3000-03



Ø 95




Ø 86 mm







MAGNIFIQUE DEEP
3001-BB(B)-907GGH-K



MAGNIFIQUE MOVE
3002-BB(B)-907GGH-K



MAGNIFIQUE COUCOU
3003-BB-907GGH-K

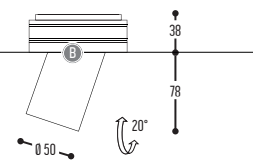


BB(B)	COLORS	02	Black
		03	White
		112	Gold (only for DEEP, MOVE)
EFF	CRI • LUMENOUTPUT	907	>90 CRI • 1x 780 Lm / 250 mA / 8,7 W
GG	REFLECTOR	12	12°
		34	34°
		60	60°
H	COLOR TEMP.	2	2700K
		3	3000K
K	DRIVER	1	No driver
		0	Non dimmable (extern)
		2	Dimmable 1-10 V (extern)
		3	Dali (extern)
		4	Phase cut (extern)

Alu





MAGNIFIQUE KIKI
3007-BB-907GGH-II(I)-K

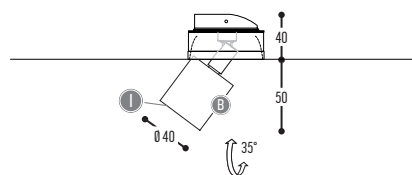

BB(B)	COLORS	02	Black
		03	White
EFF	CRI • LUMENOUTPUT	907	>90 CRI • 1x 600 Lm / 350 mA / 6,4 W
GG	REFLECTOR	22	22°
		34	34°
		54	54°
H	COLOR TEMP.	2	2700K
		3	3000K
II(I)	INSIDE COLOR	02	Black
		03	White
		112	Gold
K	DRIVER	1	No driver
		0	Non dimmable (extern)
		2	Dimmable 1-10 V (extern)
		3	Dali (extern)
		4	Phase cut (extern)

Alu



ONE PLUG




MAGNETIC CLICK



MAGNIFIQUE LOFTR

3005-BB-90747H-01-K

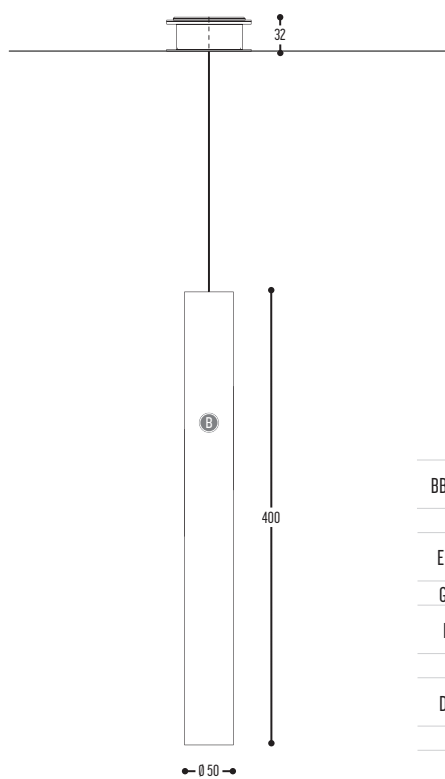

BB(B)	COLORS	02	Black
		03	White
EFF	CRI • LUMENOUTPUT	907	>90 CRI • 1x 780 Lm / 250 mA / 8,7 W
GG	REFLECTOR	47	47°
H	COLOR TEMP.	2	2700K
		3	3000K
DD	SUSP. CABLE	01	1,5 m
K	DRIVER	1	No driver
		0	Non dimmable (intern)
		2	Dimmable 1-10 V (extern)
		3	Dali (extern)
		4	Phase cut (extern)

Alu



MULTIPLE SOLUTIONS




MAGNIFIQUE PULL

3006-BB

MAGNIFIQUE BULB

3004-BB-001

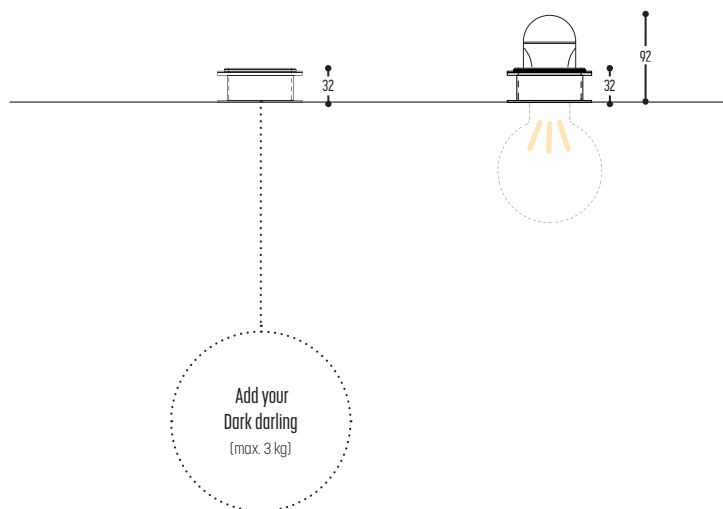

BB(B)	COLORS	02	Black
		03	White
CCC	TYPE E27	001	LED Globe (MAX 10W)



METROBOX


design dark studio for dark





METROBOX

1215-BB(B)-065-00
1215-BB(B)-806GGH-00-K




BB(B)	COLORS	02		Black
		03		White
		140		Old Pink
		141		Terracotta Red
		142		Oxide Red
		112		Gold Finish
			RAL color on request	
CCC	TYPE GUIDO	065		QPAR51 (MAX 50 W)
EFF	CRI • LUMENOUTPUT	806	>90 CRI • 2x 1000 Lm / 350 mA / 9 W	
GG	REFLECTOR	22	22°	
		34	34°	
		54	54°	
H	COLOR TEMP.	2	2700K	
		3	3000K	
K	DRIVER	0	Non dimmable (intern)	
		2	Dimmable 1-10 V (intern)	
		3	Dali (intern)	
		4	Phase cut (intern)	



METROLINE

design dark studio for dark




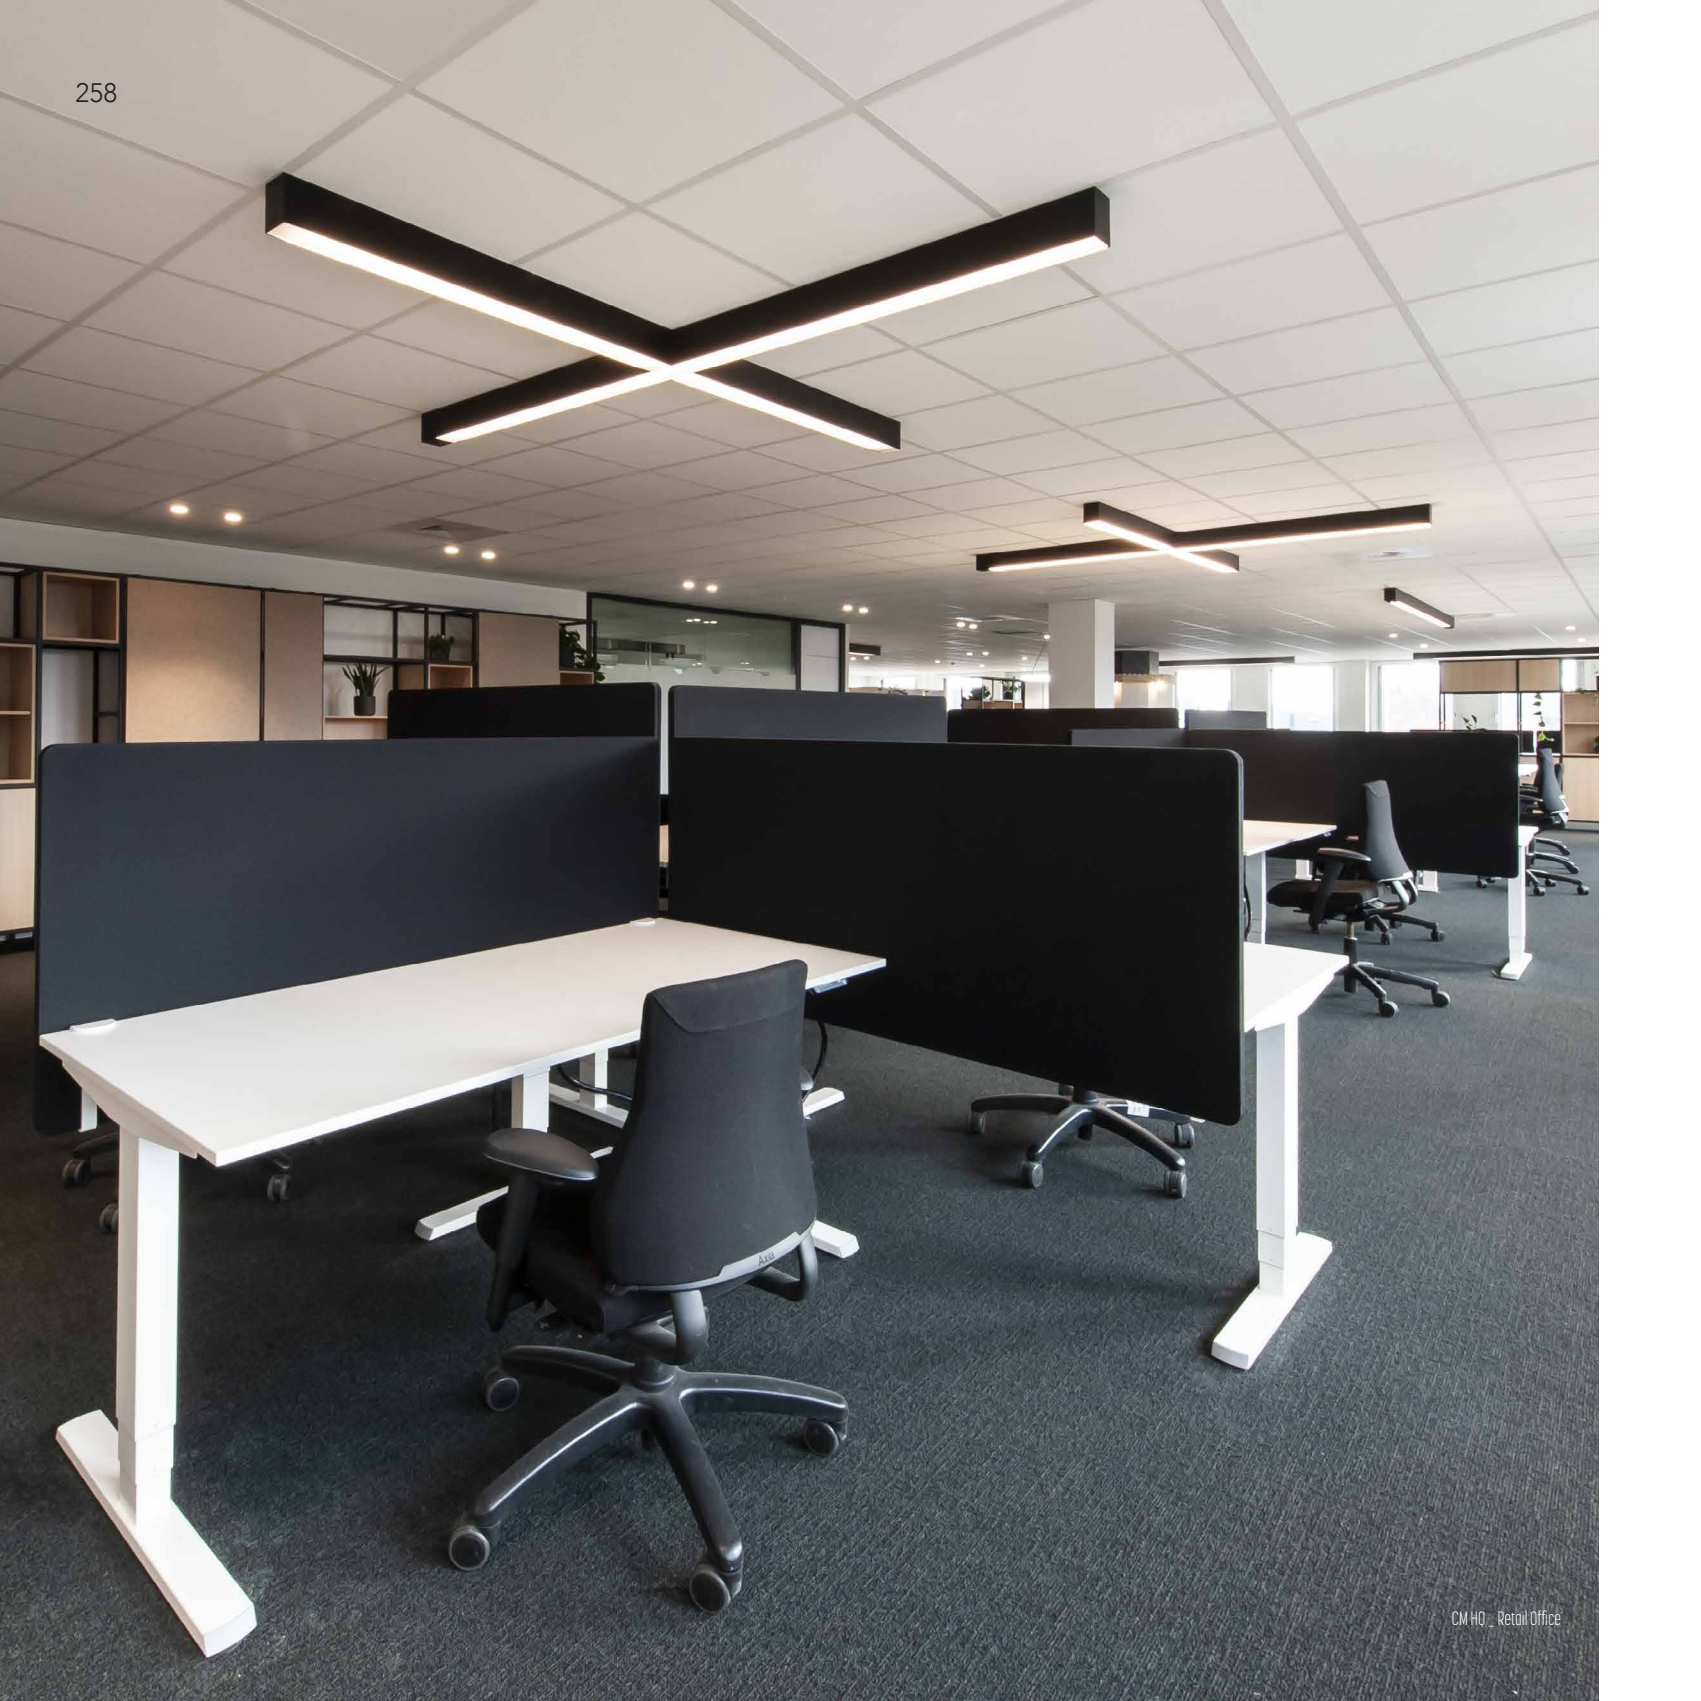




METROLINE S

AAAA-BB-13-DD-K-J

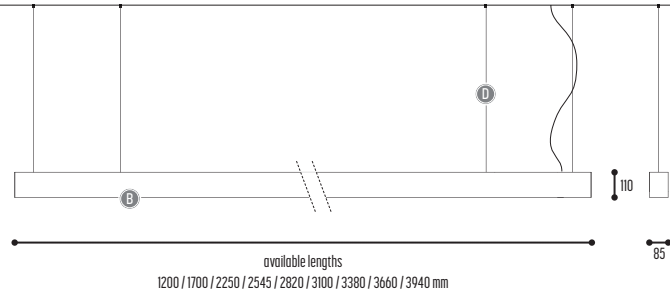



METROLINE

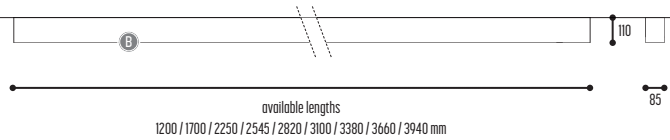
AAAA-BB-13-00-K-J



1200 mm	METROLINE 1	1200
1700 mm	METROLINE 5	1700
2250 mm	METROLINE 7	2250
2545 mm	METROLINE 8	2545
2820 mm	METROLINE 9	2820
3100 mm	METROLINE 10	3100
3380 mm	METROLINE 11	3380
3660 mm	METROLINE 12	3660
3940 mm	METROLINE 13	3940

AAAA	MODEL LENGTH	1850	METROLINE 1	1200 mm
		1851	METROLINE 5	1700 mm
		1852	METROLINE 7	2250 mm
		1853	METROLINE 8	2545 mm
		1854	METROLINE 9	2820 mm
		1855	METROLINE 10	3100 mm
		1856	METROLINE 11	3380 mm
		1857	METROLINE 12	3660 mm
		1858	METROLINE 13	3940 mm
BB	COLORS	02	 Black	
		03	 White	
		 RAL color on request		
CC	LED	13	METROLINE 1	>90CRI • 3910 Lm / 25,9 W / 3000 K
			METROLINE 5	>90CRI • 5866 Lm / 38,9 W / 3000 K
			METROLINE 7	>90CRI • 7821 Lm / 51,8 W / 3000 K
			METROLINE 8	>90CRI • 8798 Lm / 58,3 W / 3000 K
			METROLINE 9	>90CRI • 9776 Lm / 64,8 W / 3000 K
			METROLINE 10	>90CRI • 10754 Lm / 71,3 W / 3000 K
			METROLINE 11	>90CRI • 11731 Lm / 78 W / 3000 K
			METROLINE 12	>90CRI • 12709 Lm / 84,2 W / 3000 K
			METROLINE 13	>90CRI • 14664 Lm / 90,7 W / 3000 K
DD	CEILING	00	N.A	
	SUSP. CABLE	01	1,5 m	
		02	2,5 m	
		03	5 m	
K	DRIVER	0	Non dimmable (intern)	
		2	Dimmable 1-10 V (intern)	
		3	Dali (intern)	
J	DIFFUSER	0	Opal	
		1	Prismatic	

PC-Alu

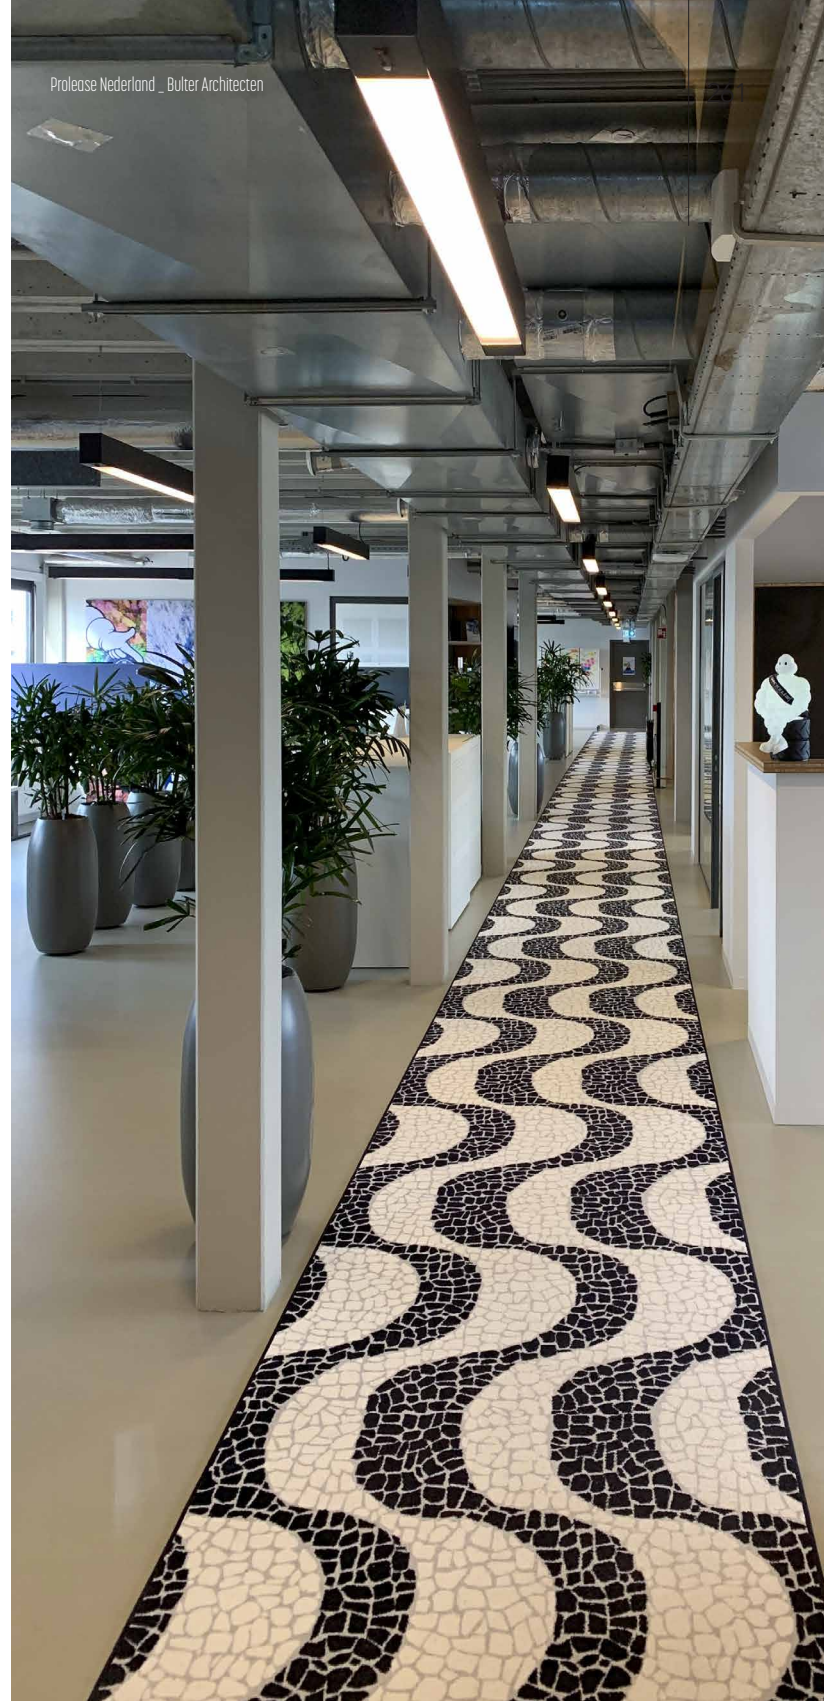

METROLINE BOX

design dark studio for dark









METROLINE BOX S

AAAA-BB-13-DD-K-J-234H

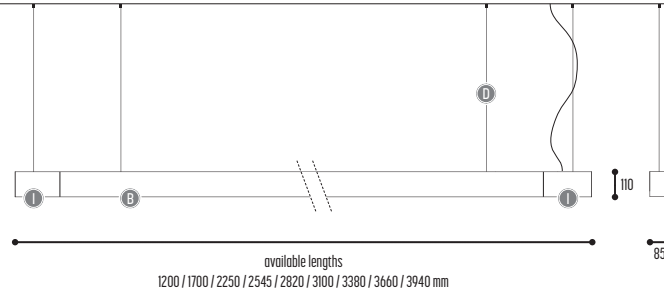




METROLINE BOX

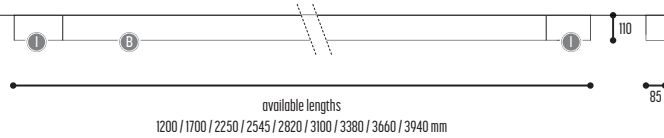AAAA-BB-13-00-K-J-234H

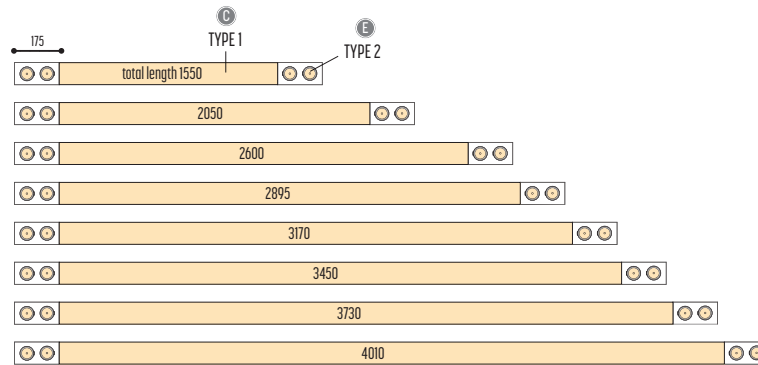


- 1550 mm METROLINE BOX 1
- 2050 mm METROLINE BOX 5
- 2600 mm METROLINE BOX 7
- 2895 mm METROLINE BOX 8
- 3170 mm METROLINE BOX 9
- 3450 mm METROLINE BOX 10
- 3730 mm METROLINE BOX 11
- 4010 mm METROLINE BOX 12



AAAA	MODEL LENGTH	2160	METROLINE BOX 1	1550 mm	
		2161	METROLINE BOX 5	2050 mm	
		2162	METROLINE BOX 7	2600 mm	
		2163	METROLINE BOX 8	2895 mm	
		2164	METROLINE BOX 9	3170 mm	
		2165	METROLINE BOX 10	3450 mm	
		2166	METROLINE BOX 11	3730 mm	
		2167	METROLINE BOX 12	4010 mm	
TYPE 1	BB	COLORS	02	Black	
			03	White	
	 RAL color on request				
	CC	LED	13	METROLINE BOX 1	>90 CRI • 3910 Lm / 25,9 W / 3000 K
				METROLINE BOX 5	>90 CRI • 5866 Lm / 38,9 W / 3000 K
				METROLINE BOX 7	>90 CRI • 7821 Lm / 51,8 W / 3000 K
				METROLINE BOX 8	>90 CRI • 8798 Lm / 58,3 W / 3000 K
				METROLINE BOX 9	>90 CRI • 9776 Lm / 64,8 W / 3000 K
				METROLINE BOX 10	>90 CRI • 10754 Lm / 71,3 W / 3000 K
				METROLINE BOX 11	>90 CRI • 11731 Lm / 78 W / 3000 K
METROLINE BOX 12	>90 CRI • 12709 Lm / 84,2 W / 3000 K				
DD	CEILING	00	N.A.		
	SUSP. CABLE	01	1,5 m		
		02	2,5 m		
		03	5 m		
K	DRIVER	0	Non dimmable (intern)		
		2	Dimmable 1-10 V (intern)		
		3	Dali (intern)		
J	DIFFUSER	0	Opal		
		1	Prismatic		
TYPE 2	E	LED	2	>90 CRI • 2x 1000 Lm / 350 mA / 9 W	
	GG	REFLECTOR	34	34°	
	H	COLOR TEMP.	2	2700 K	
			3	3000 K	
	II(I)	COLORS	02	Black	
			03	White	
			101	Soft Pink	
			103	Soft Blue	
			104	Soft Green	
			124	Kaki	
140			Old Pink		
141			Terracotta Red		
142			Oxide Red		
111			Brass Finish		
112			Gold Finish		
137			Bronze Finish		
 RAL color on request					

PC-Alu

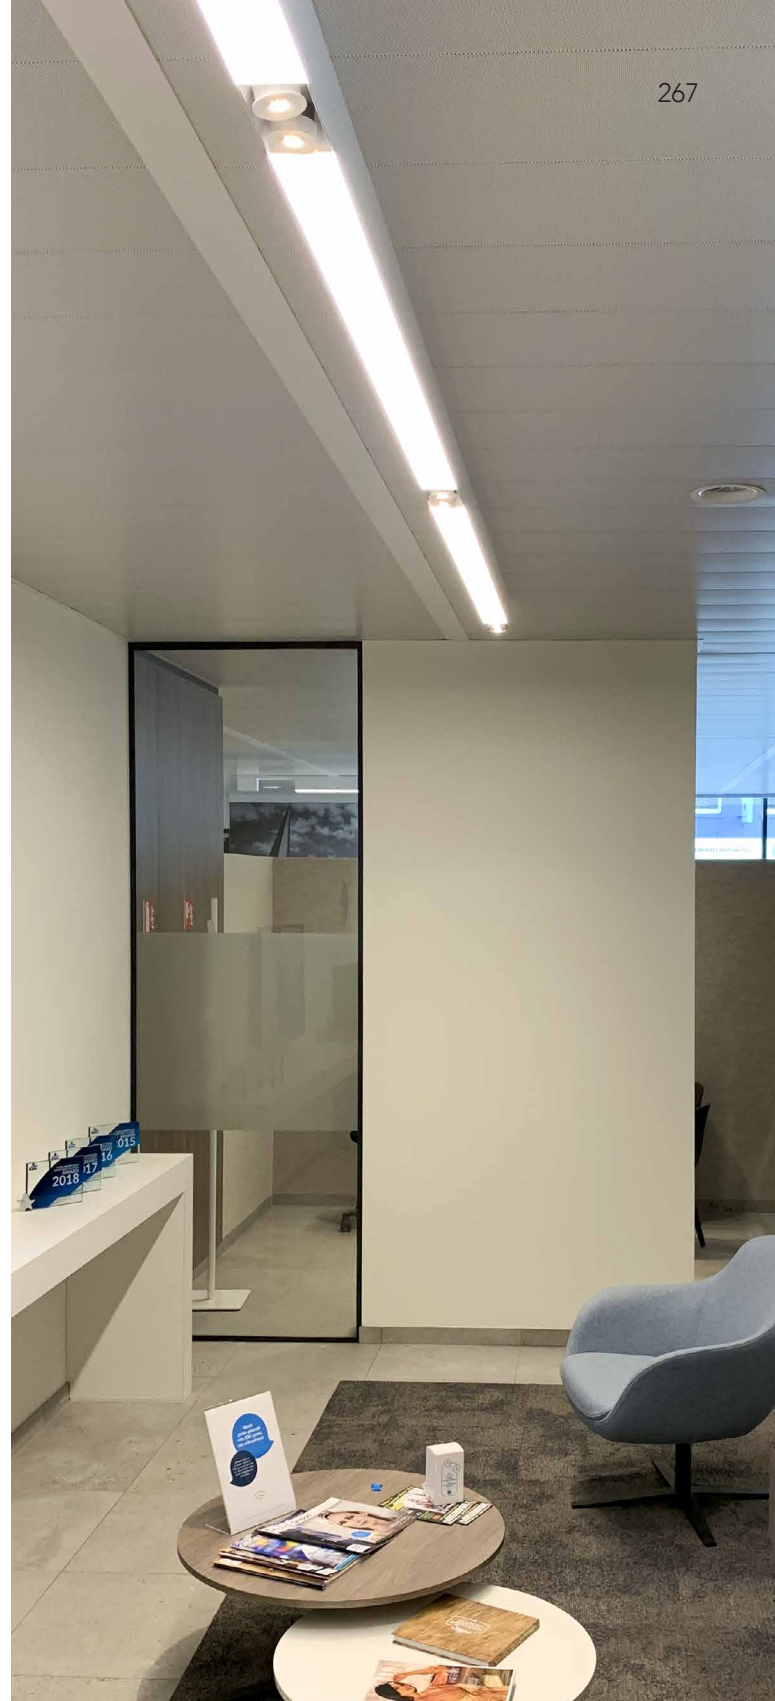

METROFFICE

design anthony boelaert for dark













METROFFICE 1
1210-BB-CC-K-J-2GGH-II(I)

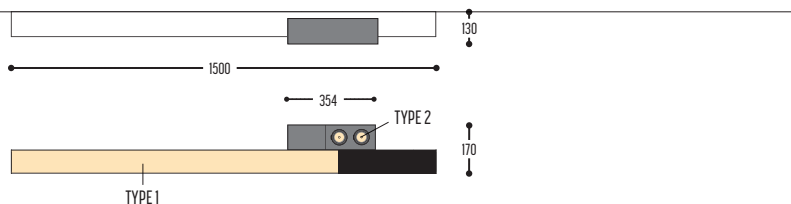

METROFFICE 7/13
CM HO - Retail Office
AAAA-BB-CC-K-J-2GGH-II(I)

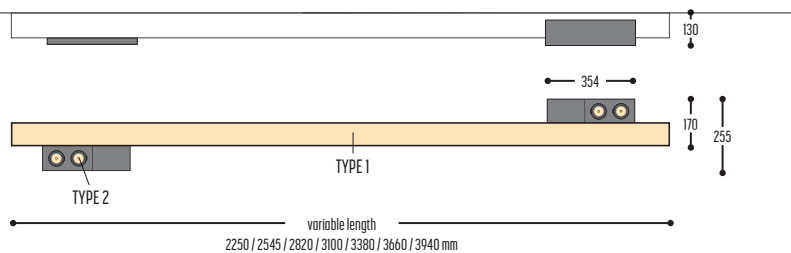

2250 mm	METROFFICE 7	2250
2545 mm	METROFFICE 8	2545
2820 mm	METROFFICE 9	2820
3100 mm	METROFFICE 10	3100
3380 mm	METROFFICE 11	3380
3660 mm	METROFFICE 12	3660
3940 mm	METROFFICE 13	3940

AAAA	MODEL LENGTH	1210	METROFFICE 1	1500 mm
		1320	METROFFICE 7	2250 mm
		1321	METROFFICE 8	2545 mm
		1322	METROFFICE 9	2820 mm
		1323	METROFFICE 10	3100 mm
		1324	METROFFICE 11	3380 mm
		1325	METROFFICE 12	3660 mm
		1326	METROFFICE 13	3940 mm

BB	COLORS	02	Black
		03	White
		RAL color on request	

CC	LED	13	METROFFICE 1	>90 CRI • 3910 Lm / 25,9 W / 3000K
			METROFFICE 7	>90 CRI • 7821 Lm / 51,8 W / 3000 K
			METROFFICE 8	>90 CRI • 8798 Lm / 58,3 W / 3000 K
			METROFFICE 9	>90 CRI • 9776 Lm / 64,8 W / 3000 K
			METROFFICE 10	>90 CRI • 10754 Lm / 71,3 W / 3000 K
			METROFFICE 11	>90 CRI • 11731 Lm / 78 W / 3000 K
			METROFFICE 12	>90 CRI • 12709 Lm / 84,2 W / 3000 K
			METROFFICE 13	>90 CRI • 14664 Lm / 90,7 W / 3000 K

K	DRIVER	0	Non dimmable (intern)
		2	Dimmable 1-10 V (intern)
		3	Dali (intern)

J	DIFFUSER	0	Opal
		1	Prismatic

E	LED	2	>90 CRI • 2x 1000 Lm / 350 mA / 9 W
---	-----	---	-------------------------------------

GG	REFLECTOR	22	22°
		34	34°
		54	54°

H	COLOR TEMP.	2	2700 K
		3	3000 K

II(I)	COLORS	02	Black
		03	White
		101	Soft Pink
		103	Soft Blue
		104	Soft Green
		124	Kaki
		140	Old Pink
		141	Terracotta Red
		142	Oxide Red
		111	Brass Finish
		112	Gold Finish
		137	Bronze Finish
		RAL color on request	





MR BEAM


design detail concept for dark



reddot design award
winner 2017

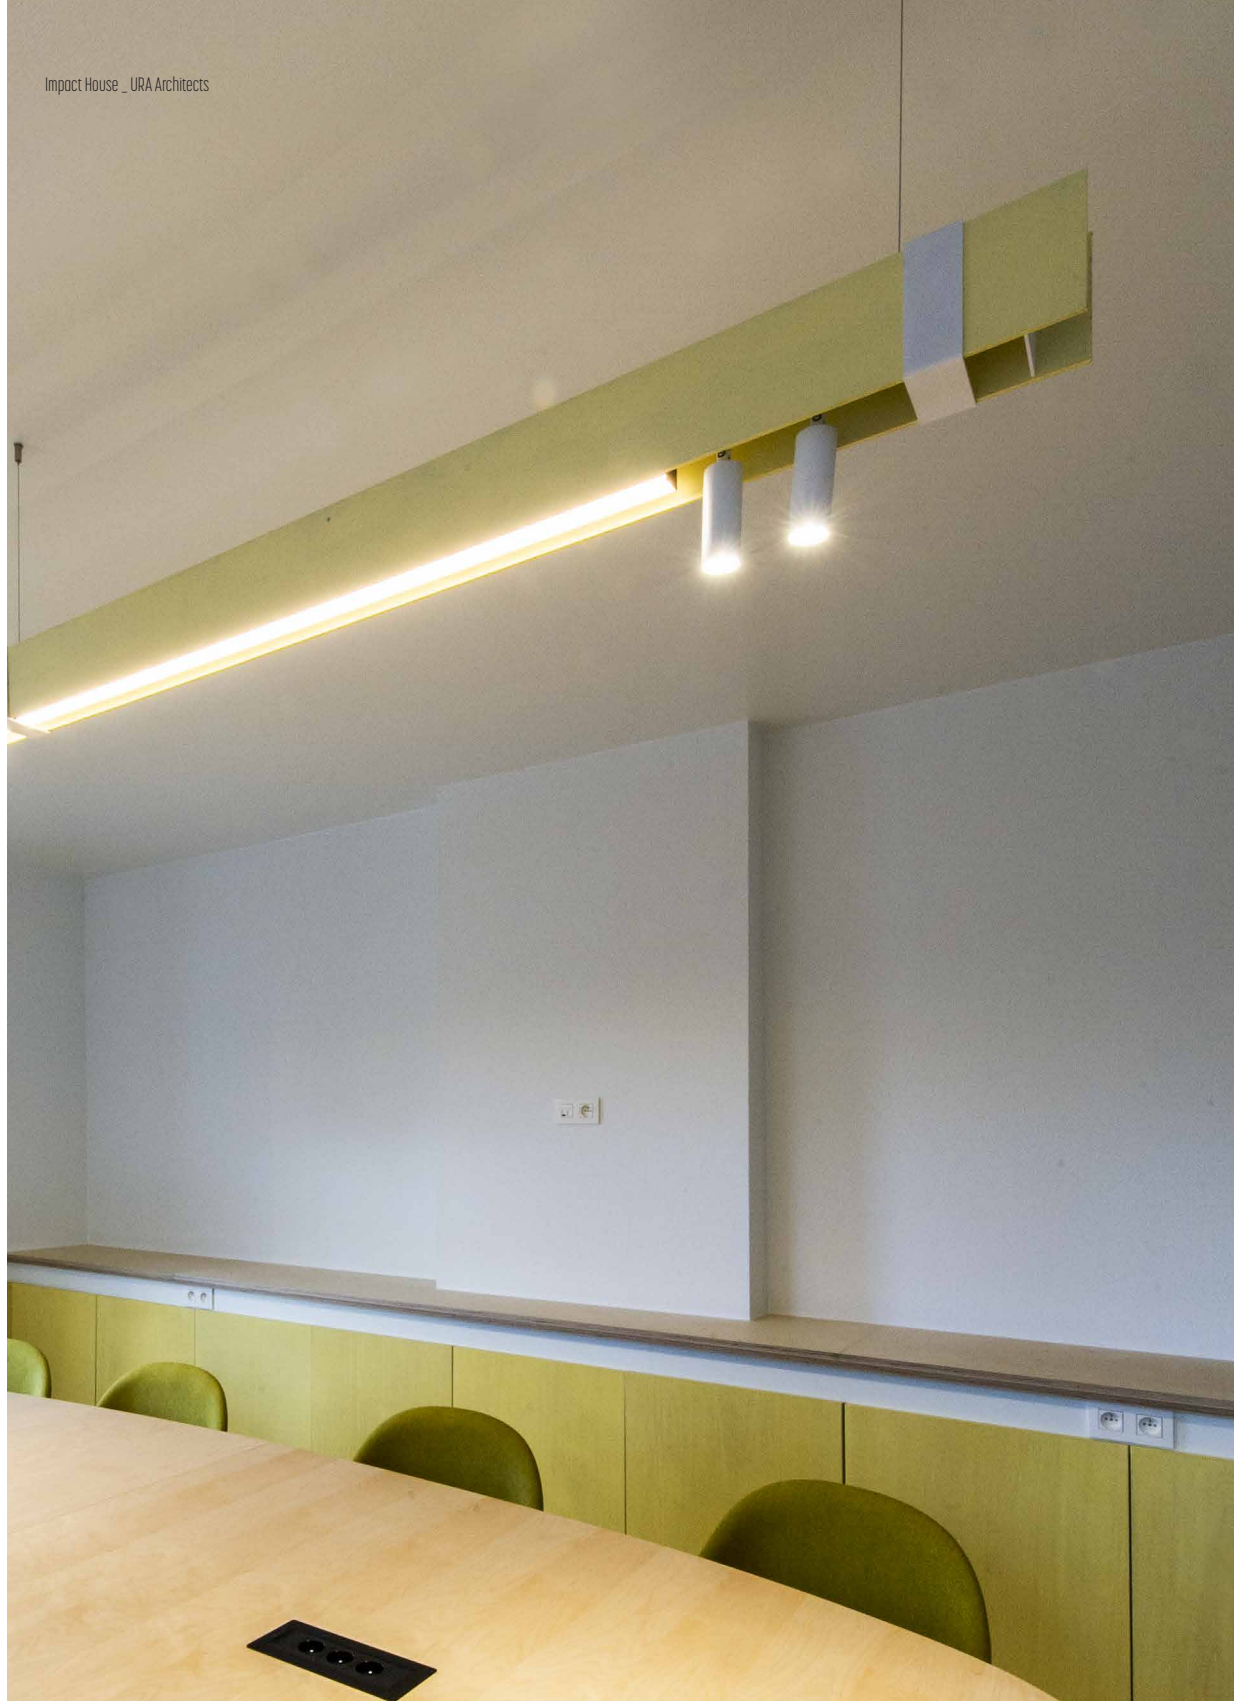


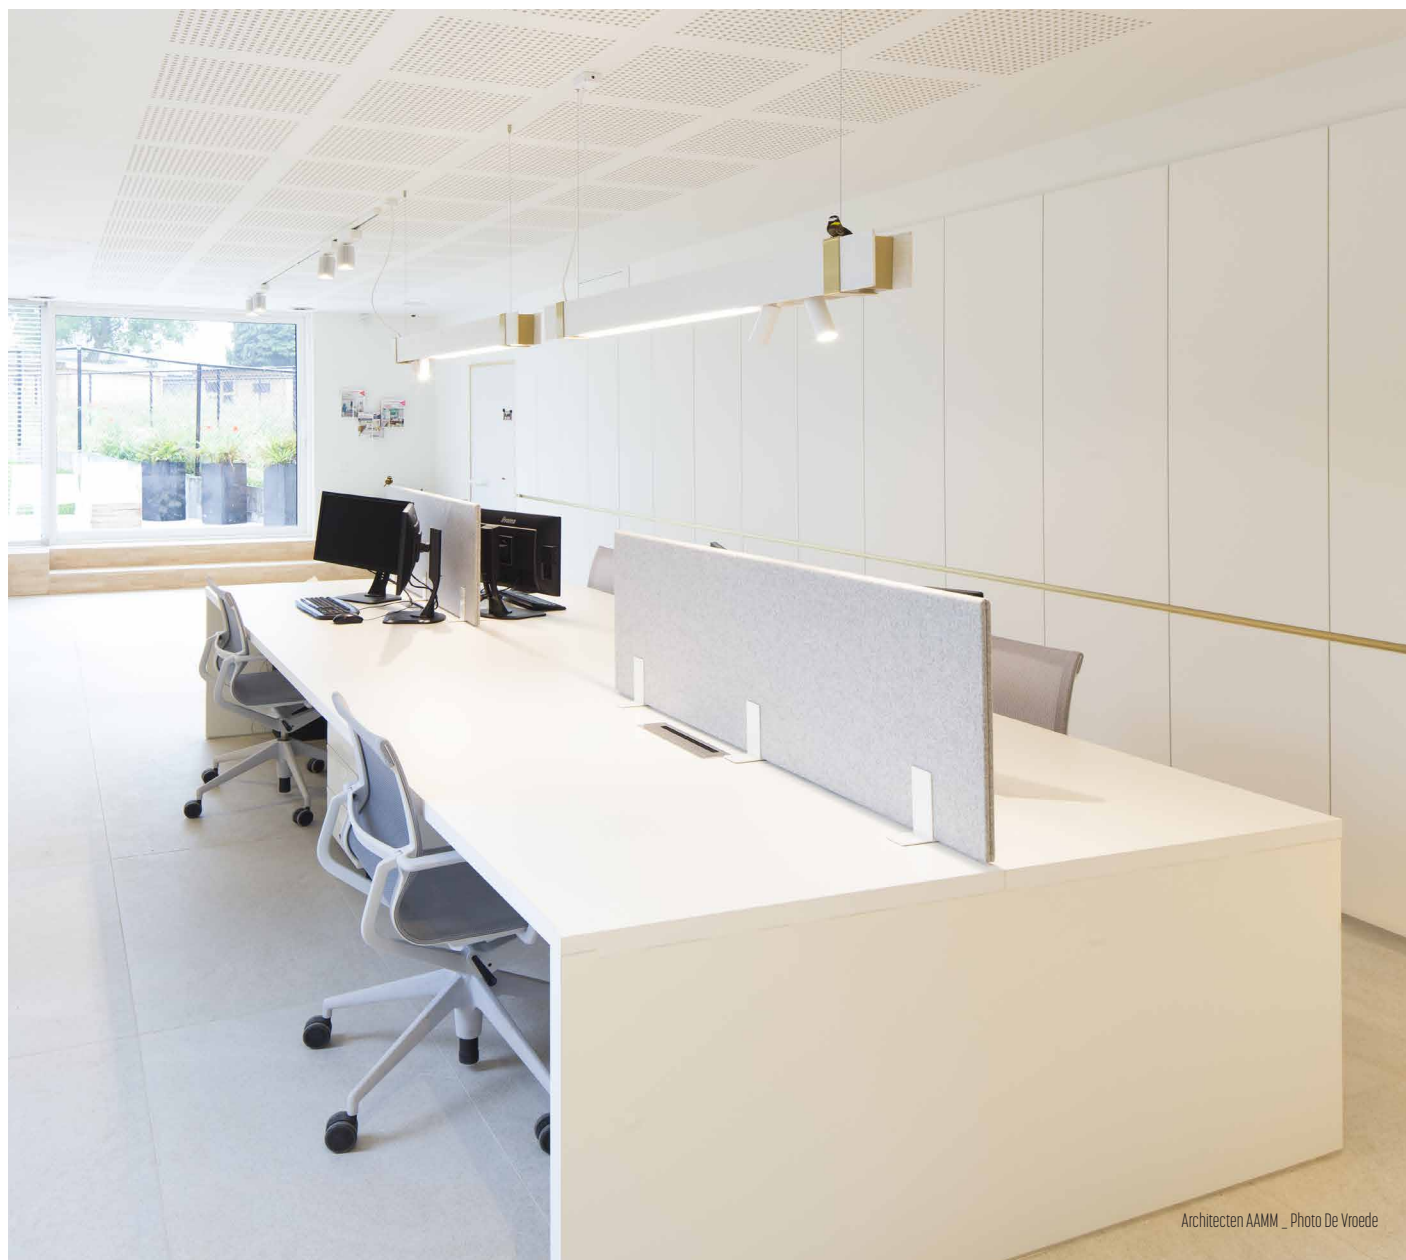

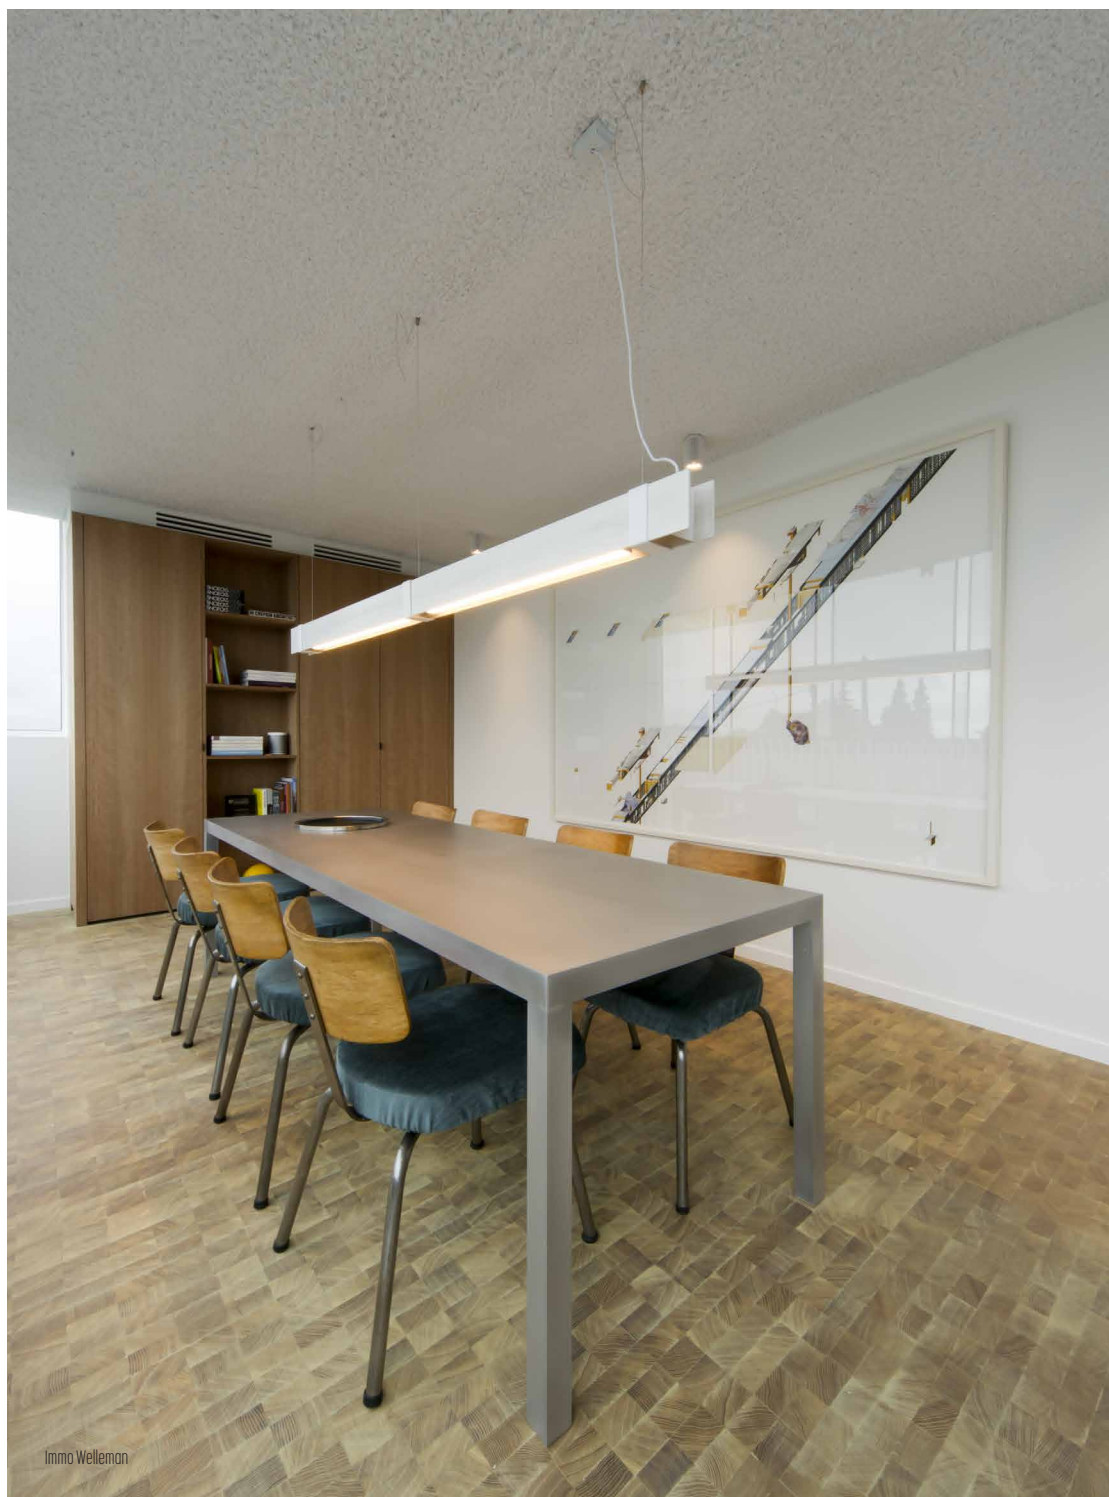







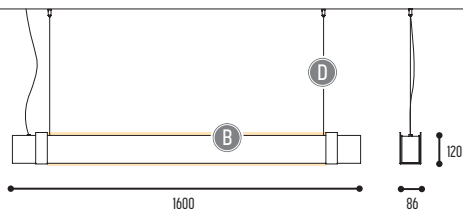

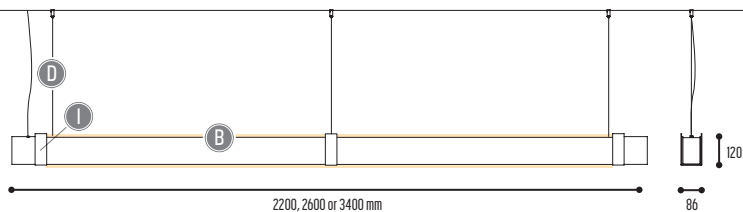

MR.BEAM 1

1600 mm 2301-BBB-1H-DD-II(I)-(J)-LL-K



2200 mm 2306-BBB-1H-DD-II(I)-(J)-LL-K
 2600 mm 2304-BBB-1H-DD-II(I)-(J)-LL-K
 3400 mm 2307-BBB-1H-DD-II(I)-(J)-LL-K



BBB	MATERIAL	117		Oak stained black
		118		Oak natural
		131		Oak stained white
		 RAL color on request		
F	LED	1	length 1600 mm	>90 CRI • 1680 Lm / 34,5 W
			length 2200 mm	>90 CRI • 2660 Lm / 54,7 W
			length 2600 mm	>90 CRI • 3220 Lm / 66,2 W
			length 3400 mm	>90 CRI • 4340 Lm / 89,2 W
H	COLOR TEMP.	2	2700 K	
		3	3000 K	
DD	SUSP. CABLE.	01	1,5 m	
		02	2,5 m	
II(I)	COLORS	02	 Black	
		03	 White	
		110	 Brass	
(J) optional	UPLIGHT	1	9,6 W / m	
LL	SUSP. KIT	02	 Black	
		03	 White	
K	DRIVER	0	Non dimmable (intern)	
		2	Dimmable 1-10 V (intern)	
		3	Dali (intern)	
		4	Phase cut (intern)	


Alu-Metal-Wood











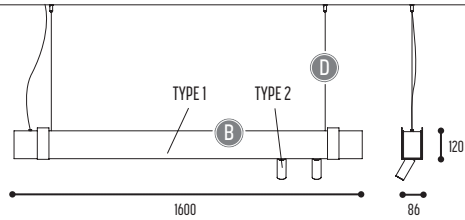

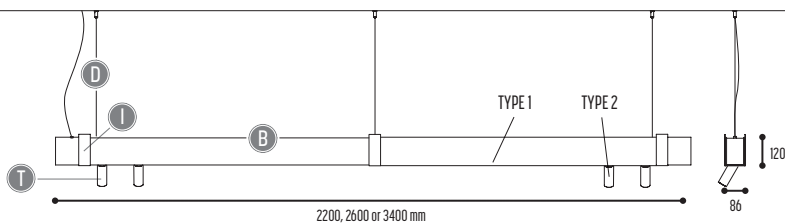

MR.BEAM 2

1600 mm 2302-BBB-1H-DD-II(I)-(J)-LL-K-T



2200 mm 2308-BBB-1H-DD-II(I)-(J)-LL-K-T
 2600 mm 2305-BBB-1H-DD-II(I)-(J)-LL-K-T
 3400 mm 2309-BBB-1H-DD-II(I)-(J)-LL-K-T



BBB	MATERIAL	117		Oak stained black
		118		Oak natural
		131		Oak stained white
		 RAL color on request		
F	LED	1	length 1600 mm	>90 CRI • 1680 Lm / 34,5 W
			length 2200 mm	>90 CRI • 2660 Lm / 54,7 W
			length 2600 mm	>90 CRI • 3220 Lm / 66,2 W
			length 3400 mm	>90 CRI • 4340 Lm / 89,2 W
H	COLOR TEMP.	2	2700 K	
		3	3000 K	
TYPE 1	DD	SUSP. CABLE.	01	1,5 m
			02	2,5 m
II(I)	COLORS	02		Black
		03		White
		110		Brass
(J) optional	UPLIGHT	1	9,6 W / m	
LL	SUSP. KIT	02		Black
		03		White
K	DRIVER	0	Non dimmable (intern)	
		2	Dimmable 1-10 V (intern)	
		3	Dali (intern)	
		4	Phase cut (intern)	
TYPE 2	T	SPOTS	1	>90 CRI • 600 Lm / 350 mA / 6 W Reflector 54° - Incl driver - non dim

Alu-Metal-Wood



NINZA

design dark studio for dark











NINZA S

1796-BB-FFGH-DD-K-NN(N)

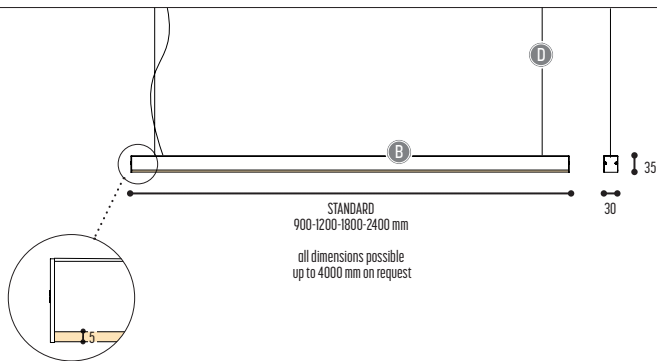


NINZA C

1797-BB-FFGH-K-NN(N)

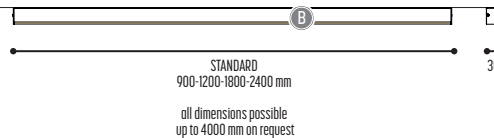

BB	COLORS	02	Black
		03	White
		RAL color on request	
FF	LED	09	>80 CRI • 450 Lm/m / 9,6 W/m
		14	>90 CRI • 700 Lm/m / 14,4 W/m
		28	>90 CRI • 1450 Lm/m / 28,8 W/m
G	DIFFUSER	P	Plexi
		2	2700 K
H	COLOR TEMP.	3	3000 K
		4	4000 K
		all dimensions possible up to 4000 mm on request	
DD	SUSP. CABLE.	01	1,5 m
		02	2,5 m
K	DRIVER	0	Non dimmable (extern)
		2	Dimmable 1-10 V (extern)
		3	Dali (extern)
		4	Phase cut (extern)
NN(N)	LENGTH	90	900 mm
		120	1200 mm
		180	1800 mm
		240	2400 mm
		all dimensions possible up to 4000 mm on request	




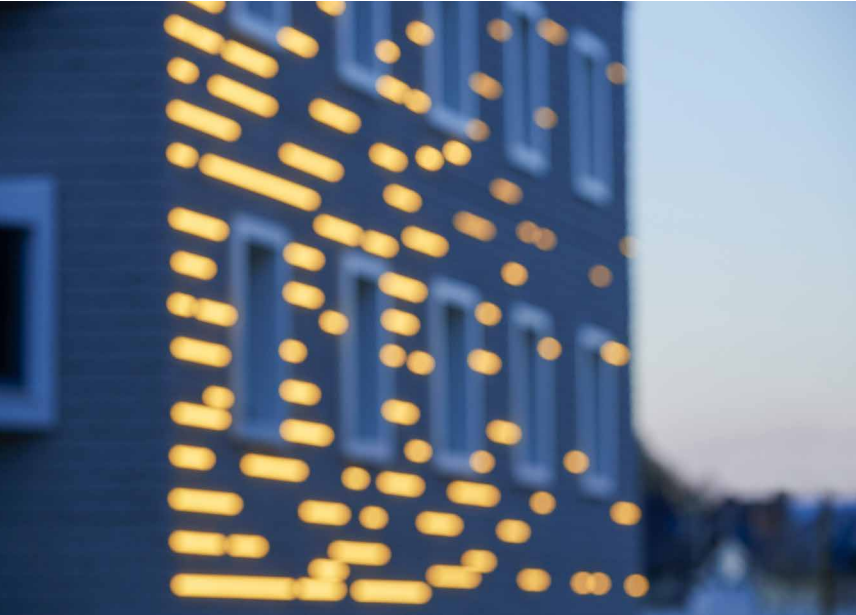


NINZA

IP65 1800-BB-FFGH-K-NN(N)   SEALED+PLEXI

IP67 1803-BB-FFGH-K-NN(N)   SEALED

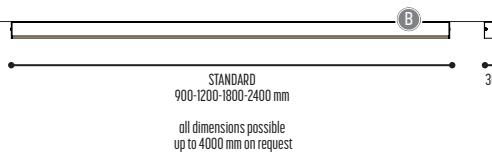

BB	COLORS	02		Black
		03		White
		 RAL color on request		
FF	LED	09	>80 CRI • 450 Lm/m / 9,6 W/m	
		14	>90 CRI • 700 Lm/m / 14,4 W/m	
		28	>90 CRI • 1450 Lm/m / 28,8 W/m	
G	DIFFUSER	P	Plexi	
H	COLOR TEMP.	2	2700 K	
		3	3000 K	
		4	4000 K	
K	DRIVER	0	Non dimmable (extern)	
		2	Dimmable 1-10 V (extern)	
		3	Dali (extern)	
		4	Phase cut (extern)	
NN(N)	LENGTH	90	900 mm	
		120	1200 mm	
		180	1800 mm	
		240	2400 mm	
		all dimensions possible up to 4000 mm on request		

Alu-PC



NO COPY


design anthony duffeleer for dark






NO COPY

230-03-CCC-DD
230-03-5103-DD-K
230-03-EFF-DD-K

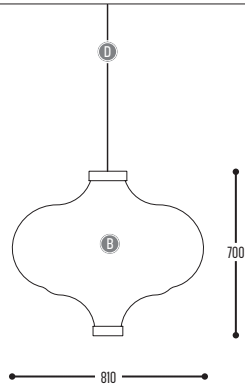

NO COPY SNAKE

231-03-CCC-DD
231-03-5103-DD-K
231-03-EFF-DD-K

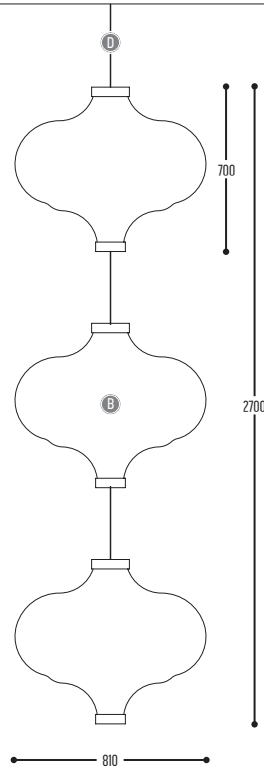

BB	MATERIAL	03	White (translucent)
CCC	TYPE G5	324	T16 (24 W) Non Dim
		325	T16 (24 W) Dim 1-10 V
		326	T16 (24 W) ONE 4 ALL
EFF	CRI • LUMENOUTPUT	510	>90 CRI • 8000 Lm / 370 mA / 79 W
H	COLOR TEMP.	3	3000 K
DD	SUSP. CABLE	02	2,5 m
		03	5 m
K	DRIVER	0	Non dimmable (intern)
		2	Dimmable 1-10 V (intern)
		3	Dali (intern)

BB	MATERIAL	03	White (translucent)
EFF	CRI • LUMENOUTPUT	500	RGB
		505	RGBW
DD	SUSP. CABLE	02	2,5 m
		03	5 m
K	DRIVER	0	Standalone • remote control (intern)
		3	Dali (intern)
		9	DMX (intern)



NO FRUIT

design anthony duffeleer for dark



DESIGN **PLUS**
2004














NO FRUIT

150-03-CCC-DD
 150-03-5103-DD-K
 150-03-EFF-DD-K

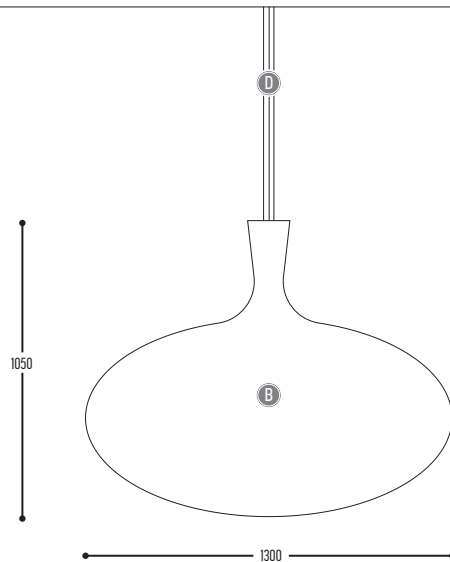

BB	MATERIAL	03	White (translucent)
CCC	TYPE G5	339	T16 (39 W) Non Dim
		340	T16 (39 W) Dim 1-10 V
		341	T16 (39 W) ONE 4 ALL
EFF	CRI • LUMENOUTPUT	510	>90 CRI • 8000 Lm / 480 mA / 75 W
H	COLOR TEMP.	3	3000 K
DD	SUSP. CABLE	02	2,5 m
		03	5 m
K	DRIVER	0	Non dimmable (intern)
		2	Dimmable 1-10 V (intern)
		3	Dali (intern)

BB	MATERIAL	03	White (translucent)
EFF	CRI • LUMENOUTPUT	500	RGB
		505	RGBW
DD	SUSP. CABLE	02	2,5 m
		03	5 m
K	DRIVER	0	Standalone + remote control (intern)
		3	Dali (intern)
		9	DMX (intern)

PE-Metal



OBLIVION

design arne quinze for dark



Pami










OBLIVION

240-03-CCC-DD
 240-03-5103-DD-K
 240-03-EFF-DD-K

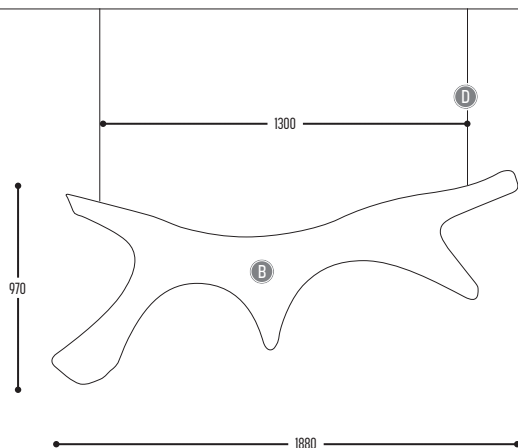

BB	MATERIAL	03	White (translucent)
CCC	TYPE G5	339	T16 (39 W) Non Dim
		340	T16 (39 W) Dim 1-10 V
		341	T16 (39 W) ONE 4 ALL
EFF	CRI • LUMENOUTPUT	510	>90 CRI • 8000 Lm / 480 mA / 75 W
H	COLOR TEMP.	3	3000 K
DD	SUSP. CABLE	02	2,5 m
		03	5 m
K	DRIVER	0	Non dimmable (intern)
		2	Dimmable 1-10 V (intern)
		3	Dali (intern)

BB	MATERIAL	03	White (translucent)
EFF	CRI • LUMENOUTPUT	500	RGB
		505	RGBW
DD	SUSP. CABLE	02	2,5 m
		03	5 m
K	DRIVER	0	Standalone • remote control (intern)
		3	Dali (intern)
		9	DMX (intern)

PE-Metal




ORGUE

design luc vincent & maxin pien for dark





ORGUE
1363-BB(B)-866003-DD-K

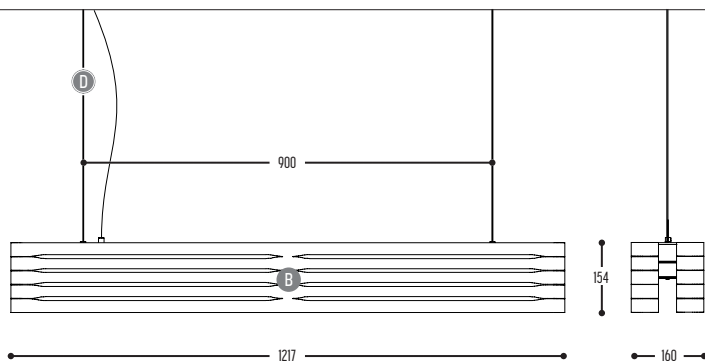



BB(B)	COLORS	02		Black
		03		White
		101		Soft Pink
		103		Soft Blue
		104		Soft Green
		124		Kaki
		140		Old Pink
		141		Terracotta Red
		142		Oxide Red
		110		Brass
		112		Gold Finish
		137		Bronze Finish
		RAL color on request		
EFF	CRI • LUMENOUTPUT	866	>85 CRI • 1x 7640 Lm / 49,6 W	
GG	REFLECTOR	00	N.A.	
H	COLOR TEMP.	3	3000K	
DD	SUSP. CABLE	01	1,5 m	
		02	2,5 m	
K	DRIVER	0	Non dimmable (intern)	
		2	Dimmable 1-10 V (intern)	
		3	Dali (intern)	

Alu-Metal





ORGUE WALL
1360-BB(B)-80500H-00-K




BB(B)	COLORS	02		Black
		03		White
		101		Soft Pink
		103		Soft Blue
		104		Soft Green
		124		Kaki
		140		Old Pink
		141		Terracotta Red
		142		Oxide Red
		110		Brass
		112		Gold Finish
		137		Bronze Finish
EFF	CRI • LUMENOUTPUT	805	>85 CRI • 2x 450 Lm / 700mA / 6 W	
GG	REFLECTOR	00	N.A.	
H	COLOR TEMP.	2	2700K	
		3	3000K	
		4	4000K	
K	DRIVER	0	Non dimmable (intern)	
		1	No driver	
		2	1-10 V (extern)	
		3	Dali (extern)	
		4	Phase cut (intern)	

Alu-Metal




PETROL

design dark studio for dark

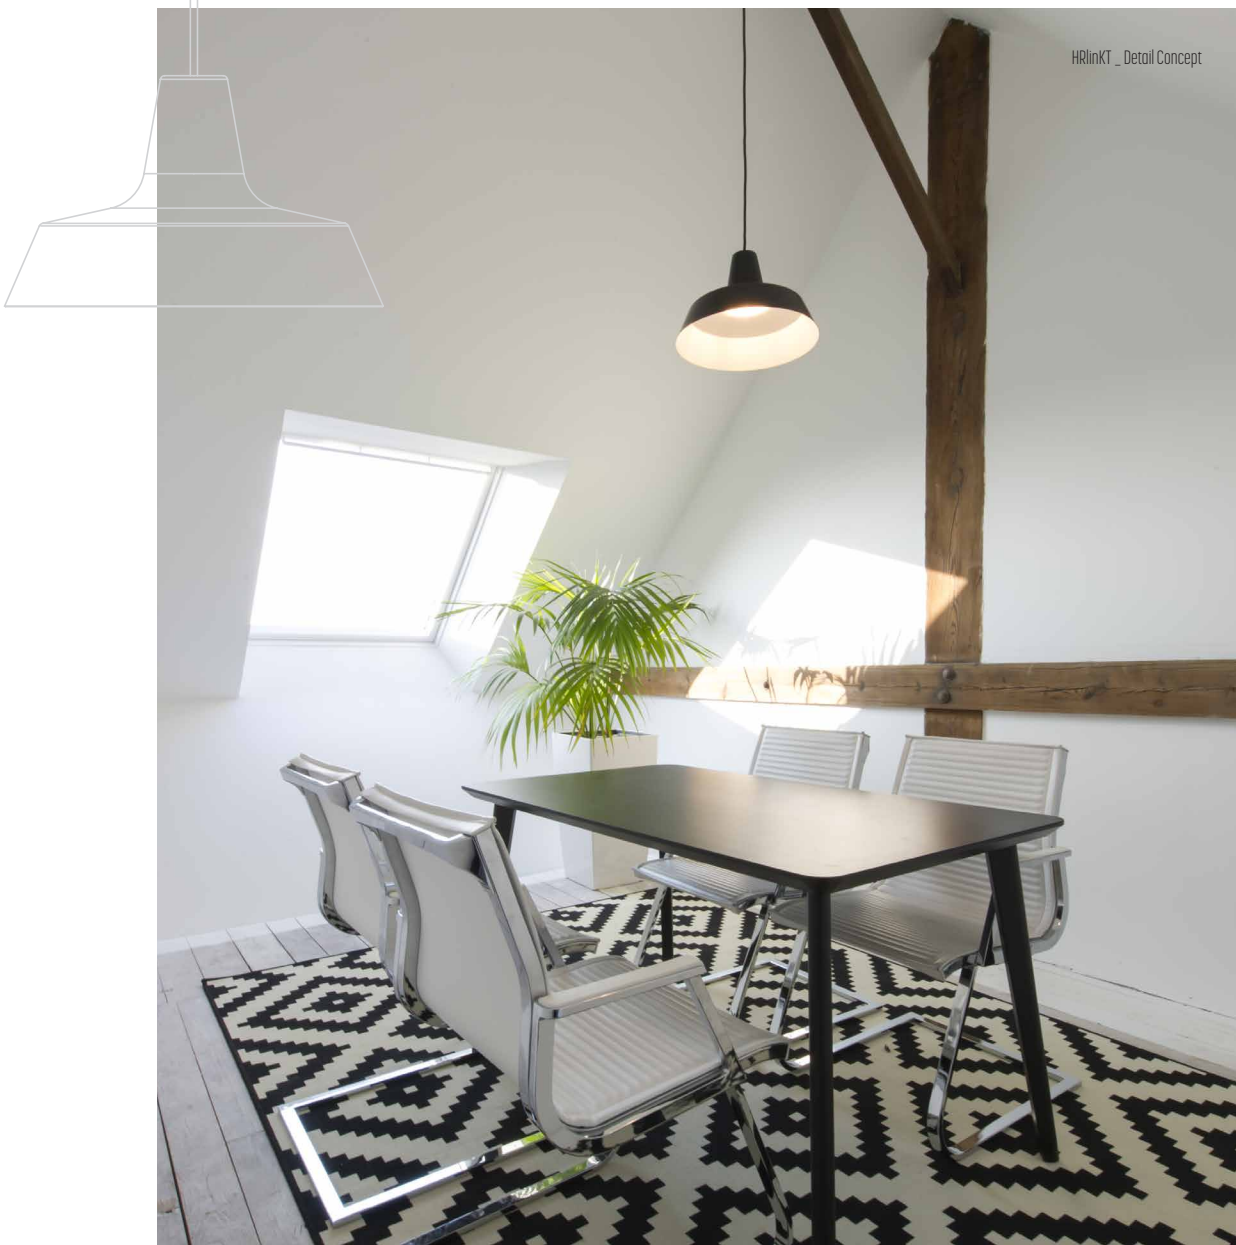



PETROL
1834-BB(B)-001-DD-EE

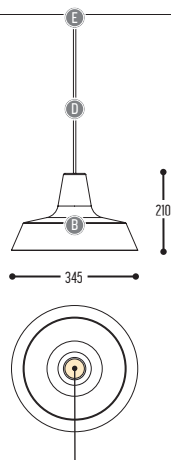

E27/G80 FILAMENT-LAMP:
to be ordered separately

BB(B)	COLORS	02		Black
		03		White
		101		Soft Pink
		103		Soft Blue
		104		Soft Green
		124		Kaki
		140		Old Pink
		141		Terracotta Red
		142		Oxide Red
		111		Brass Finish
		112		Gold Finish
		137		Bronze Finish
		RAL color on request		
CCC	TYPE E27	001		LED (MAX 12 W)
DD	SUSP. CABLE	01		1,5 m
		02		2,5 m
EE	SUSP. KIT	02		Black
		03		White

Metal




RBA


design ricardo bofill taller de arquitectura for Dark




RBA 1
3045-BB(B)-C-K

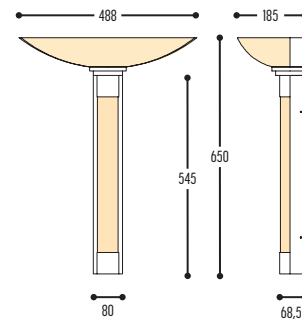

RBA 2
3046-BB(B)-C-K



RBA 3
3047-BB(B)-C-K

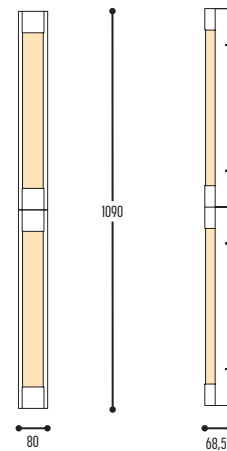

BB(B)	COLORS	02	Black
		03	White
		110	Brass
C	RBA 1	2	>90 CRI • 600-800 Lm / 15-25 W / 2700 K
		3	>90 CRI • 600-800 Lm / 15-25 W / 3000 K
	RBA 2	2	>90 CRI • 800 Lm / 25 W / 2700 K
		3	>90 CRI • 800 Lm / 25 W / 3000 K
	RBA 3	2	>90 CRI • 1600 Lm / 50 W / 2700 K
		3	>90 CRI • 1600 Lm / 50 W / 3000 K
K	DRIVER	1	No driver
		0	Non dimmable (intern)
		2	Dimmable 1-10 V (intern)
		3	Dali (intern)

Alu-Metal




ROND-L


design detail concept for dark






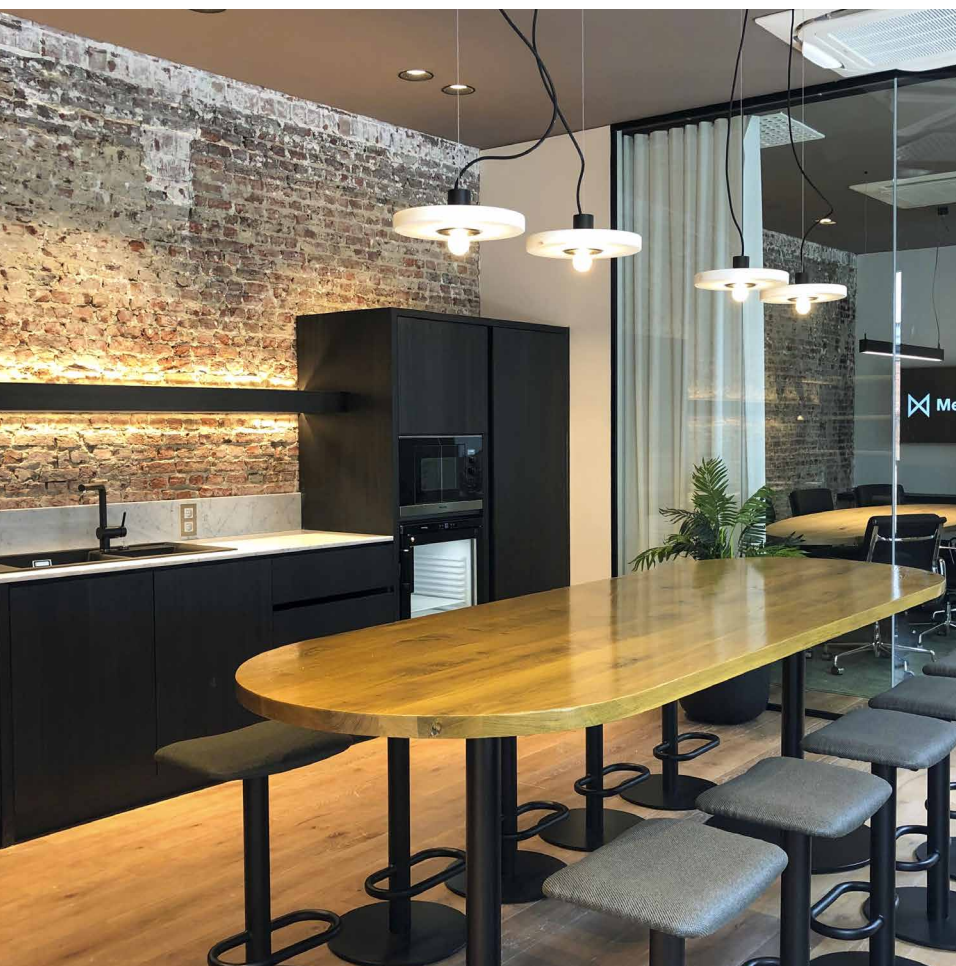




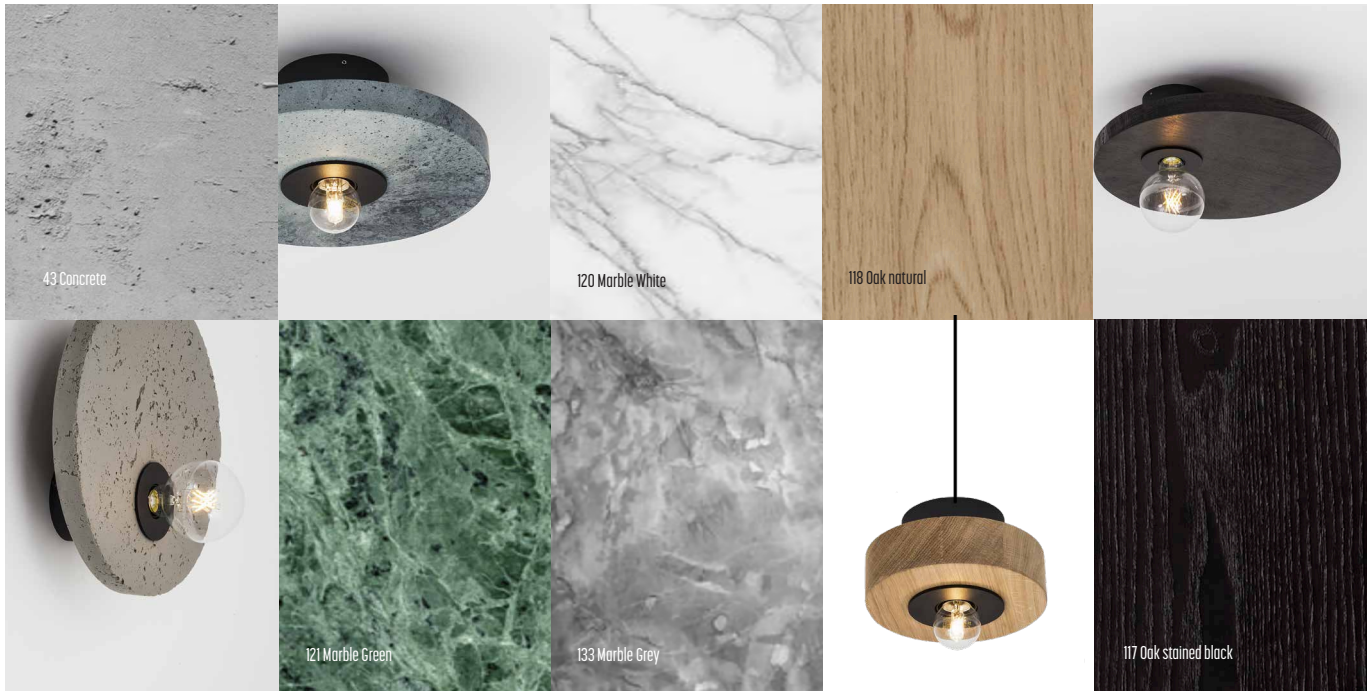


ROND-L 1S
1245-BB(B)-001-DD-II(I)-LL




ROND-L 2S
1246-BB(B)-001-DD-II(I)-LL

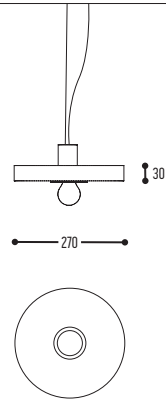


ROND-L 3S
1247-BB(B)-001-DD-II(I)-LL

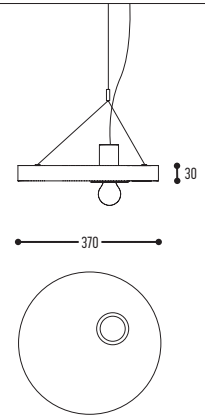


ROND-L 1
1248-BB(B)-001-II(I)




ROND-L 2
1249-BB(B)-001-II(I)










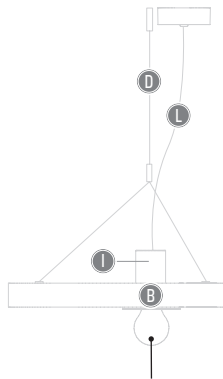












ROND-L 3
1250-BB(B)-001-II(I)





E27 FILAMENT-LAMP:
to be ordered separately


BB(B)	MATERIALS	43		Concrete
		67		Cork
		117		Oak stained black
		118		Oak natural
		132		Driftwood
		120		Marble White
		121		Marble Green
		133		Marble Grey
<small>not on available on ROND-L 3S & ROND-L 3</small>				
CCC	TYPE E27	001		LED (MAX 8 W)
DD	SUSP. CABLE	01		1,5 m
		02		2,5 m
II(I)	COLORS	02		Black
		03		White
		103		Soft Blue
		104		Soft Green
		124		Kaki
		112		Gold Finish
LL	SUSP. KIT	02		Black
		03		White
		04		Pink












Alu-chosen material.

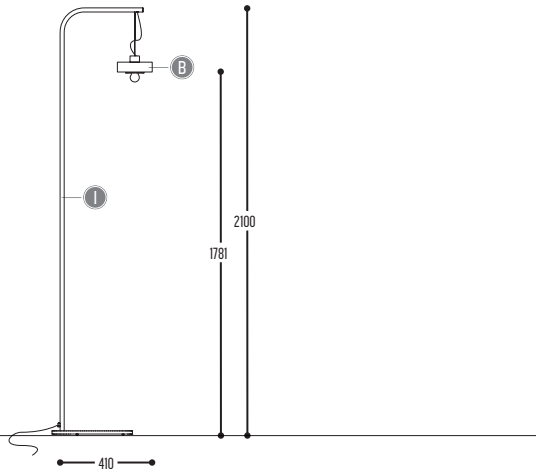



ROND-L FLOOR
1256-BB(B)-001-II(I)




BB(B)	MATERIALS	67		Cork
		117		Oak stained black
		118		Oak natural
		132		Driftwood
CCC	TYPE E27	001		LED (MAX 8 W)
DD	SUSP. CABLE	01	1,5 m	
		02	2,5 m	
II(I)	COLORS	02		Black
		03		White
		103		Soft Blue
		104		Soft Green
		124		Kaki
		112		Gold Finish



SANGHA

design dark studio for dark

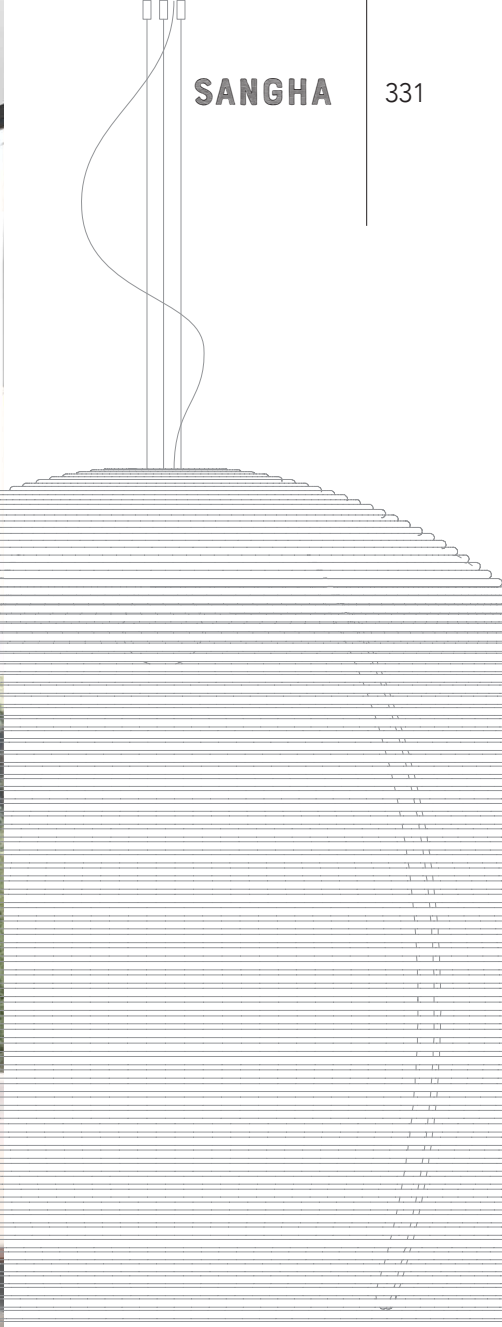










Bib Waregem - Goedefroo - Goedefroo Architects




SANGHA 30

1010-1-BB(B)-001-DD-LL




SANGHA 40

1010-2-BB(B)-001-DD-LL




SANGHA 50



1010-3-BB(B)-001-DD-LL



SANGHA 80

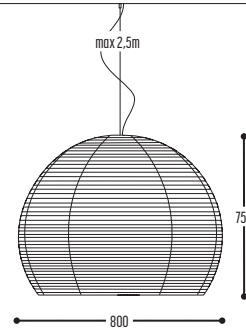1010-4-BB(B)-001-DD-LL
1010-4-BB(B)-914002-DD-LL-K

SANGHA 120

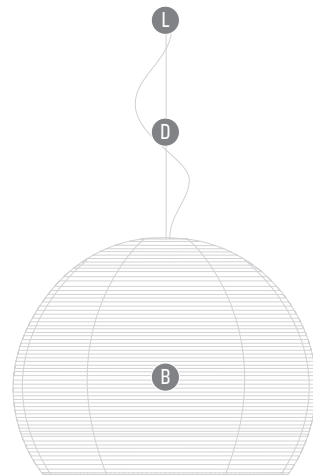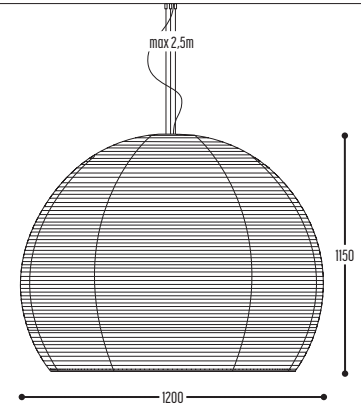1010-5-BB(B)-001-DD-LL
1010-4-BB(B)-914002-DD-LL-K

BBB	COLORS	02		Black
		03		White
		37		Natural
		101		Soft Pink
		103		Soft Blue
		104		Soft Green
		124		Kaki
		140		Old Pink
		141		Terracotta Red
		142		Oxide Red
		RAL color on request		
CCC	TYPE E27	001		LED (MAX 12 W)
EFF	CRI • LUMENOUTPUT	914	>90 CRI • 1400 Lm / 350 mA / 14 W	
GG	REFLECTOR	00	N.A.	
H	COLOR TEMP.	2	2700K	
DD	SUSP. CABLE	01	1,5 m	
		02	2,5 m	
LL	SUSP. KIT	02	Black	
		03	White	
K	DRIVER	0	Non dimmable (intern)	
		2	Dimmable 1-10 V (intern)	
		3	Dali (intern)	

Rattan




SATURNUZ

design jacob de baan for dark








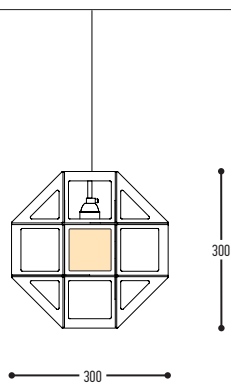

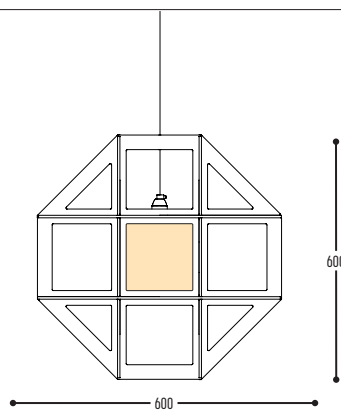

SATURNUZ 30
1380-BB(B)-001-DD-EE-II



SATURNUZ 60
1381-BB(B)-001-DD-EE-II



BBB	COLORS	116		Multiplex Poplar
CCC	TYPE E27	001		LED (MAX.12 W)
DD	SUSP. CABLE	01		1,5 m
		02		2,5 m
EE	SUSP. KIT	02		Black
		03		White
II	COLOR DIFFUSER	13		White
		127		Satin Red

Wood - PMMA




SIBI

design dark studio for dark



SIBI
2580-BB(B)-906GGH-K



BB(B)	COLORS	02	Black
		03	White
		101	Soft Pink
		103	Soft Blue
		104	Soft Green
		124	Kaki
		140	Old Pink
		141	Terracotta Red
		142	Oxide Red
		111	Brass Finish
		112	Gold Finish
137	Bronze Finish		
			RAL color on request
EFF	CRI • LUMENOUTPUT	906	>90 CRI • 1x 600 Lm / 350 mA / 6,4 W
GG	REFLECTOR	22	22°
		34	34°
		54	54°
H	COLOR TEMP.	2	2700K
		3	3000K
K	DRIVER	1	No driver
		0	Non dimmable (intern)
		2	Dimmable 1-10 V (intern)
		3	Dali (intern)

on request: incl. emergency unit 1h + incl emergency battery

Alu





SOYUZ

design dark studio for dark





SOYUZ
1080-BB(B)-001-DD-E

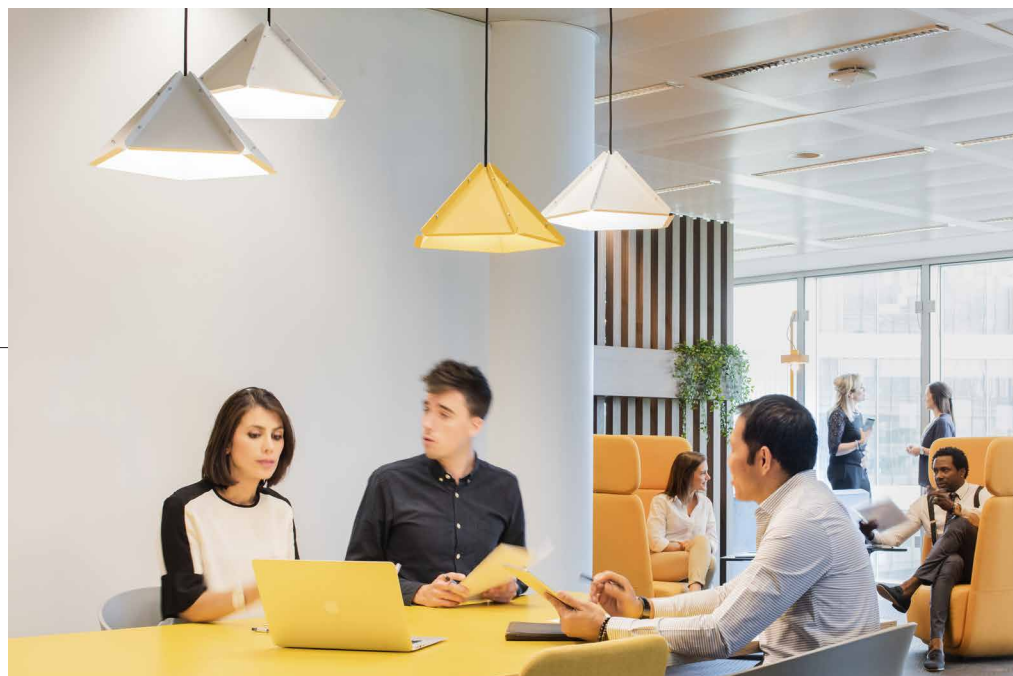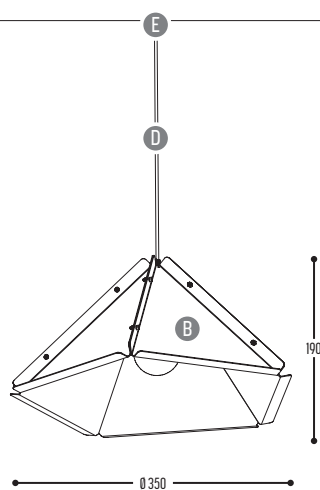


BB(B)	COLORS	02		Black
		03		White
		101		Soft Pink
		103		Soft Blue
		104		Soft Green
		124		Kaki
		140		Old Pink
		141		Terracotta Red
		142		Oxide Red
		110		Brass
		137		Bronze Finish
			RAL color on request	
CCC	TYPE E27	001		LED (MAX 12 W)
DD	SUSP. CABLE	01	1,5 m	
		02	2,5 m	
EE	SUSP. KIT	B	Black	
		W	White	

Metal



SPACEBOT

design constantin wortmann for dark

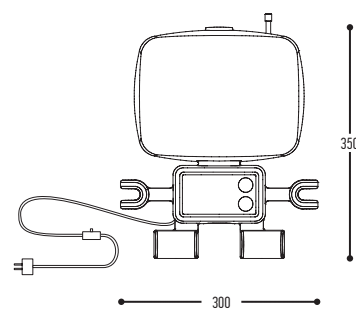

SPACEBOT
900-03-600-00


BB	MATERIAL	03	White (translucent)
CCC	TYPE E14	600	1x LED Candle (5,5 W)

PE-Metal



SPACEWALKER

design constantin wortmann for dark

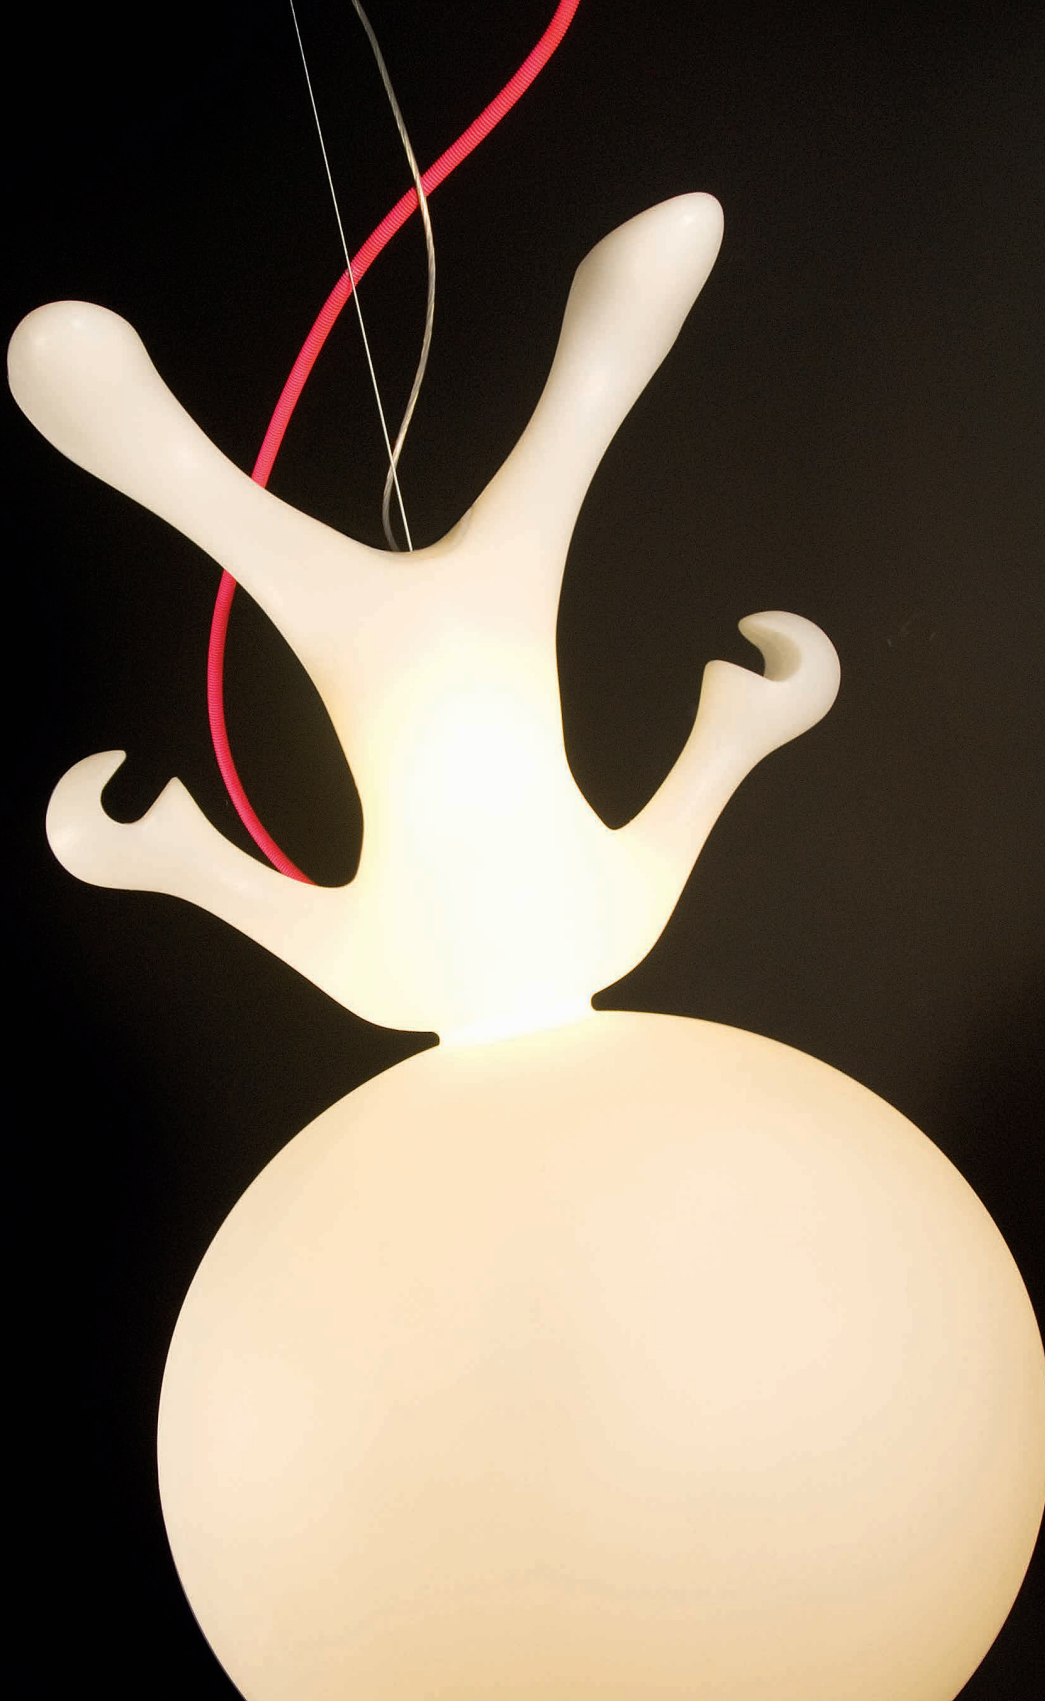


reddot design award
best of the best 2009





SPACEWALKER FLOOR


580-03-5103-00-K
580-03-EFF-00-K

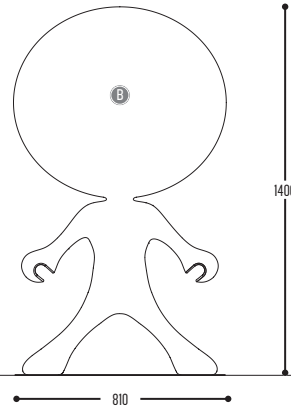

IP65 LED version
available on request

SPACEWALKER

580-03-CCC-DD
580-03-5103-DD-K
580-03-EFF-DD-K

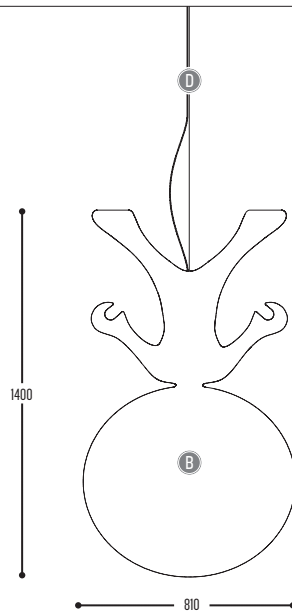

BB	MATERIAL	03	White (translucent)
CCC	TYPE G5	339	T16 (39 W) Non Dim
		340	T16 (39 W) Dim 1-10 V
		341	T16 (39 W) ONE 4 ALL
EFF	CRI • LUMENOUTPUT	510	>90 CRI • 8000 Lm / 480 mA / 75 W
H	COLOR TEMP.	3	3000 K
DD	SUSP. CABLE	00	N.A.
		02	2,5 m
		03	5 m
K	DRIVER	0	Non dimmable (intern)
		2	Dimmable 1-10 V (intern)
		3	Dali (intern)
BB	MATERIAL	03	White (translucent)
EFF	CRI • LUMENOUTPUT	500	RGB
		505	RGBW
DD	SUSP. CABLE	00	N.A.
		02	2,5 m
		03	5 m
K	DRIVER	0	Standalone • remote control (intern)
		3	Dali (intern)
		9	DMX (intern)

PE-Metal



SPACEWALKER JR

design constantin wortmann for dark




reddot design award
best of the best 2009







SPACEWALKER JR
584-03-600-DD

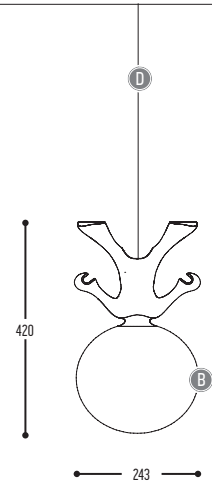



SPACEWALKER
583-03-600-00

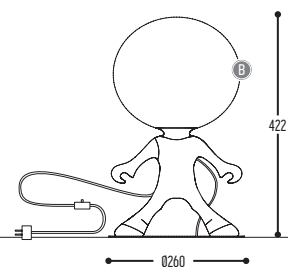

BB	MATERIAL	03	White (translucent)
CCC	TYPE E14	600	 1x LED Candle (5,5 W)
DD	SUSP. CABLE	00	N.A.
		02	2,5 m
		03	5 m

PE-Metal



SPAZE

design anthony boelaert for dark




reddot design award
winner 2017









SPAZE 1 S
1286-BB-13-01-K-J-234H-II(I)

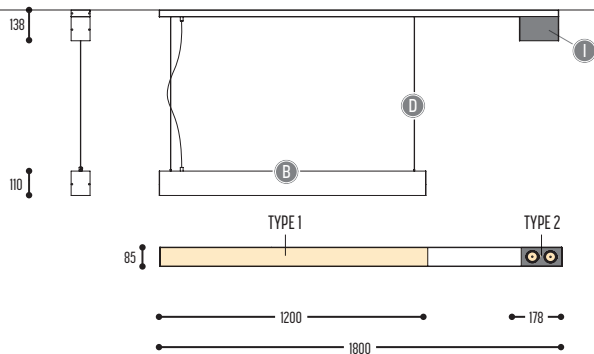

SPAZE 1
1285-BB-13-K-J-234H-II(I)

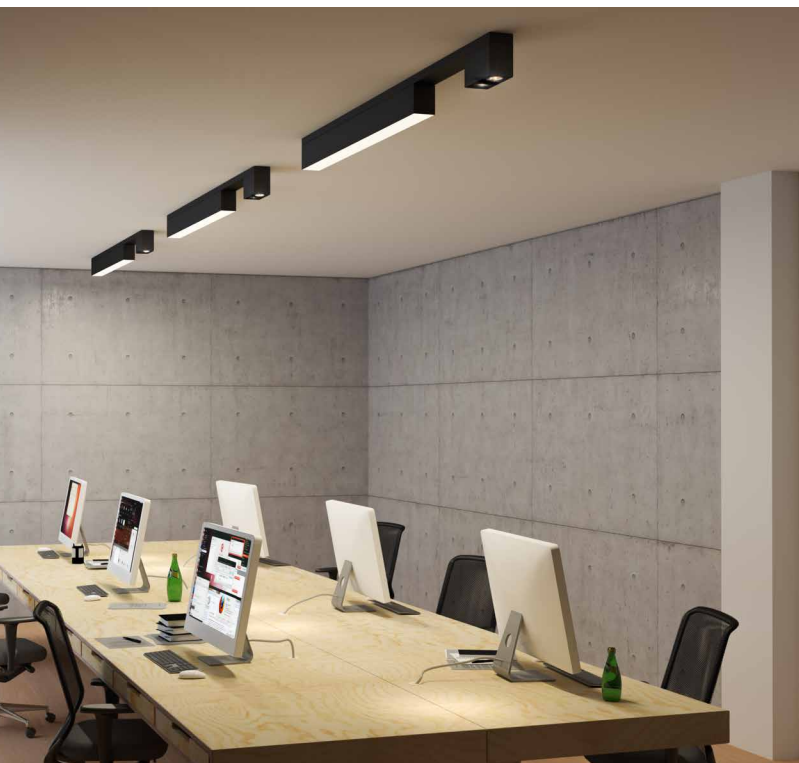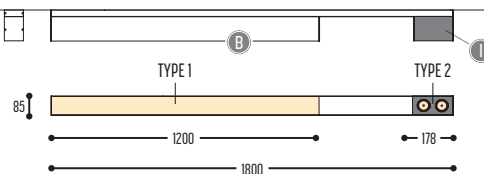



TYPE 1	BB	COLORS	02	Black
			03	White
	CC	LED	13	>90 CRI • 3910 Lm / 25,9 W / 3000K
	DD	SUSP. CABLE	01	1,5 m
	K	DRIVER	0	Non dimmable (intern)
			2	Dimmable 1-10 V (intern)
			3	Dali (intern)
	J	DIFFUSER	0	Opal
			1	Prismatic
	E	LED	2	>90 CRI • 2x1000 Lm / 350 mA / 9 W
	GG	REFLECTOR	34	34°
	H	COLOR. TEMP.	2	2700 K
			3	3000 K
TYPE 2	II(I)	COLORS	02	Black
			03	White
			101	Soft Pink
			103	Soft Blue
			104	Soft Green
			124	Kaki
			140	Old Pink
			141	Terracotta Red
			142	Oxide Red
			111	Brass Finish
			112	Gold Finish
137	Bronze Finish			
			RAL color on request	





SPACE 3 S
1296-BB-13-01-K-J-234H-II(I)

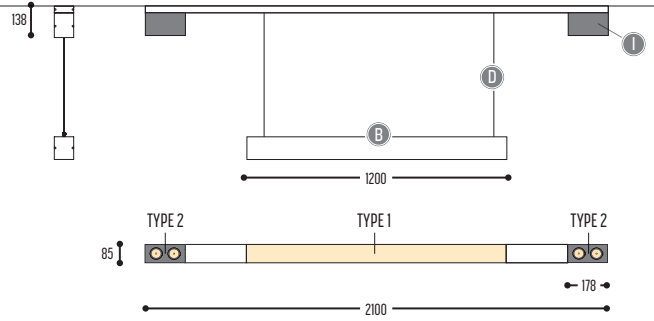


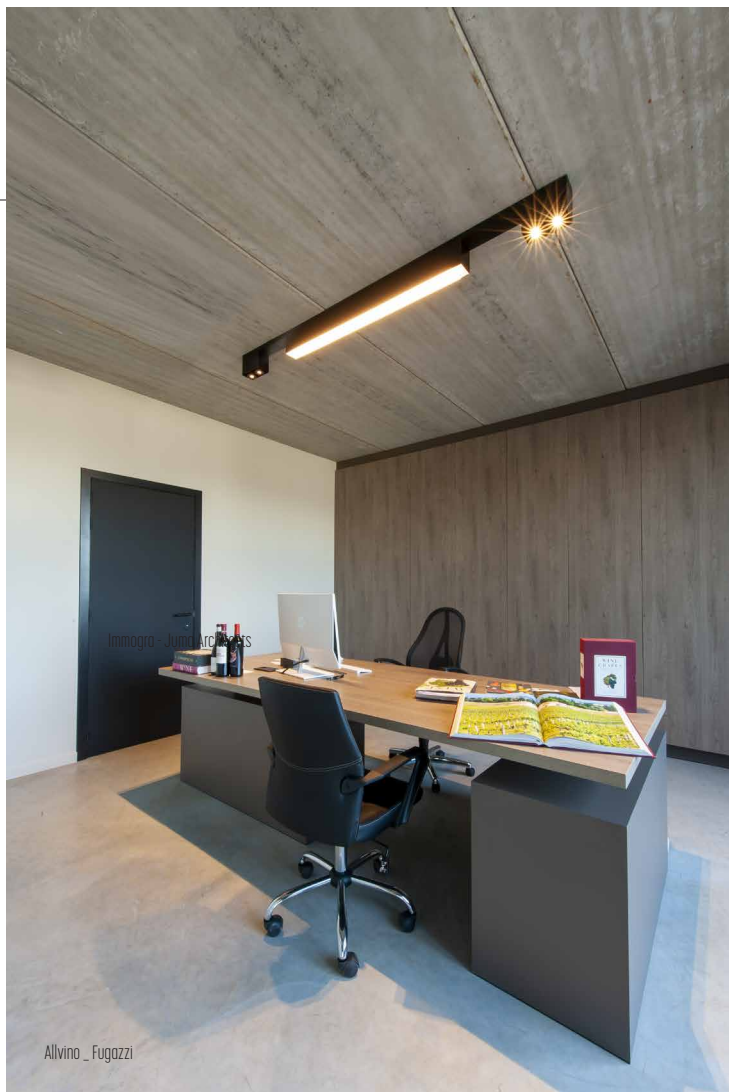

Alvino_Fugozzi



SPAZE 3
1293-BB-13-K-J-234H-II(I)


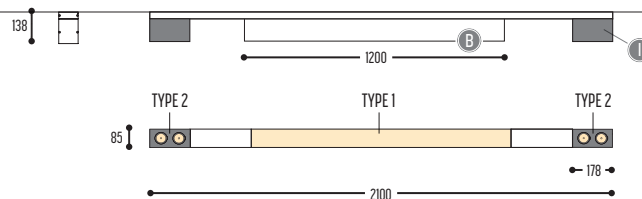


BB	COLORS	02	Black
		03	White
	CC	LED	13
DD	SUSP. CABLE.	01	1,5 m
K	DRIVER	0	Non dimmable (intern)
		2	Dimmable 1-10 V (intern)
		3	Dali (intern)
J	DIFFUSER	0	Opal
		1	Prismatic
E	LED	2	>90 CRI • 4x 1000 Lm / 350 mA / 9 W
GG	REFLECTOR	34	34°
H	COLOR. TEMP.	2	2700 K
		3	3000 K
II(I)	COLORS	02	Black
		03	White
		101	Soft Pink
		103	Soft Blue
		104	Soft Green
		124	Kaki
		140	Old Pink
		141	Terracotta Red
		142	Oxide Red
		111	Brass Finish
112	Gold Finish		
137	Bronze Finish		
			RAL color on request






SPAZE 5 S
1297-BB-13-01-K-J-234H-III(I)

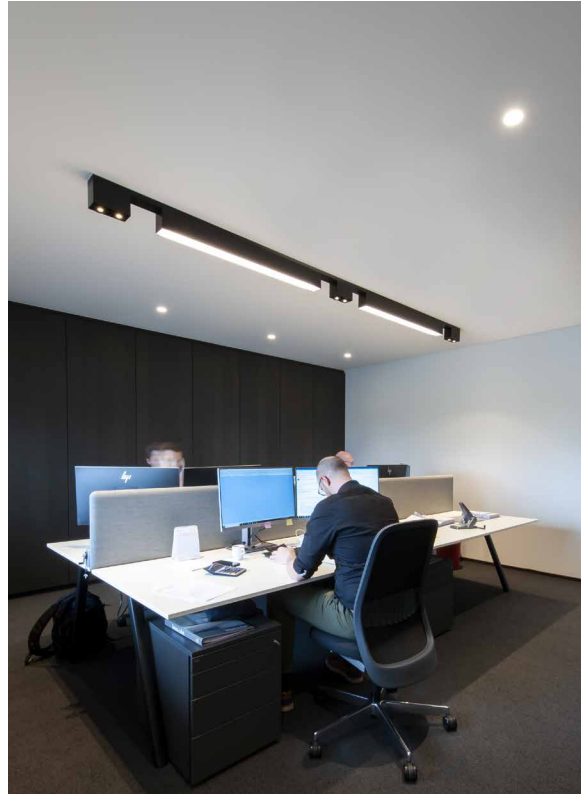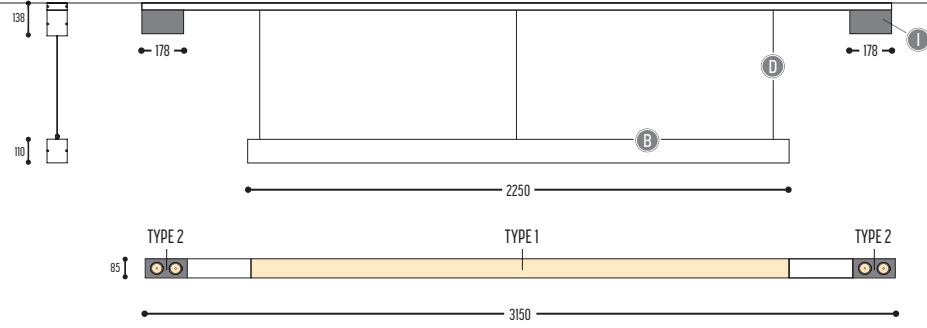



SPAZE 5
1294-BB-13-K-J-234H-II(I)

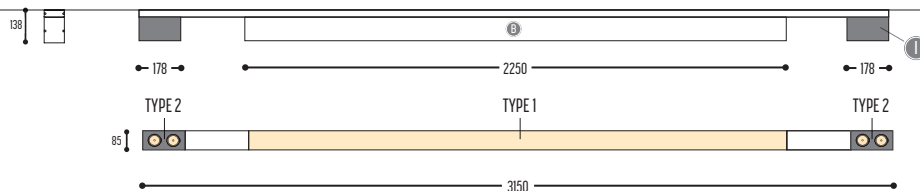



TYPE 1	BB	COLORS	02		Black	
			03		White	
	CC	LED	13	>90 CRI • 7821 Lm / 51,8 W / 3000 K		
	DD	SUSP. CABLE.	01	1,5 m		
K	DRIVER	0	Non dimmable (intern)			
		2	Dimmable 1-10 V (intern)			
		3	Dali (intern)			
J	DIFFUSER	0	Opal			
		1	Prismatic			
TYPE 2	E	LED	2	>90 CRI • 4x 1000 Lm / 350 mA / 9 W		
	GG	REFLECTOR	34	34°		
	H	COLOR. TEMP.	2	2700 K		
			3	3000 K		
	II(I)	COLORS	02		Black	
			03		White	
			101		Soft Pink	
			103		Soft Blue	
			104		Soft Green	
			124		Kaki	
140				Old Pink		
141				Terracotta Red		
142				Oxide Red		
111				Brass Finish		
112		Gold Finish				
137		Bronze Finish				
			RAL color on request			






SPACE 7 S

1298-BB-13-01-K-J-234H-II(I)

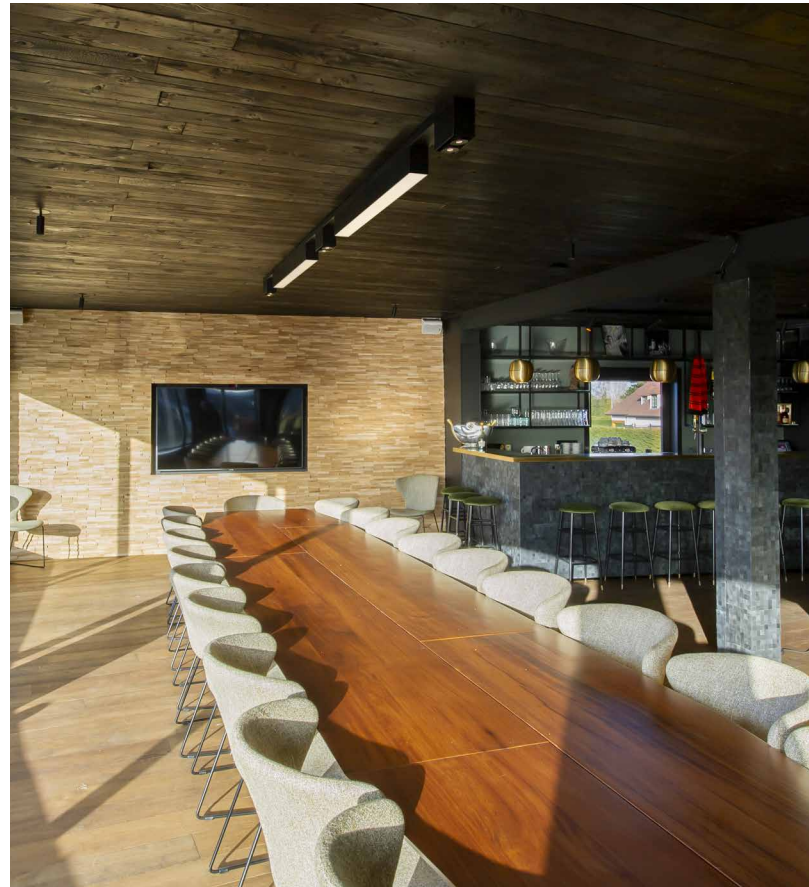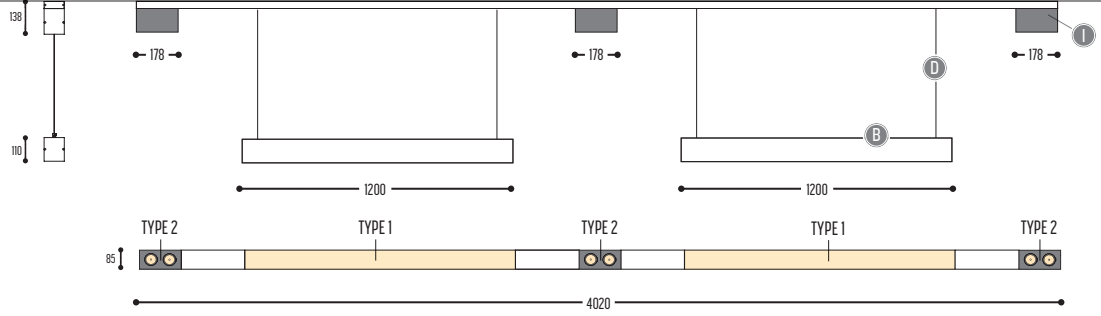





SPAZE 7
1295-BB-13-K-J-234H-II(I)

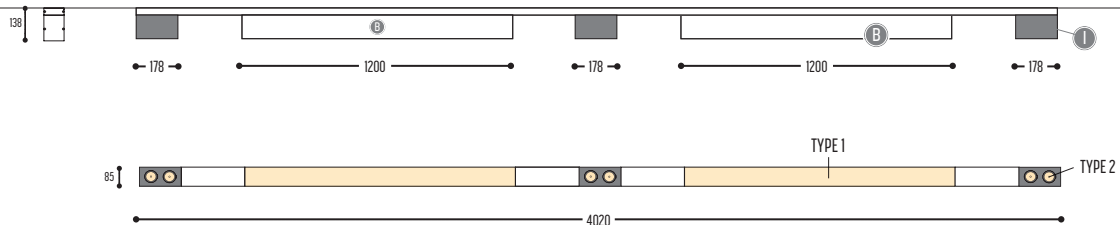

TYPE 1	BB	COLORS	02	Black
			03	White
	CC	LED	13	>90 CRI • 2x 3910 Lm / 25,9 W / 3000 K
	DD	SUSP. CABLE.	01	1,5 m
K	DRIVER	0	Non dimmable (intern)	
		2	Dimmable 1-10 V (intern)	
		3	Dali (intern)	
J	DIFFUSER	0	Opal	
		1	Prismatic	
TYPE 2	E	LED	2	>90 CRI • 6x 1000 Lm / 350 mA / 9 W
	GG	REFLECTOR	34	34°
	H	COLOR. TEMP.	2	2700 K
			3	3000 K
II(I)	COLORS	02	Black	
		03	White	
		101	Soft Pink	
		103	Soft Blue	
		104	Soft Green	
		124	Kaki	
		140	Old Pink	
		141	Terracotta Red	
		142	Oxide Red	
		111	Brass Finish	
112	Gold Finish			
137	Bronze Finish			
			RAL color on request	



SPAZE 9
1509-BB-13-K-J-234H-II(I)-N

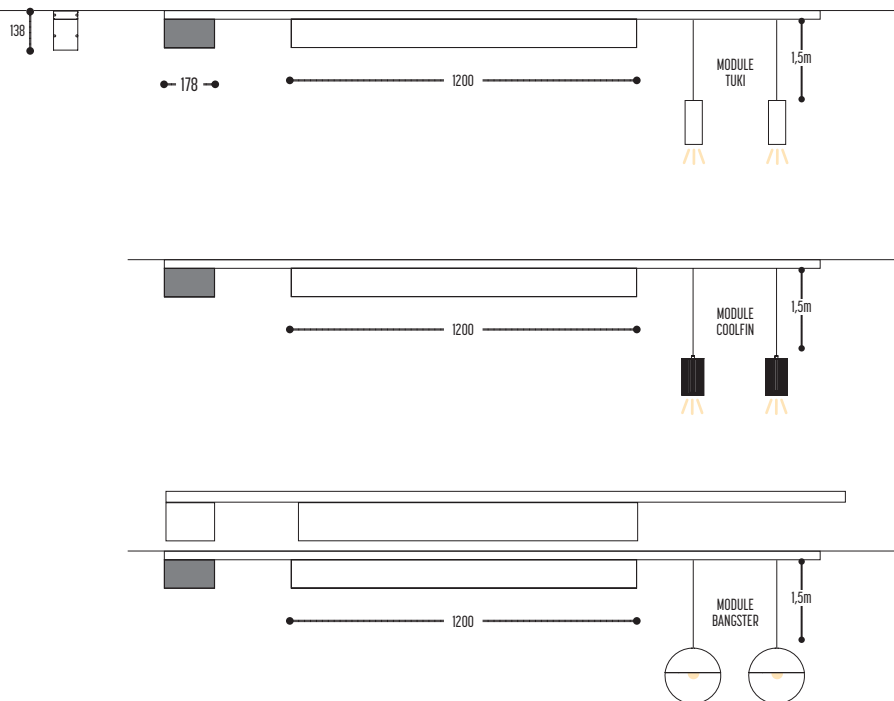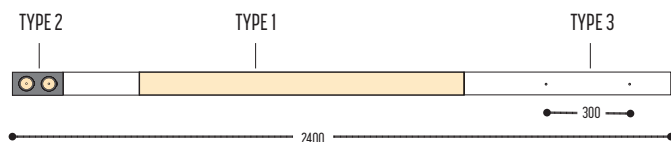


TYPE 1	BB	COLORS	02	Black
			03	White
	CC	LED	13	>90 CRI • 3910 Lm / 25,9 W / 3000 K
	K	DRIVER	0	Non dimmable (intern)
2			Dimmable 1-10 V (intern)	
3			Dali (intern)	
J	DIFFUSER	0	Opal	
		1	Prismatic	
TYPE 2	E	LED	2	>90 CRI • 2x 1000 Lm / 350 mA / 9 W
	GG	REFLECTOR	34	34°
			2	2700 K
	H	COLOR. TEMP.	3	3000 K
II(I)			COLORS	02
	03	White		
	101	Soft Pink		
	103	Soft Blue		
	104	Soft Green		
	124	Kaki		
	140	Old Pink		
	141	Terracotta Red		
	142	Oxide Red		
	111	Brass Finish		
	112	Gold Finish		
	137	Bronze Finish		
				RAL color on request
TYPE 3	N	MODULE TUKI	1	2x TUKI 60 S / Black 36° / 900 Lm
		MODULE COOLFIN	2	2x COOLFIN S / Black 40° / 1300 Lm
		MODULE BANGSTER	3	2x BANGSTER HOODY S - Ø200mm / Black / 600 Lm
		4	2x BANGSTER HOODY S - Ø200mm / Brass / 600 Lm	

PC-Alu









	BB	COLORS	02	Black	
			03	White	
	CC	LED	13	>90 CRI • 5866 Lm / 38,9 W / 3000 K	
TYPE 1	K	DRIVER	0	Non dimmable (intern)	
			2	Dimmable 1-10 V (intern)	
			3	Dali (intern)	
J	DIFFUSER	0	Opal		
		1	Prismatic		
E	LED	2	>90 CRI • 2x1000 Lm / 350 mA / 9 W		
GG	REFLECTOR	34	34°		
H	COLOR. TEMP.	2	2700 K		
		3	3000 K		
TYPE 2	II(I)	COLORS	02	Black	
			03	White	
			101	Soft Pink	
			103	Soft Blue	
			104	Soft Green	
			124	Kaki	
			140	Old Pink	
			141	Terracotta Red	
			142	Oxide Red	
			111	Brass Finish	
			112	Gold Finish	
			137	Bronze Finish	
					 RAL color on request
TYPE 3	N(N)	MODULE TWOCAN	5	2x TWOCAN ML / Black-Brass / 900 Lm	
			6	2x TWOCAN ML / White-White / 900 Lm	
		MODULE IJ-LAMP	7	2x IJ-LAMP / Brass / E27	
			8	2x IJ-LAMP / White / E27	
		MODULE BANGSTER	9	2x BANGSTER HOODY S - Ø300mm / White / 600 Lm	
			10	2x BANGSTER HOODY S - Ø300mm / Brass / 600 Lm	
11	2x BANGSTER HOODY S - Ø300mm / Black / 600 Lm				





PC-Alu



SPAZE 12
1512-BB-13-K-J-234H-II(I)-N(N)

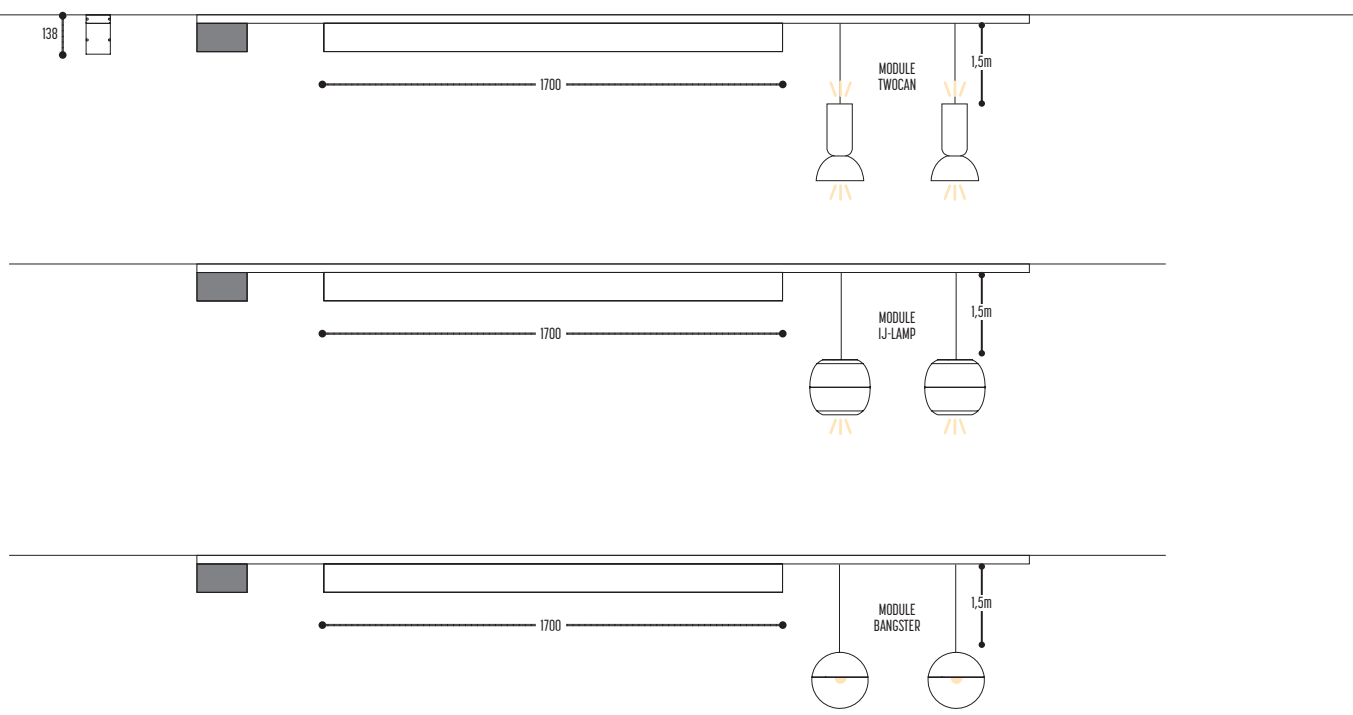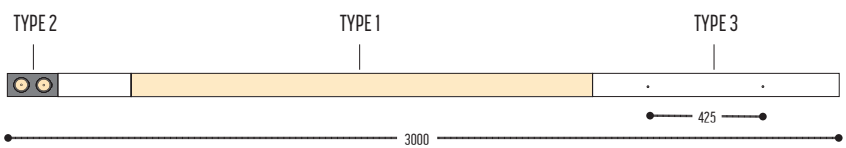


SPACE 11
1511-BB-13-K-J-234H-II(I)-N

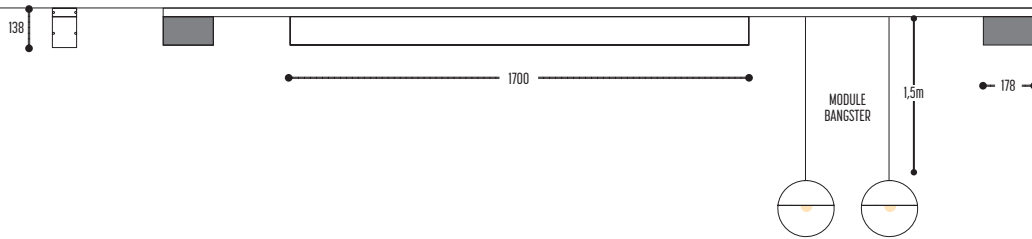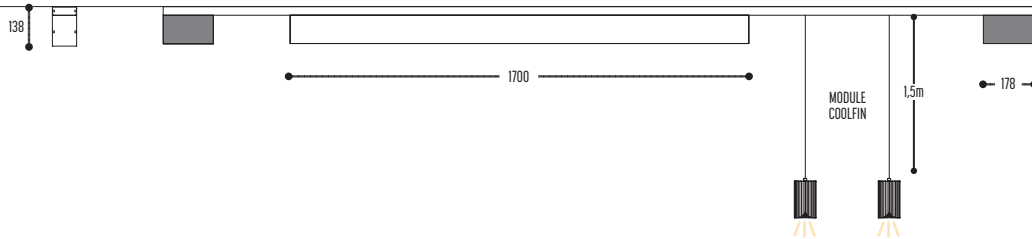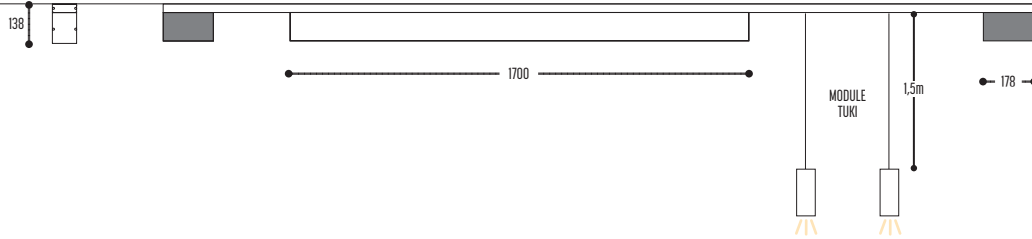





Argenta Izegem

TYPE 1	BB	COLORS	02	Black
			03	White
	CC	LED	13	>90 CRI • 5866 Lm / 38,9 W / 3000 K
	K	DRIVER	0	Non dimmable (intern)
2			Dimmable 1-10 V (intern)	
3			Dali (intern)	
J	DIFFUSER	0	Opal	
		1	Prismatic	
E	LED	2	>90 CRI • 4x 1000 Lm / 350 mA / 9 W	
GG	REFLECTOR	34	34°	
H	COLOR. TEMP.	2	2700 K	
		3	3000 K	
TYPE 2	III(I)	COLORS	02	Black
			03	White
			101	Soft Pink
			103	Soft Blue
			104	Soft Green
			124	Kaki
			140	Old Pink
			141	Terracotta Red
			142	Oxide Red
			111	Brass Finish
			112	Gold Finish
137	Bronze Finish			
 RAL color on request				
TYPE 3	N	MODULE TUKI	1	2x TUKI 60 S / Black 36° / 900 Lm
		MODULE COOLFIN	2	2x COOLFIN S / Black 40° / 1300 Lm
		MODULE BANGSTER	3	2x BANGSTER HOODY S - Ø200mm / Black / 600 Lm
		4	2x BANGSTER HOODY S - Ø200mm / Brass / 600 Lm	

PC-Alu



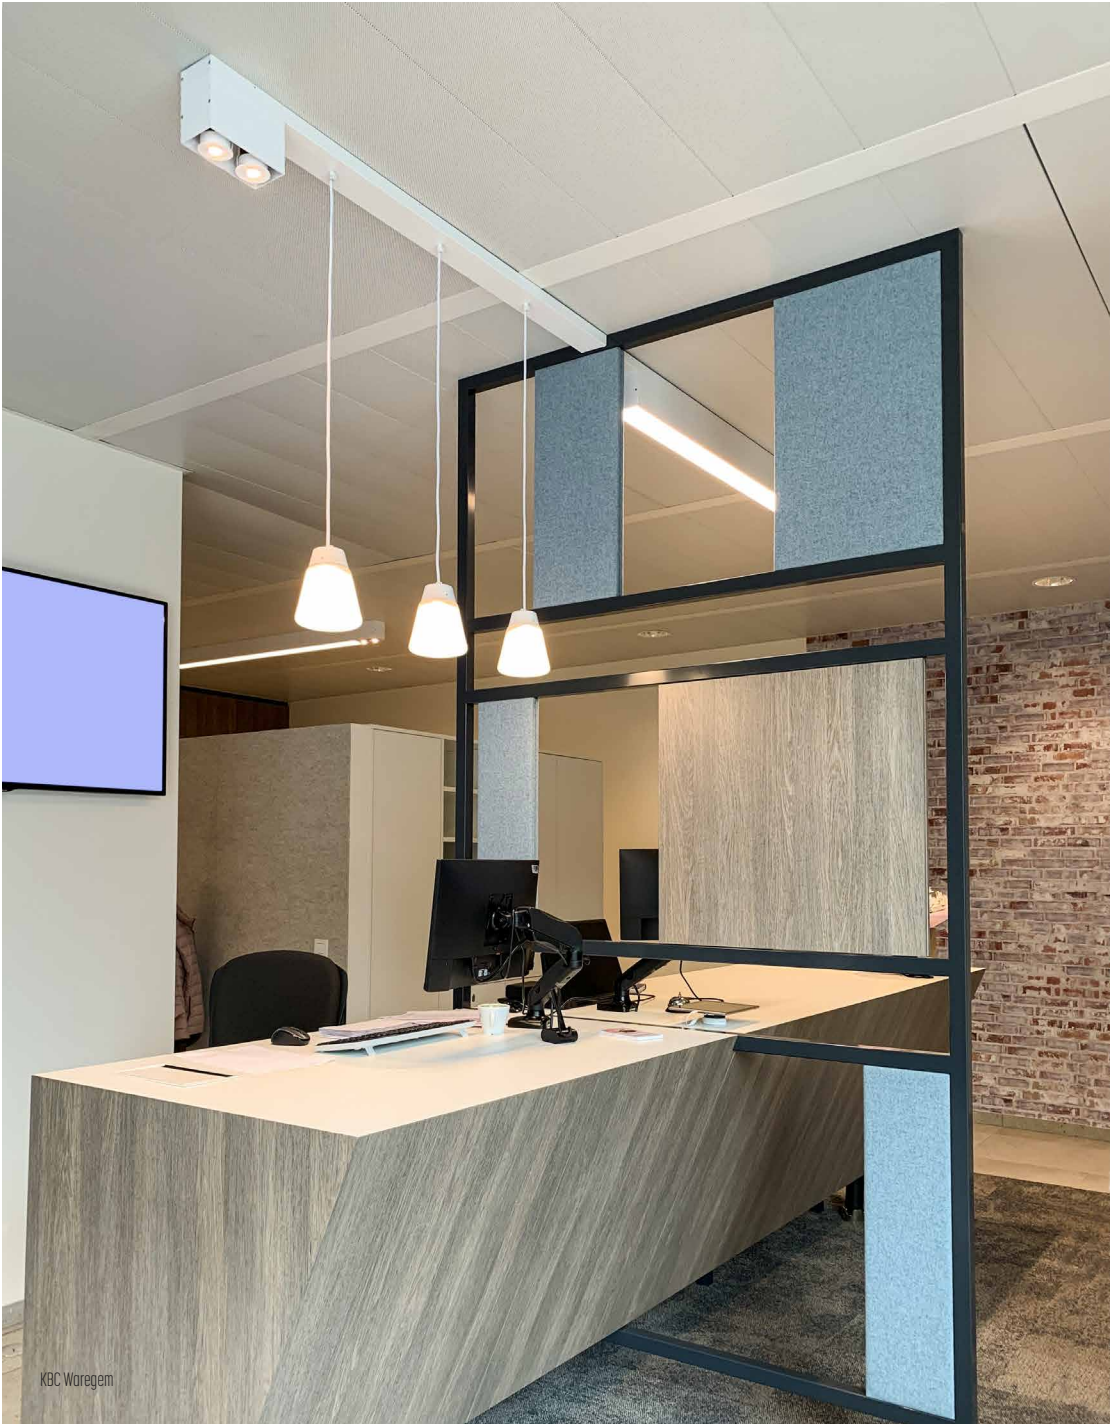

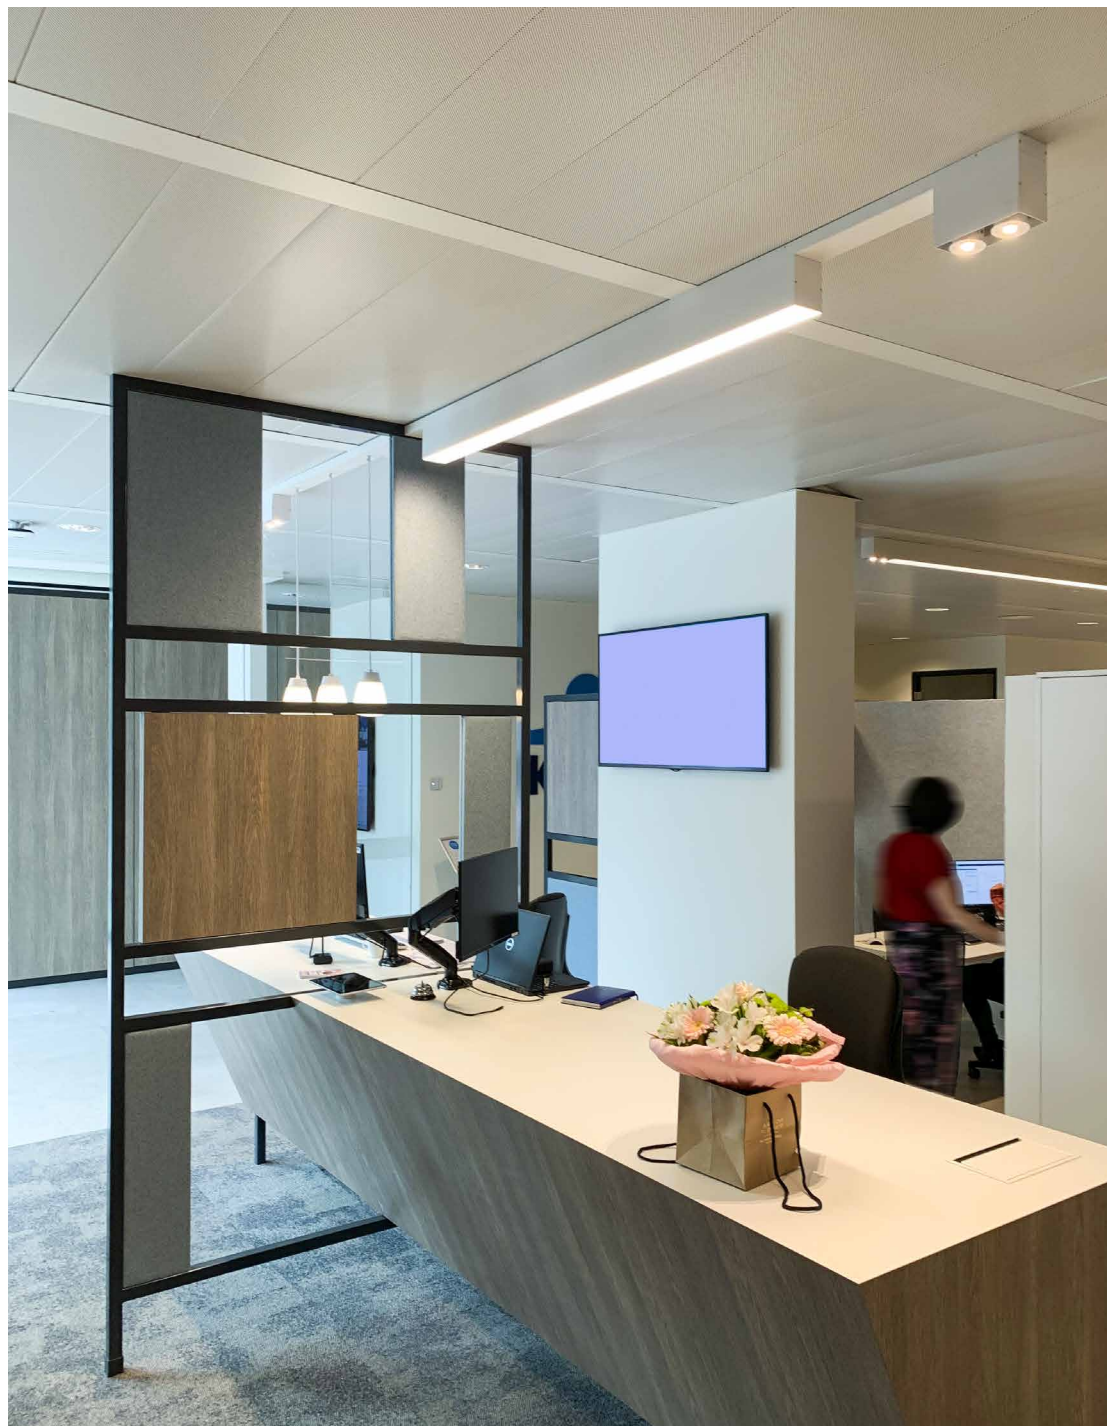


SPINE

design pieterjan for dark





SPINE
530-BB-8663-K-DD

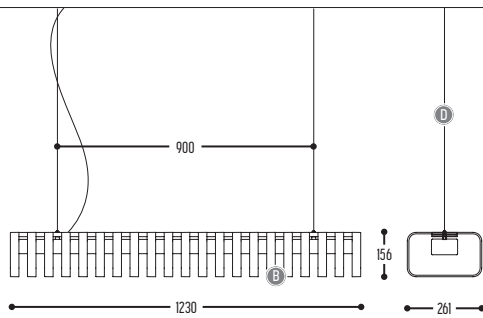


BB	COLOR BODY	02	Black
		03	White
EFF	CRI • LUMENOUTPUT	866	>85 CRI • 7640 Lm / 49,6 W
H	COLOR TEMP.	3	3000K
K	DRIVER	0	Non dimmable (intern)
		2	Dimmable 1-10 V (intern)
		3	Dali (intern)
DD	SUSP. CABLE	01	1,5 m
		02	2,5 m

PC-Alu




TALORE

design dark studio for dark

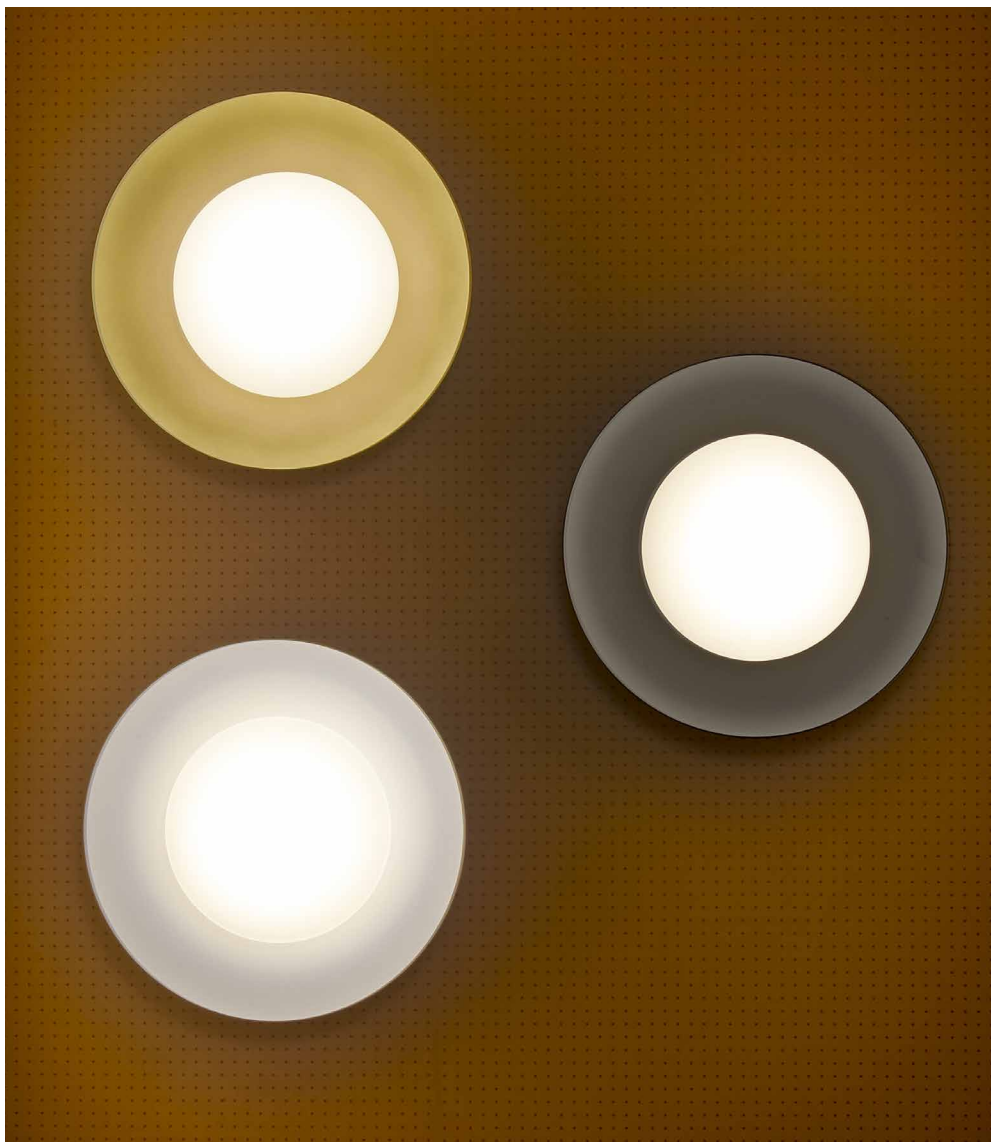



TALORE
2570-BB(B)-813003-K

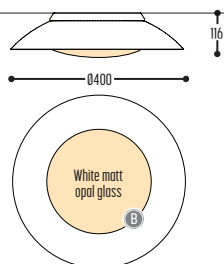

BB(B)	COLORS	02		Black	
		03		White	
		101		Soft Pink	
		103		Soft Blue	
		104		Soft Green	
		124		Kaki	
		140		Old Pink	
		141		Terracotta Red	
		142		Oxide Red	
		111		Brass Finish	
		112		Gold Finish	
		137		Bronze Finish	
					RAL color on request
EFF	CRI • LUMENOUTPUT	813	>80 CRI • 1350 Lm / 550 mA / 19 W		
GG	REFLECTOR	00	N.A.		
H	COLOR TEMP.	3	3000K		
K	DRIVER	1	No driver		
		0	Non dimmable (intern)		
		2	Dimmable 1-10 V (intern)		
		3	Dali (intern)		

on request: incl. emergency unit 1h + incl emergency battery

Glass - Alu




TAQI

design dark studio for dark



TAQI BOX 1
2700-BB-906603-K

TAQI SET 1
2701-BB-906603-K

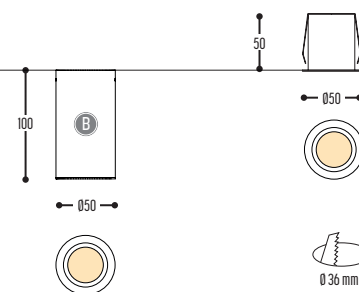


BB	COLORS	02		Black	
		03		White	
EFF	CRI • LUMENOUTPUT	906	>90 CRI • 455 Lm / 700 mA / 6,5 W		
GG	REFLECTOR	60	60°		
H	COLOR TEMP.	3	3000K		
K	DRIVER	1	No driver		
		0	Non dimmable (intern)		
		2	Dimmable 1-10 V (extern)		
		3	Dali (extern)		
		4	Phase cut (extern)		




TIKI


design dark studio for dark



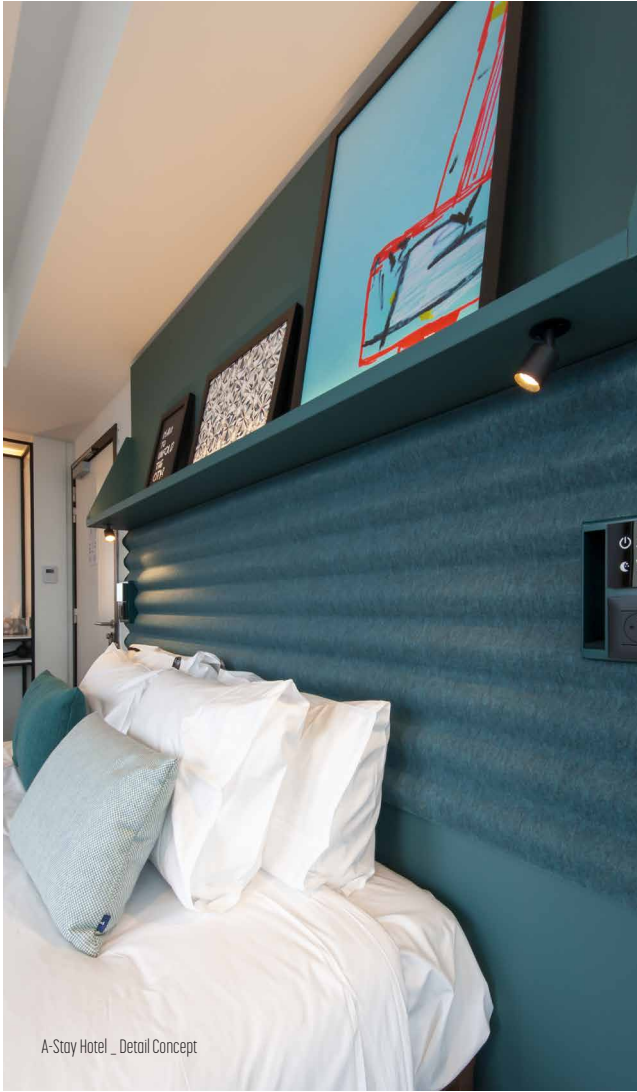

A-Stay Hotel _ Detail Concept

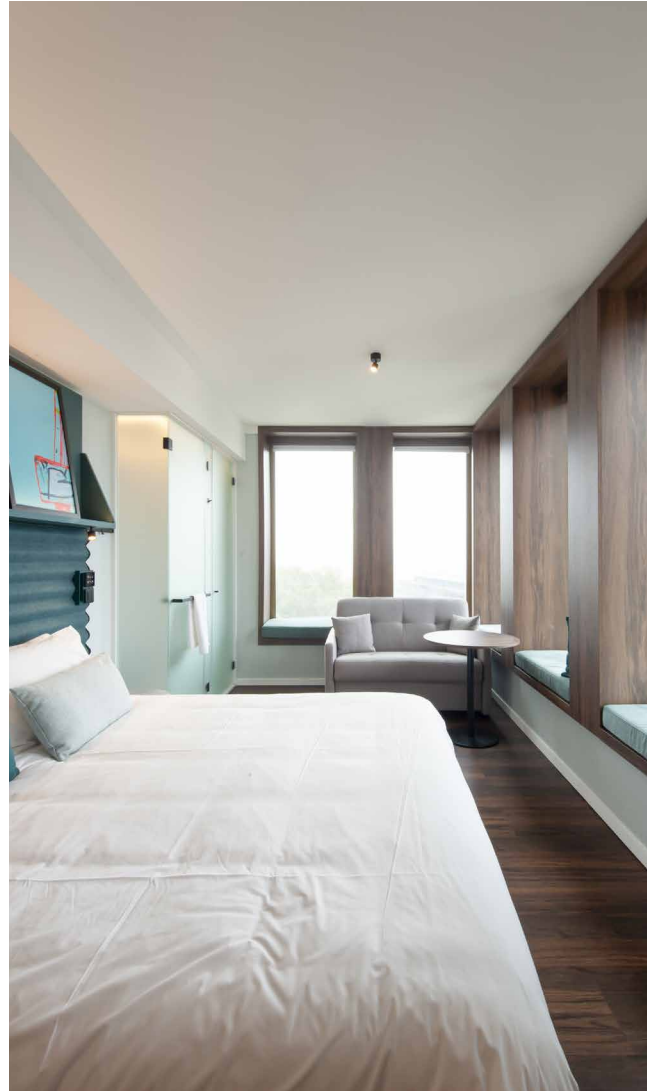

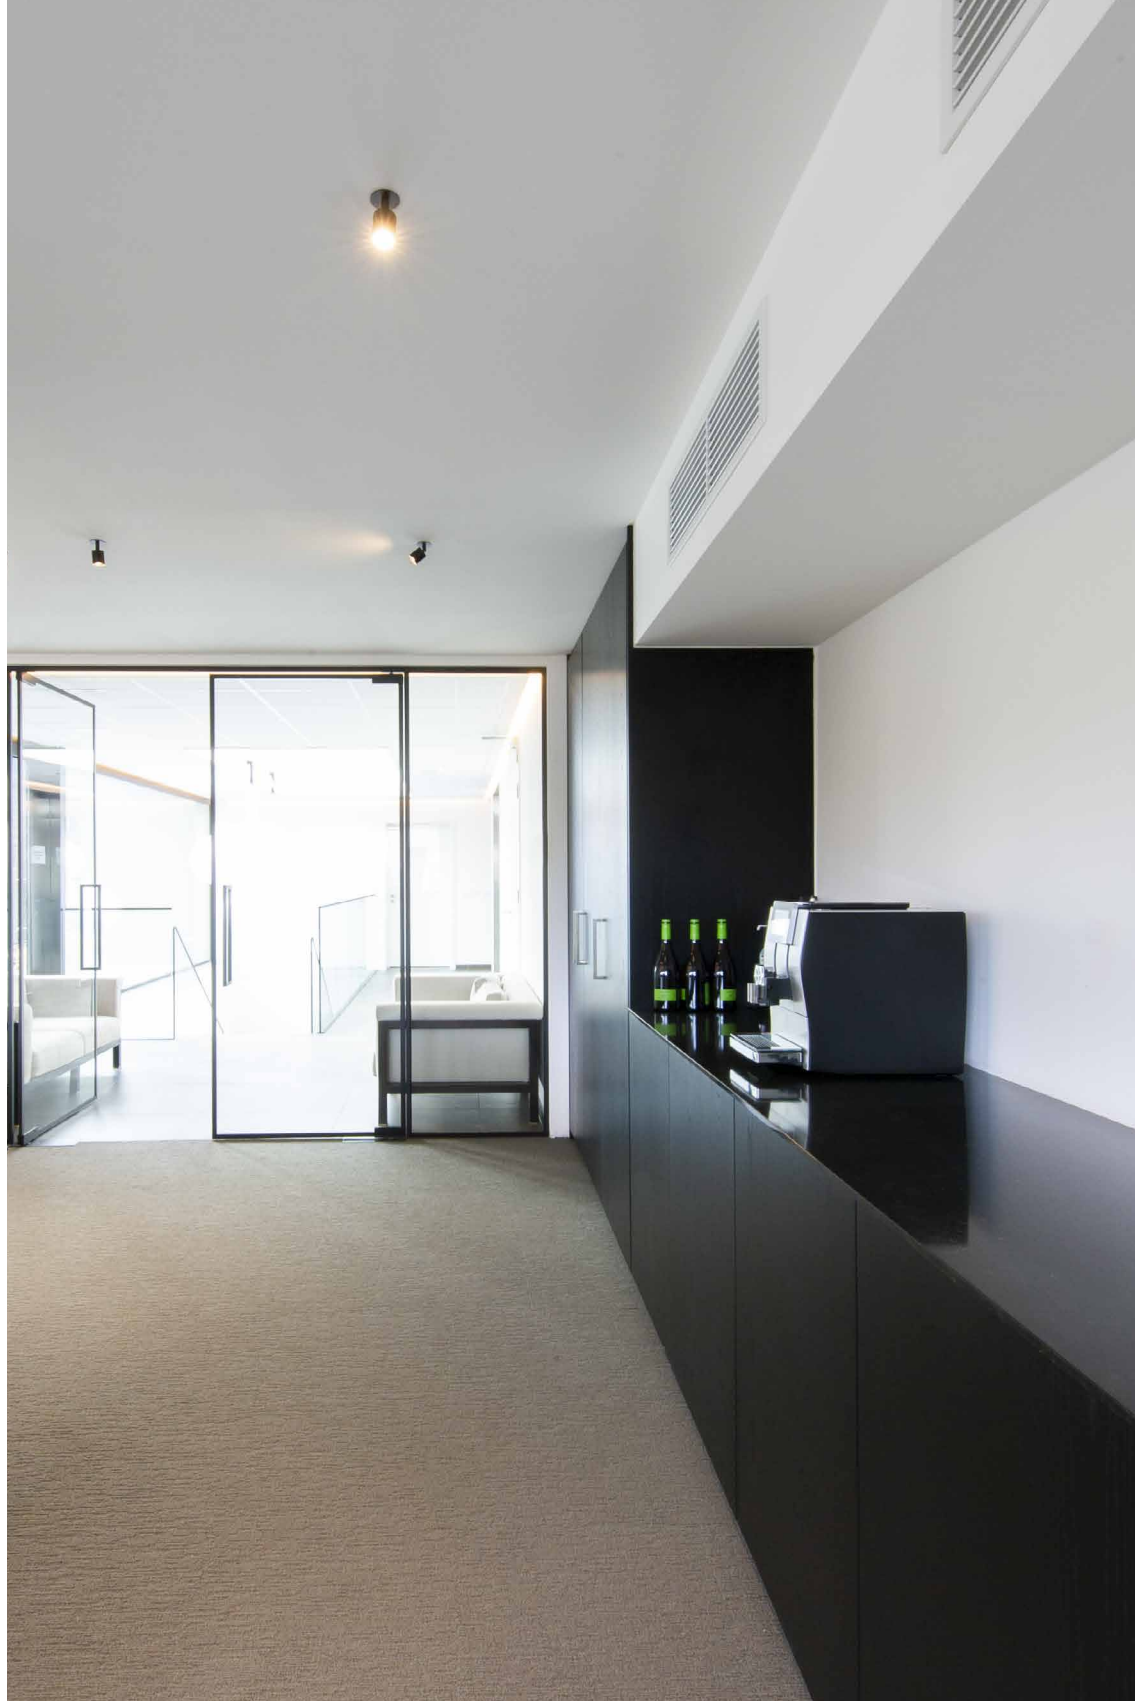





Le relais des Oliviers _ Bossuyt Shop Interiors




TIKI BOX 1
2029-BB-906GGH-I-K




TIKI BOX 2
2030-BB-906GGH-I-K

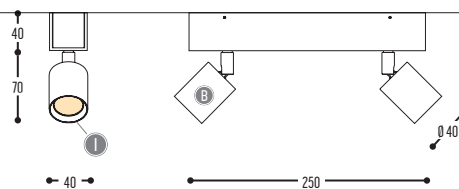


TIKI SET 1 / 50
2035-BB-906GGH-I-K



TIKI SET 1 / 90
2036-BB-906GGH-I-K



TIKI SET 2
2038-BB-906GGH-I-K

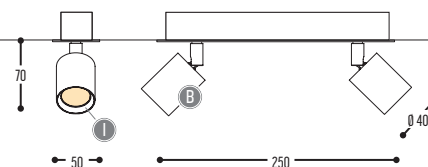


BB	COLORS	02	Black
		03	White
EFF	CRI • LUMENOUTPUT	906	>90 CRI • 600 Lm / 350 mA / 6,4 W
		22	22°
		34	34°
GG	REFLECTOR	54	54°
		2	2700K
		3	3000K
H	COLOR TEMP.	4	4000K
		W	White
I	INSIDE COLOR	B	Black
		G	Gold
		1	No driver
K	DRIVER	0	Non dimmable (extern) Except for TIKI BOX 1 (intern)
		2	Dimmable 1-10 V (extern)
		3	Dali (extern) Except for TIKI BOX 2 (intern)
		4	Phase cut (extern)

Alu





TIKI FIX
2050-BB(B)-906GGH-I-K



BB(B)	COLORS	02		Black	
		03		White	
		112		Gold Finish	
					RAL color on request
EFF	CRI • LUMENOUTPUT	906	>90 CRI • 600 Lm / 350 mA / 6,4 W		
		GG	REFLECTOR	22	22°
				34	34°
54	54°				
H	COLOR TEMP.	2	2700K		
		3	3000K		
		4	4000K		
		I	COLOR DETAIL	W	
B				Black	
G				Gold	
K	DRIVER	1	No driver		
		0	Non dimmable (intern)		
		2	Dimmable 1-10 V (extern)		
		3	Dali (extern)		
		4	Phase cut (extern)		



TRAPPED

design sem de l'anverre & kris henkens for dark




DESIGNPREIS
2009

NOMINIERT




USA 2007

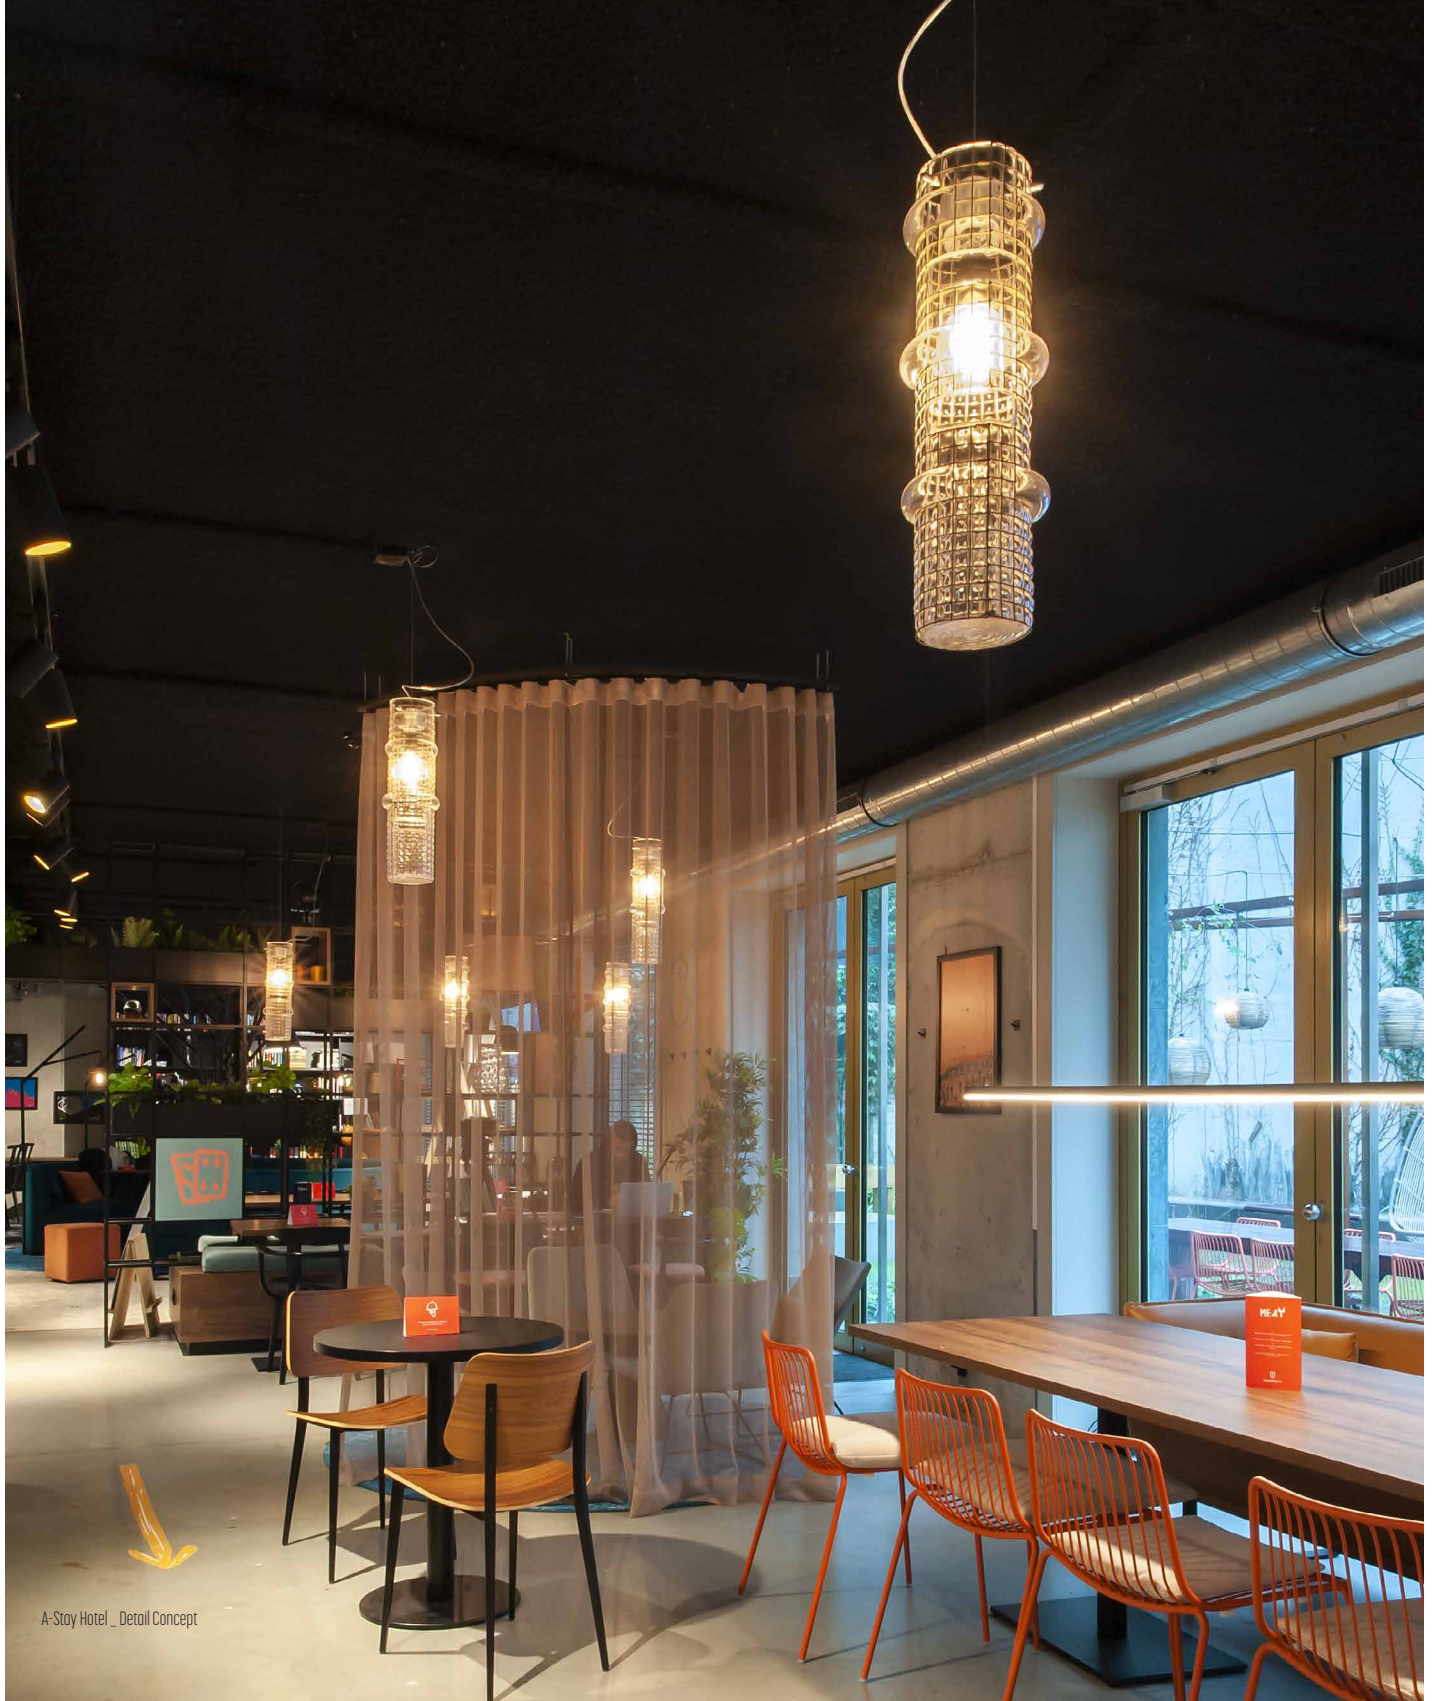

A-Stay Hotel _ Detail Concept

TRAPPED
260-BB-001-DD



BB	COLORS	00	Clear
		13	Milky
CCC	TYPE E27	001	LED / Globe (MAX 12 W)
DD	SUSP. CABLE	01	1,5 m
		02	2,5 m

Glass - Alu




TUKI 40

design dark studio for dark






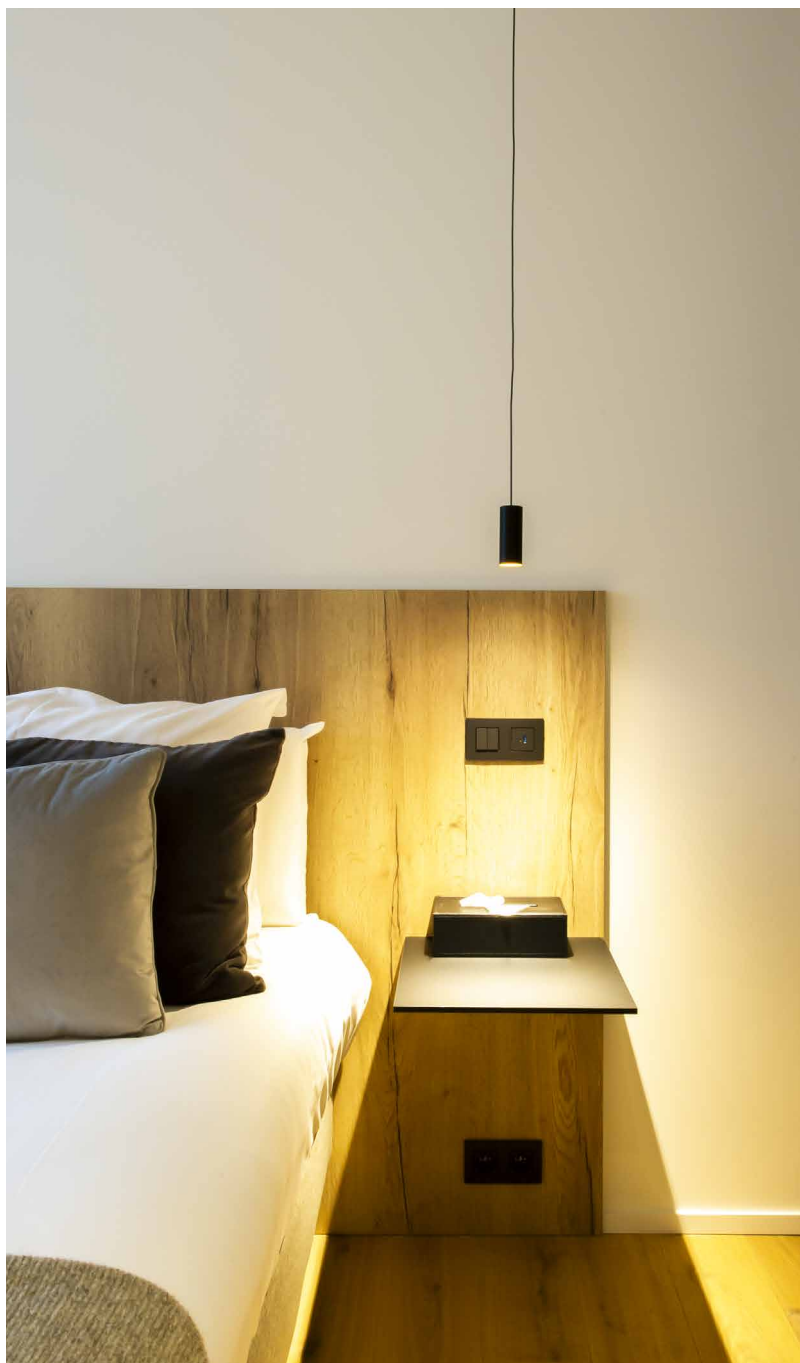

TUKI 40S

1342-BB(B)-906GGH-DD-I-K



BB(B)	COLORS	02		Black
		03		White
		112		Gold Finish
EFF	CRI • LUMENOUTPUT	906	>90 CRI • 600 Lm / 350 mA / 6,4 W	
		22	22°	
		34	34°	
GG	REFLECTOR	54	54°	
		2	2700K	
		3	3000K	
H	COLOR TEMP.	4	4000K	
		01	1,5 m	
		02	2,5 m	
I	INSIDE COLOR	W		White
		B		Black
		G		Gold
K	DRIVER	1	No driver	
		0	Non dimmable (intern)	
		2	Dimmable 1-10 V (intern)	
		3	Dali (intern)	
		4	Phase cut (intern)	

Alu






Biboo _ Signature Design Concepts







TUKI 40
1340-BB-906GGH-I-K




TUKI 40 BOX 2
2091-BB-906GGH-I-K

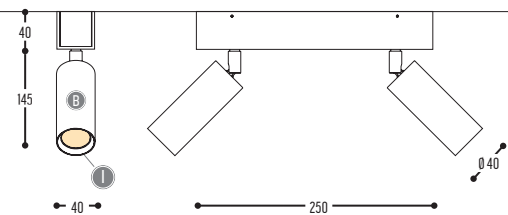


TUKI 40 SET 1/50
1353-BB-906GGH-I-K



TUKI 40 SET 1/90
1343-BB-906GGH-I-K



TUKI 40 SET 2
2081-BB-906GGH-I-K

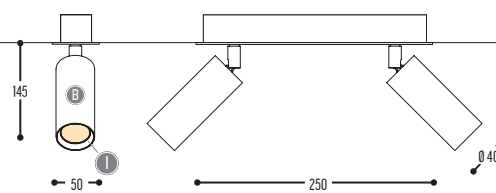


BB	COLORS	02	Black
		03	White
EFF	CRI • LUMENOUTPUT	906	>90 CRI • 600 Lm / 350 mA / 6,4 W
GG	REFLECTOR	22	22°
		34	34°
		54	54°
H	COLOR TEMP.	2	2700K
		3	3000K
		4	4000K
I	INSIDE COLOR	W	White
		B	Black
		G	Gold
K	DRIVER	1	No driver
		0	Non dimmable (extern)
		2	Dimmable 1-10 V (extern)
		3	Dali (extern)
		4	Phase cut (extern)

Except
TUKI 40 BOX2
(intern)





TUKI 40 FIX
1357-BB(B)-906GGH-I-K

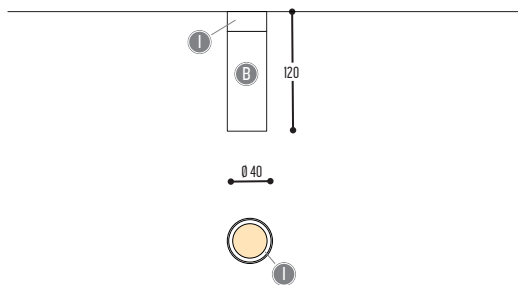


BB(B)	COLORS	02		Black
		03		White
		112		Gold Finish
			RAL color on request	
EFF	CRI • LUMENOUTPUT	906	>90 CRI • 600 Lm / 350 mA / 6,4 W	
GG	REFLECTOR	22	22°	
		34	34°	
		54	54°	
H	COLOR TEMP.	2	2700K	
		3	3000K	
		4	4000K	
I	COLOR DETAIL	W		White
		B		Black
		G		Gold
K	DRIVER	1	No driver	
		0	Non dimmable (intern)	
		2	Dimmable 1-10 V (extern)	
		3	Dali (extern)	
		4	Phase cut (extern)	

Alu







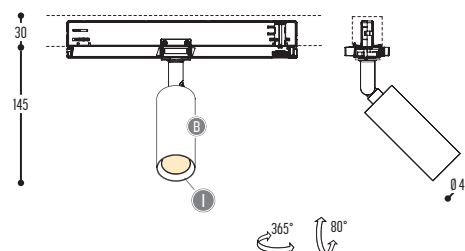


TUKI 40 TRACK
1341-BB-906GGH-I-0



TRACK RAIL: to be ordered separately
Compatible with EUTRAC, GLOBAL & POWERGEAR

BB(B)	COLORS	02		Black
		03		White
EFF	CRI • LUMENOUTPUT	906	>90 CRI • 600 Lm / 350 mA / 6,4 W	
GG	REFLECTOR	22	22°	
		34	34°	
		54	54°	
H	COLOR TEMP.	2	2700K	
		3	3000K	
		4	4000K	
I	INSIDE COLOR	W		White
		B		Black
		G		Gold
K	DRIVER	0	Non dimmable (intern)	
		3	Dali (extern)	

Alu



TUKI 60


design dark studio for dark





The Jane Table _ Photo Piet Albert Goethals



TUKI 60
1347-BB-907GGH-I-K

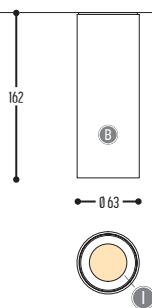

TUKI 60 MOVE
1345-BB-907GGH-I-K

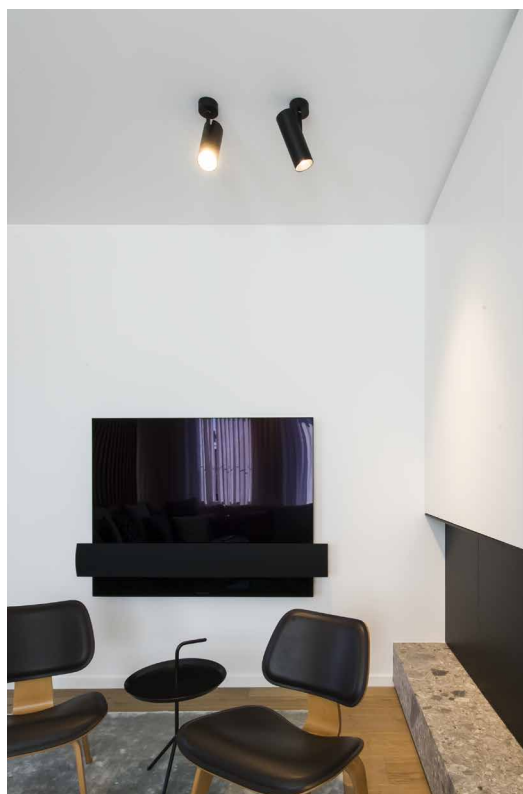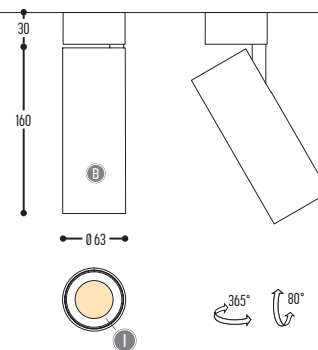


BB	COLORS	02	Black
		03	White
EFF	CRI • LUMENOUTPUT	907	>90 CRI • 895 Lm / 350 mA / 15 W
GG	REFLECTOR	11	11°
		20	20°
		34	34°
H	COLOR TEMP.	2	2700K
		3	3000K
I	INSIDE COLOR	W	White
		B	Black
		G	Gold
K	DRIVER	0	Non dimmable (intern)
		4	Phase cut (intern)





TUKI 60S
1349-BB-907GGH-DD-I-K




BB	COLORS	02	Black
		03	White
EFF	CRI • LUMENOUTPUT	907	>90 CRI • 895 Lm / 350 mA / 15 W
		11	11°
		20 34	20° 34°
GG	REFLECTOR	2	2700K
		3	3000K
		4	4000K
DD	SUSP. CABLE	01	1,5 m
		02	2,5 m
I	INSIDE COLOR	W	White
		B	Black
		G	Gold
K	DRIVER	0	Non dimmable (intern)
		4	Phase cut (intern)





Alu






TUKI 60 WALL
2020-BB-90600H-K



BB(B)	COLORS	02		Black
		03		White
		112		Gold Finish
			RAL color on request	
EFF	CRI • LUMENOUTPUT	906	>90 CRI • 2X 600 Lm / 350 mA / 6,4 W	
GG	REFLECTOR	00	N.A.	
		2	2700K	
		3	3000K	
H	COLOR TEMP.	4	4000K	
K	DRIVER	1	No driver	
		0	Non dimmable (intern)	
		2	Dimmable 1-10 V (extern)	
		3	Dali (extern)	
		4	Phase cut (intern)	


Alu



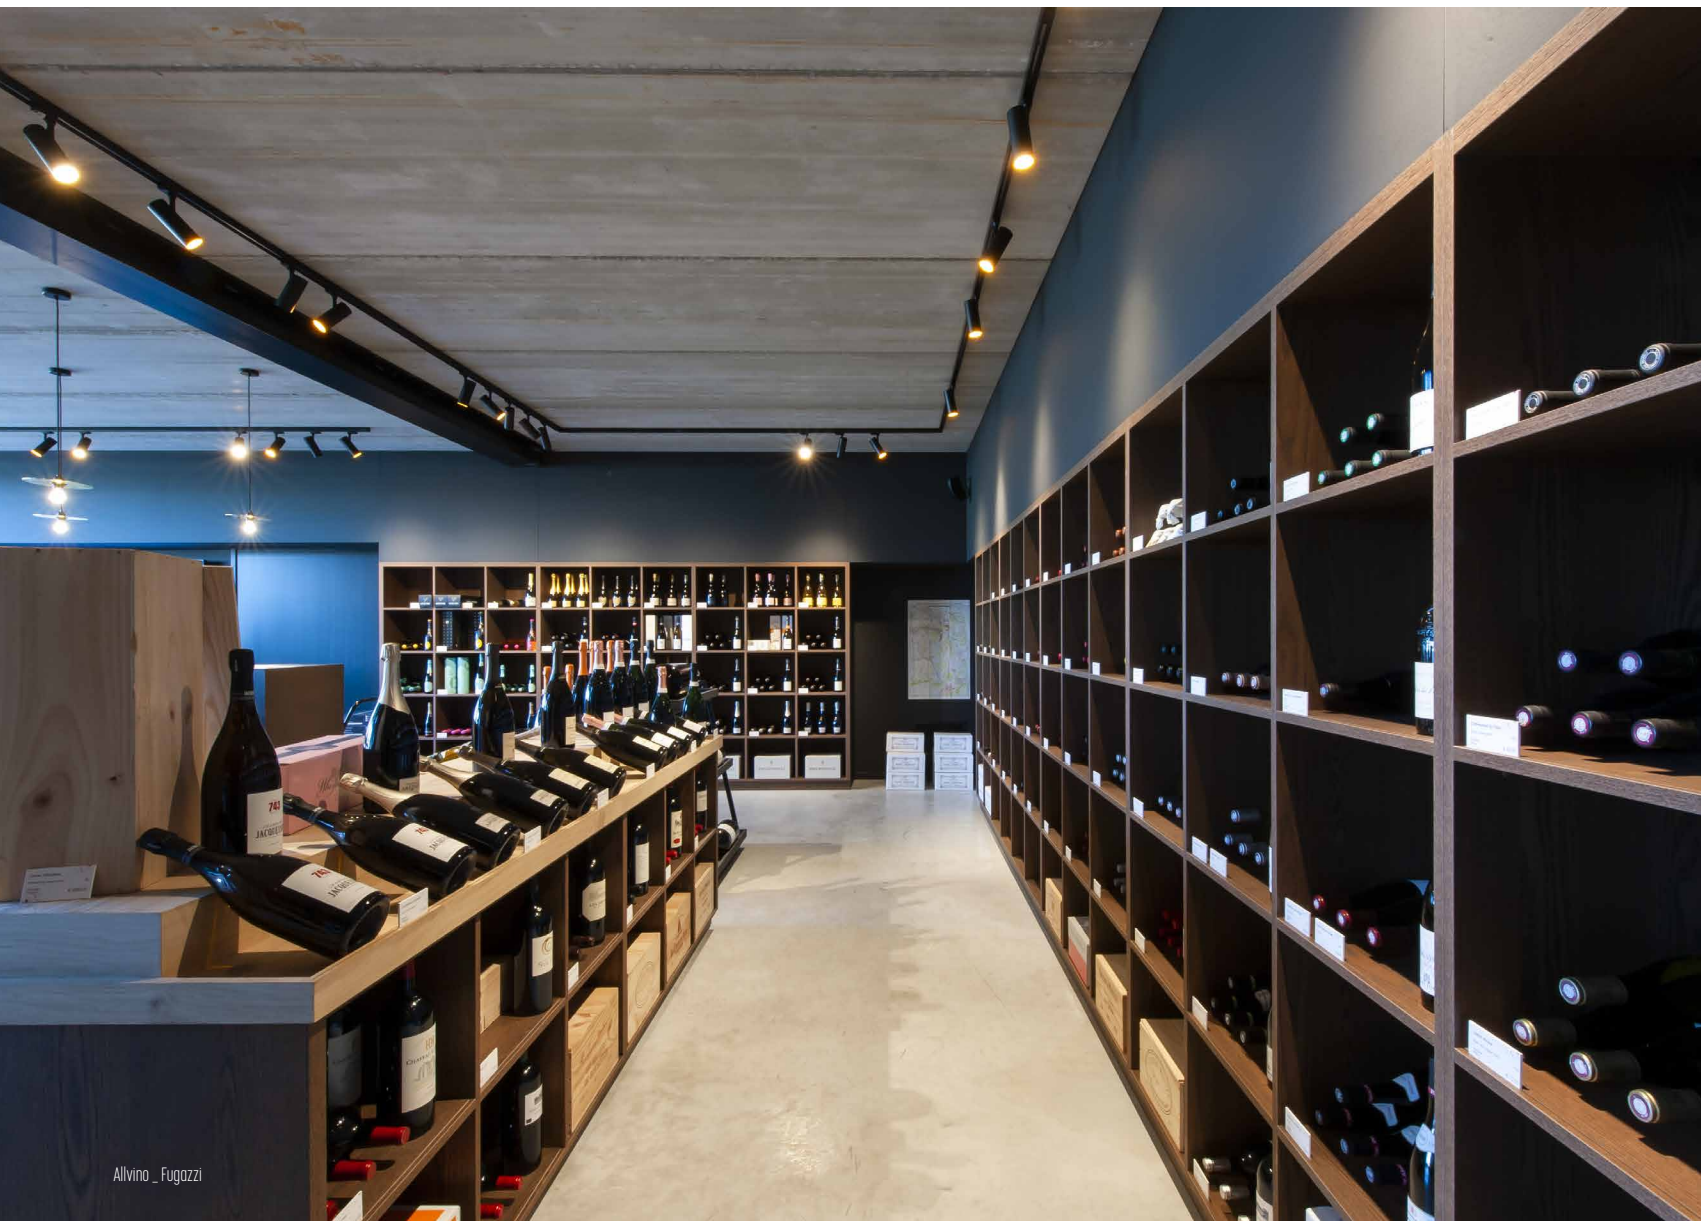





The Motel

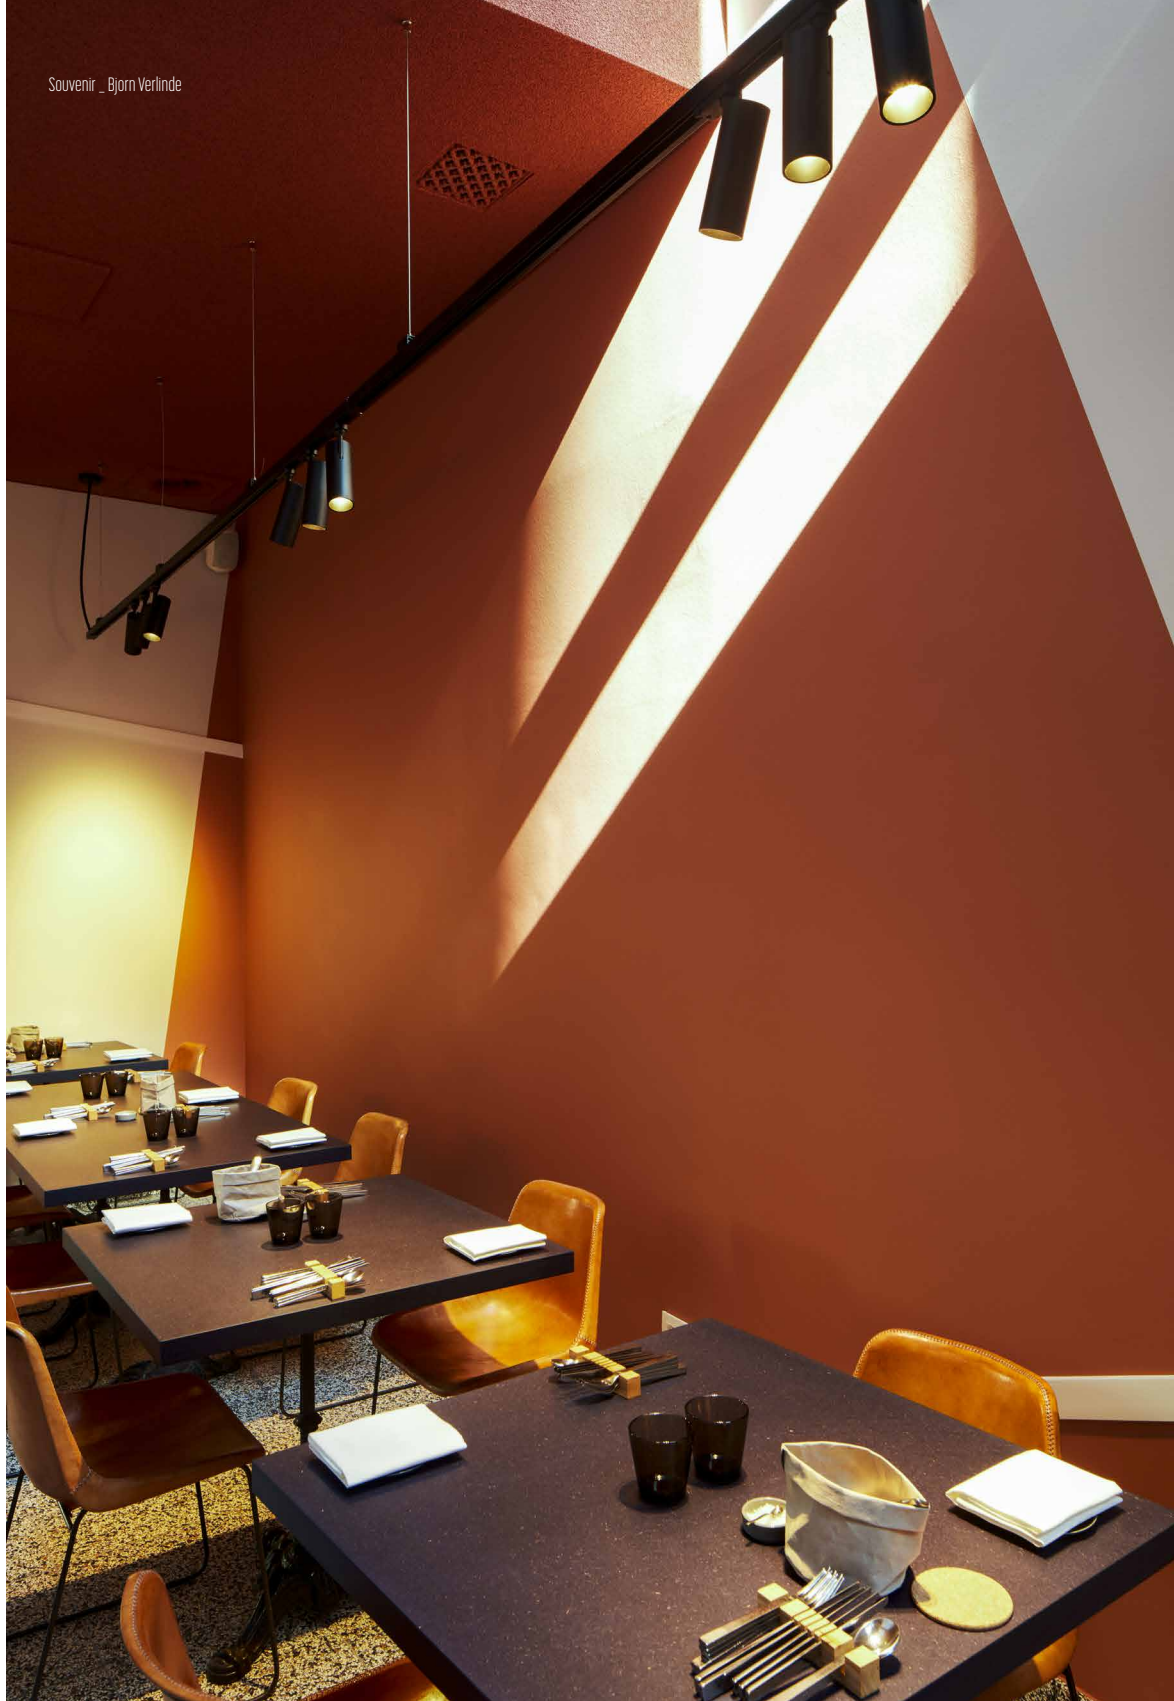

TUKI 60 TRACK
1346-BB-907GGH-I-K



TRACK RAIL: to be ordered separately
Compatible with EUTRAC, GLOBAL & POWERGEAR

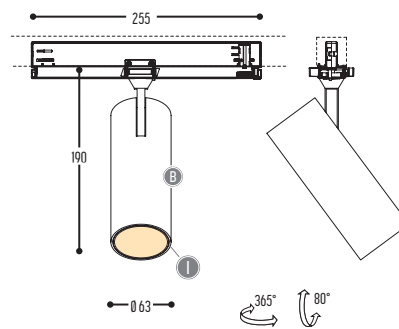

DALI - version

TRACK RAIL: to be ordered separately
Compatible with GLOBAL & POWERGEAR

BB(B)	COLORS	02	Black
		03	White
EFF	CRI • LUMENOUTPUT	907	>90 CRI • 895 Lm / 350 mA / 15 W
GG	REFLECTOR	11	11°
		20	20°
		34	34°
H	COLOR TEMP.	2	2700K
		3	3000K
I	INSIDE COLOR	W	White
		B	Black
		G	Gold
K	DRIVER	0	Non dimmable (intern)
		3	Dali (intern)
		4	Phase cut (intern)



TUKI 75


design dark studio for dark









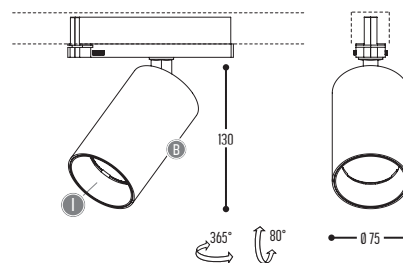

TUKI 75 TRACK
1351-BB-EFFGGH-I-K



TRACK RAIL: to be ordered separately
Compatible with GLOBAL & POWERGEAR


BB(B)	COLORS	02	 Black
		03	 White
EFF	CRI • LUMENOUTPUT	918	>90 CRI • 1825 Lm / 600 mA / 24 W
		927	>90 CRI • 2700 Lm / 900 mA / 36 W
GG	REFLECTOR	24	24°
		34	34°
		40	40°
H	COLOR TEMP.	2	2700K
		3	3000K
I	INSIDE COLOR	B	 Black
		G	 Gold
K	DRIVER	0	Non dimmable (intern)
		3	Dali (intern)

Alu



12-25

design co twee for dark

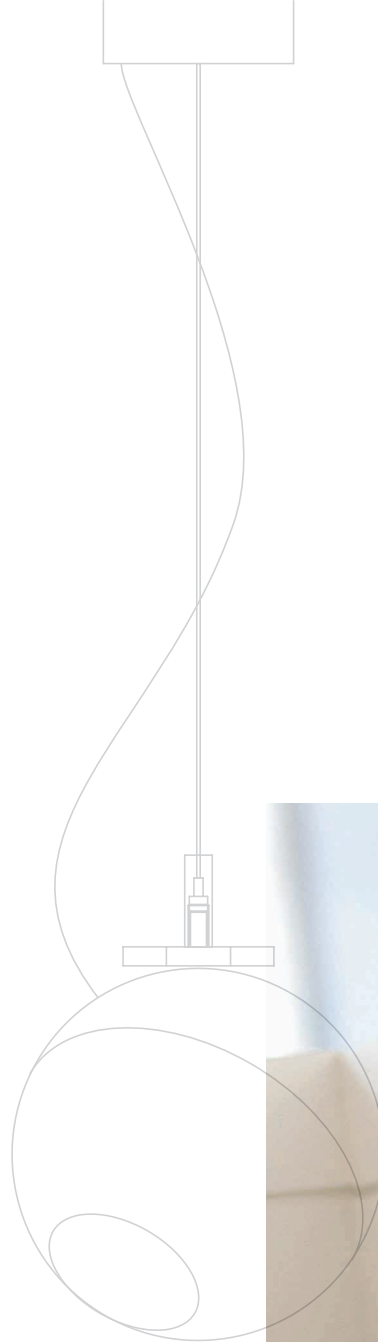

reddot design award
winner 2003



Designpreis der
Bundesrepublik
Deutschland
Nominert 2004
























12-25 S

402-BB(B)-CCC-DD
402-BB(B)-EFFGGH-DD-K



— 160 —

12-25 S2


404-BB(B)-CCC-DD
404-BB(B)-EFFGGH-DD-K



— 160 —


12-25 CLUB3

455-BB(B)-CCC-DD
455-BB(B)-EFFGGH-DD-K

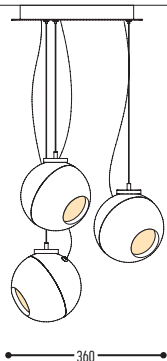


12-25 CLUB5

456-BB(B)-CCC-DD
456-BB(B)-EFFGGH-DD-K

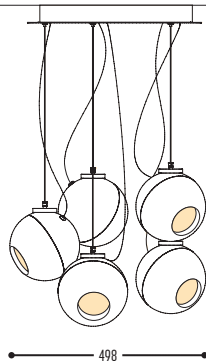

12-25 4P

444-BB(B)-CCC-01
444-BB(B)-EFFGGH-01-K

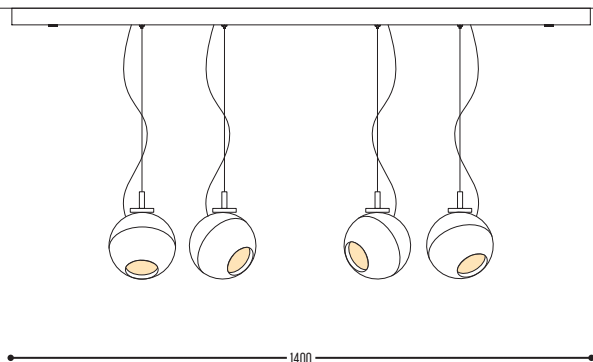

BB(B)	COLORS	02		Black	
		03		White	
		101		Soft Pink	
		103		Soft Blue	
		104		Soft Green	
		124		Kaki	
		140		Old Pink	
		141		Terracotta Red	
		142		Oxide Red	
		111		Brass Finish	
		112		Gold Finish	
		137		Bronze Finish	
					RAL color on request

CCC	TYPE		060		E27	LED QPAR20 (MAX 20 W)
			065		GU10	LED QPAR5i (MAX 20 W)

EFF	CRI • LUMENOUTPUT	915	>90 CRI • 1500 Lm / 350 mA / 11,6 W		
		GG	REFLECTOR	20 20°	40 40°
H	COLOR TEMP.	2	2700K		
		3	3000K		
		4	4000K		

DD	SUSP. CABLE	01	1,5 m	
		02	2,5 m	


K	LED	1	No driver	
		0	Non dimmable (intern)	
		2	Dimmable 1-10 V (intern)	Except for 12-25 S2 (extern)
		3	Dali (intern)	



Ceiling base standard matt white on request other colors possible


12-25 BASIC

401-BB(B)-CCC-00
401-BB(B)-EFFGGH-00-K




12-25 BOX 1

403-BB(B)-CCC-00
403-BB(B)-EFFGGH-00-K




12-25 BOX 2

421-BB(B)-CCC-00
421-BB(B)-EFFGGH-00-K




12-25 BOX 3

431-BB(B)-CCC-00
431-BB(B)-EFFGGH-00-K




12-25 SET 1


400-BB(B)-CCC-00
400-BB(B)-EFFGGH-00-K




12-25 SET 2
420-BB(B)-CCC-00
420-BB(B)-EFFGGH-00-K



12-25 SET 3
430-BB(B)-CCC-00
430-BB(B)-EFFGGH-00-K




12-25 MALAGA 1
408-BB(B)-CCC-00
408-BB(B)-EFFGGH-00-K



Plasterkit order separately: 290-1408-027651

12-25 MALAGA 2
422-BB(B)-CCC-00
422-BB(B)-EFFGGH-00-K



Plasterkit order separately: 290-1408-027652


BB(B)	COLORS	02		Black		
		03		White		
		101		Soft Pink		
		103		Soft Blue		
		104		Soft Green		
		124		Kaki		
		140		Old Pink		
		141		Terracotta Red		
		142		Oxide Red		
		111		Brass Finish		
		112		Gold Finish		
		137		Bronze Finish		
				RAL color on request		
CCC	TYPE		060		E27	LED QPAR20 (MAX 20 W)
			065		GU10	LED QPAR51 (MAX 20 W)
EFF	CRI • LUMENOUTPUT	915	>90 CRI • 1500 Lm / 350 mA / 11,6W			
GG	REFLECTOR	20	20°			
		40	40°			
		60	60°			
H	COLOR TEMP.	2	2700K			
		3	3000K			
		4	4000K			
K	DRIVER	1	No driver			
		0	Non dimmable (extern)			
		2	Dimmable 1-10 V (extern)			
		3	Dali (extern)			




Lampbase is standard matt black for all spheres; matt white for white spheres.




12-25 TRACK S
462-BB(B)-CCC-DD




12-25 TRACK S LED
462-BB(B)-EFFGGH-DD-K



12-25 TRACK
461-BB(B)-CCC-00



12-25 TRACK LED
461-BB(B)-EFFGGH-00-K



BB(B)	COLORS	02		Black		
		03		White		
		101		Soft Pink		
		103		Soft Blue		
		104		Soft Green		
		124		Kaki		
		140		Old Pink		
		141		Terracotta Red		
		142		Oxide Red		
		111		Brass Finish		
		112		Gold Finish		
		137		Bronze Finish		
					RAL color on request	
CCC	TYPE		060		E27	LED QPAR20 (MAX 20 W)
			065		GU10	LED QPAR51 (MAX 20 W)
EFF	CRI • LUMENOUTPUT	915	>90 CRI • 1500 Lm / 350 mA / 11,6W			
GG	REFLECTOR	20	20°			
		40	40°			
		60	60°			
H	COLOR TEMP.	2	2700K			
		3	3000K			
		4	4000K			
DD	SUSP. CABLE	01	1,5 m			
		02	2,5 m			
K	DRIVER	0	Non dimmable (intern)			
		3	Dali (intern)			



Track rail: to be ordered separately - check compatibility

TWERKIT


design skwon for dark



interior
innovation
award
2015
Selection






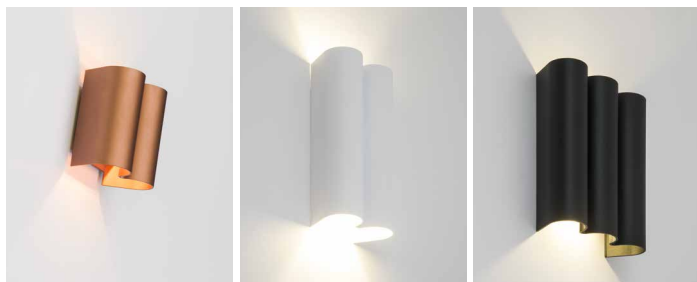


TWERKIT 2 JR

- IP20 1092-BB(B)-071-00
- IP20 1092-BB(B)-80500H-00-K
- IP44 1094-BB(B)-80500H-00-K




TWERKIT 2

- IP20 1090-BB(B)-071-00
- IP20 1090-BB(B)-80500H-00-K
- IP44 1095-BB(B)-80500H-00-K



TWERKIT 3

- IP20 1091-BB(B)-071-00
- IP20 1091-BB(B)-80500H-00-K
- IP44 1096-BB(B)-80500H-00-K



BB(B)	COLORS	02		Black	
		03		White	
		101		Soft Pink	
		103		Soft Blue	
		104		Soft Green	
		124		Kaki	
		140		Old Pink	
		141		Terracotta Red	
		142		Oxide Red	
		111		Brass Finish	
		112		Gold Finish	
		137		Bronze Finish	
					RAL color on request
		CCC	TYPE G9	071	
EFF	LED	TWERKIT 2 JR	805	>85 CRI • 2x300 Lm / 350 mA / 3 W	
		TWERKIT 2 TWERKIT 3	805	>85 CRI • 2x550 Lm / 700 mA / 6 W	
H	COLOR TEMP.	2	2700 K		
		3	3000 K		
		4	4000 K		
K	DRIVER	1	No driver		
		0	Non dimmable (intern)		
		2	Dimmable 1-10 V (intern)		
		3	Dali (intern)		

Alu-Steel



TWOCAN


design dark studio for dark









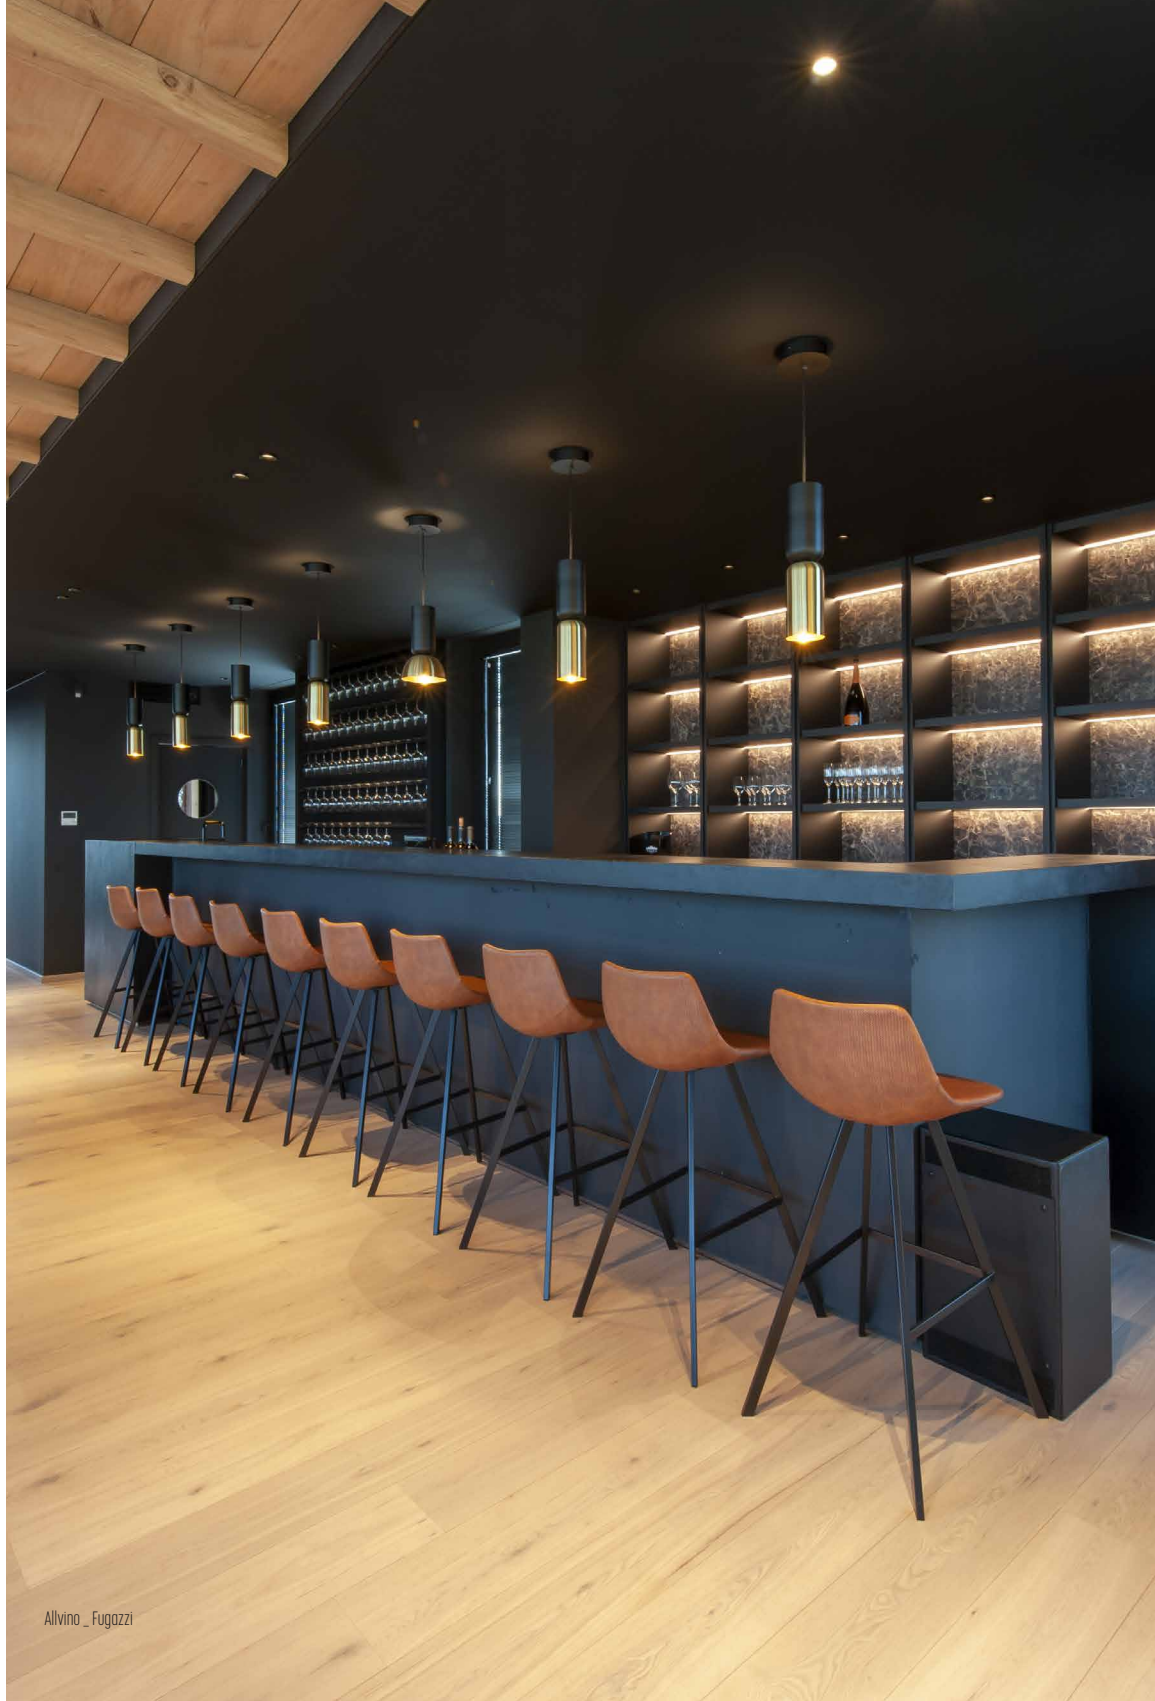







TWOCAN ML

2553-BB(B)-90400H-DD-II(I)-K




TWOCAN LM

2557-BB(B)-90400H-DD-II(I)-K




TWOCAN MS

2552-BB(B)-90400H-DD-II(I)-K




TWOCAN SM

2554-BB(B)-90400H-DD-II(I)-K




TWOCAN SL

2553-BB(B)-90400H-DD-II(I)-K




TWOCAN LS

2558-BB(B)-90400H-DD-II(I)-K




TWOCAN SS

2555-BB(B)-90400H-DD-II(I)-K





TWOCAN LL

2559-BB(B)-90400H-DD-II(I)-K



TWOCAN MM

2551-BB(B)-90400H-DD-II(I)-K



BB(B)	COLORS UPPER PART	02		Black
		03		White
		101		Soft Pink
		103		Soft Blue
		104		Soft Green
		124		Kaki
		140		Old Pink
		141		Terracotta Red
		142		Oxide Red
		110		Brass
		137		Bronze Finish
			RAL color on request	

EFF	CRI • LUMENOUTPUT	904	LED	>90 CRI • 2x 600 Lm / 350 mA / 6,4 W
H	COLOR TEMP.	1	2200 K	
		2	2700 K	
		3	3000 K	

DD	SUSP. CABLE	01	1,5 m	
		02	2,5 m	


II(I)	COLORS LOWEST PART	02		Black
		03		White
		101		Soft Pink
		103		Soft Blue
		104		Soft Green
		124		Kaki
		140		Old Pink
		141		Terracotta Red
		142		Oxide Red
		110		Brass
		137		Bronze Finish
			RAL color on request	

K	DRIVER	1	No driver	
		0	Non dimmable (intern)	
		2	Dimmable 1-10 V (intern)	
		3	Dali (intern)	
		4	Phase cut (intern)	




UPFO

design dark studio for dark

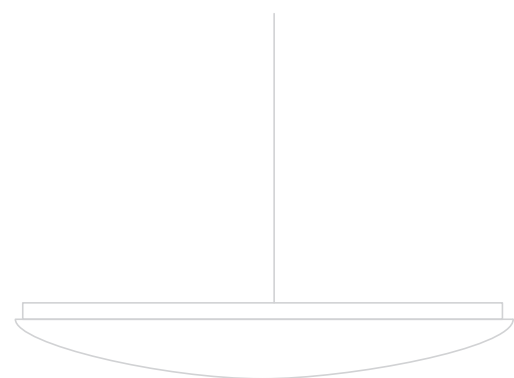









UPFO 80
2181-BB-86600H-DD-(III)-K

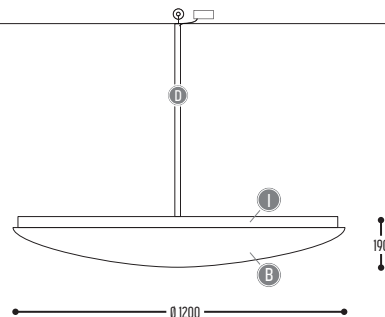

UPFO 120
2180-BB-88800H-DD-(III)-K



BB	COLORS	02		Black
		03		White
EFF	LED	UPFO 80	886	6x >90 CRI • 6300 Lm / 38,9 W
		UPFO 120	888	8x >90 CRI • 8400 Lm / 51,2 W
GG	REFLECTOR	00	N.A.	
H	COLOR TEMP.	2	2700 K	
		3	3000 K	
DD	SUSP. TUBE	01	1,5 m	
(III)	COLORS DETAIL optional	02		Black
		03		White
		111		Brass Finish
K	DRIVER	0	Non dimmable (intern)	
		2	Dimmable 1-10 V (intern)	
		3	Dali (intern)	

Composite - Alu



WALLSTER


design anthony boelaert for dark










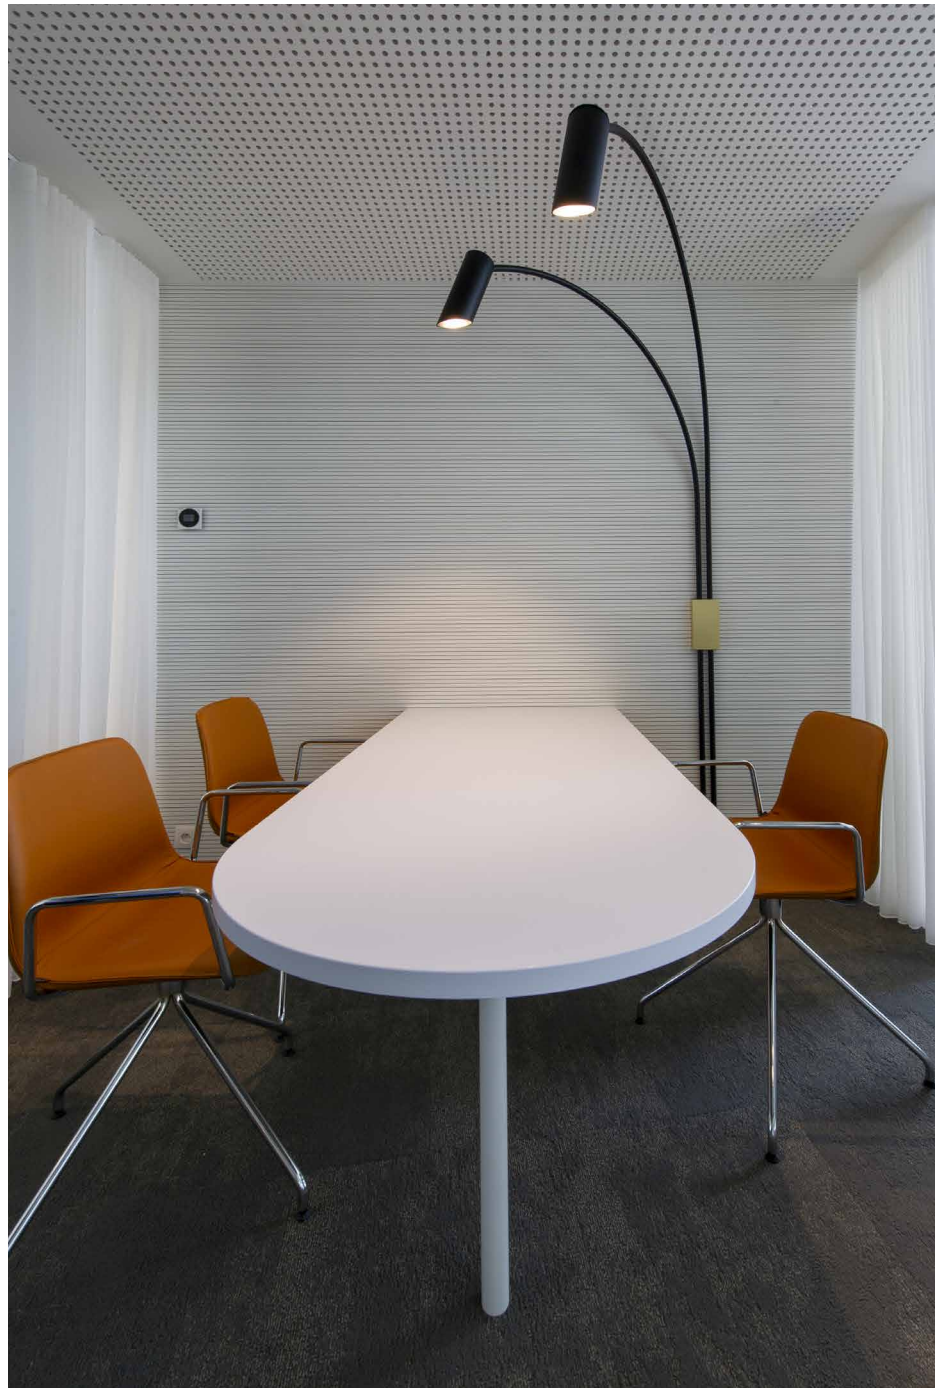




WALLSTER ONE

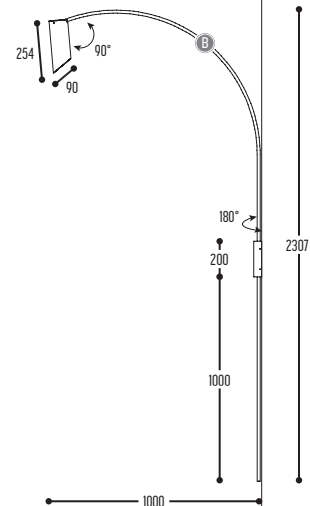


1116-BB-065-00
1116-BB-91500H-K



WALLSTER TWO

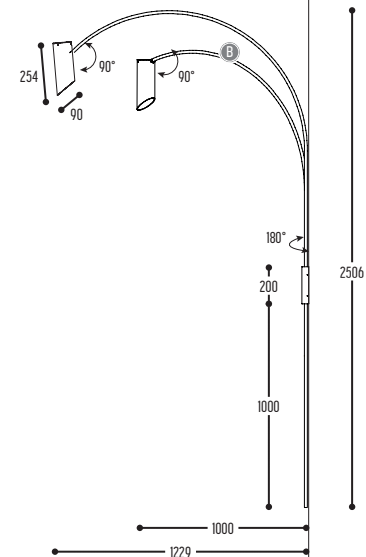1115-BB-065-00
1115-BB-91500H-K



BB(B)	COLORS	02		Black
		03		White
CCC	TYPE GU10	065		LED (MAX 7,5 W)
EFF	CRI • LUMENOUTPUT	915	LED	>90 CRI • 1500 Lm / 350 mA / 11,6 W
GG	REFLECTOR	00	N.A.	
H	COLOR TEMP.	2	2700 K	
		3	3000 K	
K	DRIVER	0	Non dimmable (intern)	
		2	Dimmable 1-10 V (intern)	
		3	Dali (intern)	

Metal-Alu




WALLSTER JR


design anthony boelaert for dark





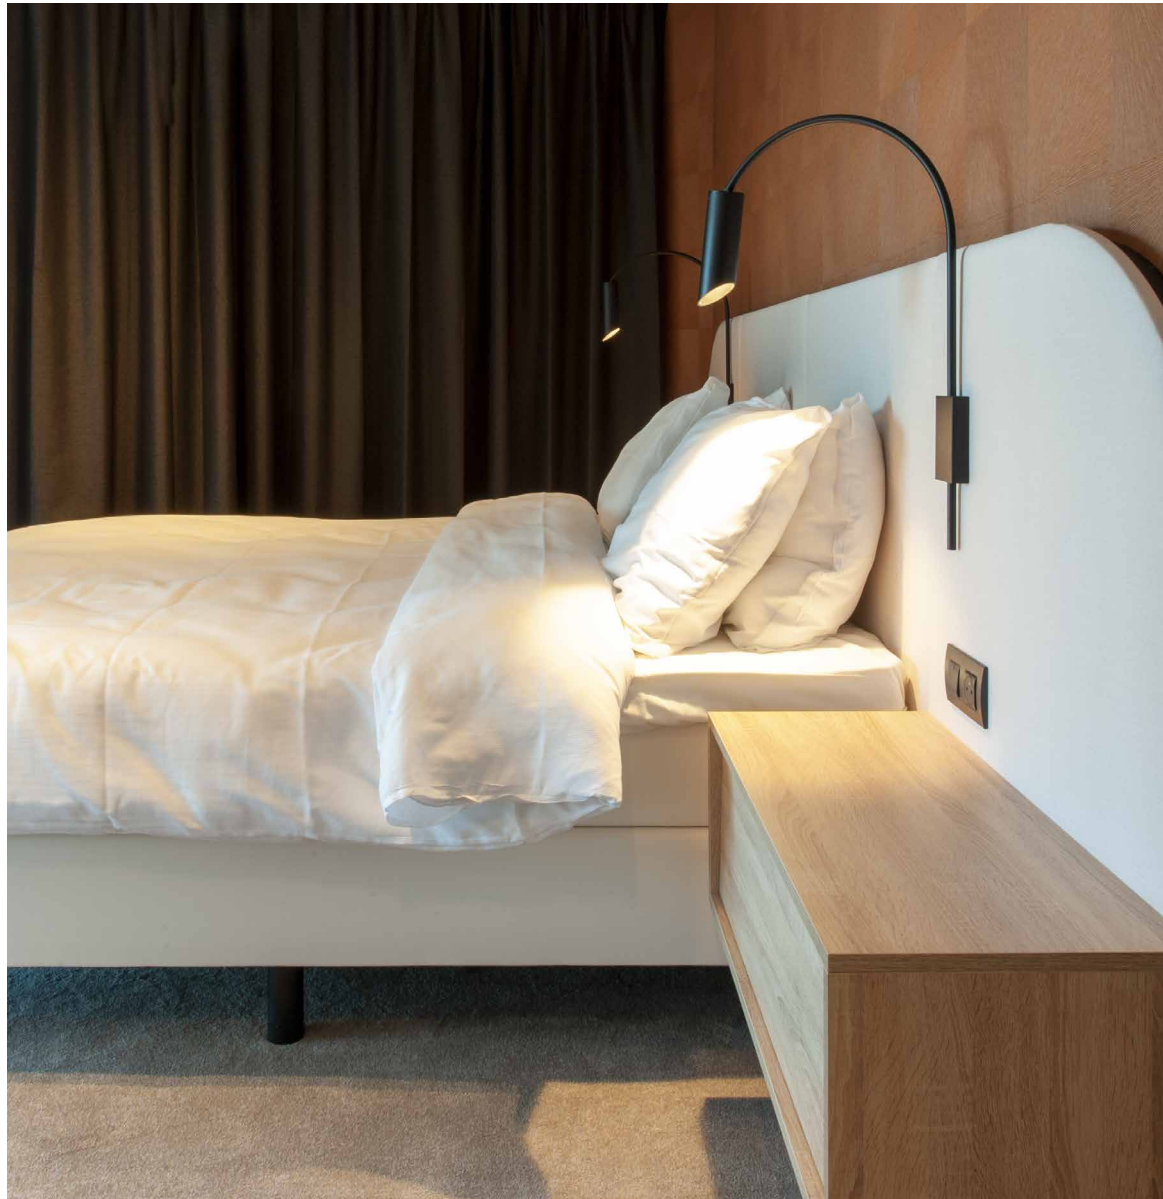



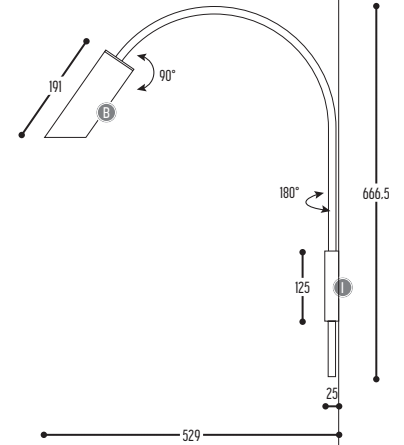






WALLSTER JR
1120-BB-90600H-II(I)-K

BB(B)	COLORS	02		Black
		03		White
EFF	CRI • LUMENOUTPUT	906	LED	>90 CRI • 600 Lm / 350 mA / 6,4 W
GG	REFLECTOR	00	N.A.	
H	COLOR TEMP.	2	2700 K	
		3	3000 K	
		4	4000 K	
II(I)	COLORS	02		Black
		03		White
		110		Brass
K	DRIVER	1	No driver	
		0	Non dimmable (intern)	
		2	Dimmable 1-10 V (extern)	
		3	Dali (extern)	

Metal-Alu



ZNOW

design anthony boelaert for dark





interior
innovation
award
2015
Selection







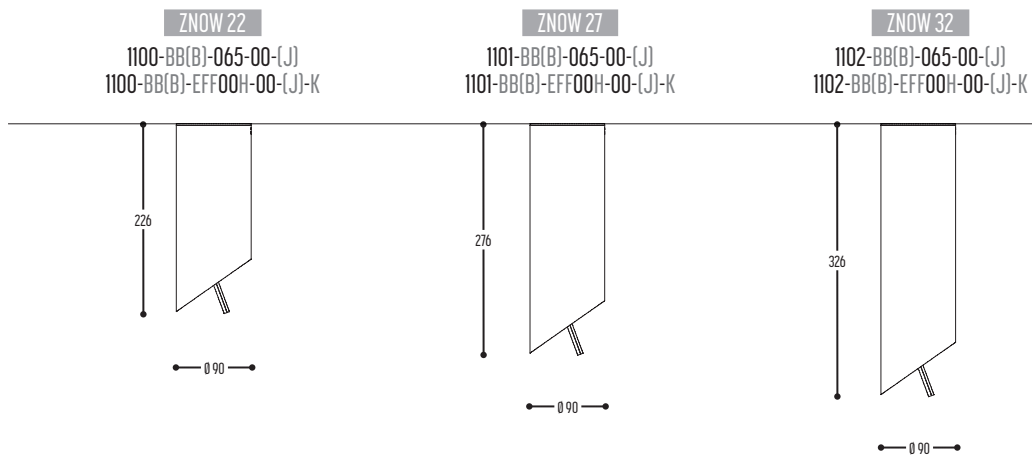


BB(B)	COLORS	02		Black	
		03		White	
		101		Soft Pink	
		103		Soft Blue	
		104		Soft Green	
		124		Kaki	
		140		Old Pink	
		141		Terracotta Red	
		142		Oxide Red	
		111		Brass Finish	
		112		Gold Finish	
		137		Bronze Finish	
				RAL color on request	
		CCC	TYPE GUIDO	065	
EFF	CRI • LUMEN OUTPUT	910	>90 CRI • 1100 Lm / 250 mA / 8,3 W		
		915	>90 CRI • 1500 Lm / 350 mA / 11,6 W		
H	COLOR TEMP.	2	2700 K		
		3	3000 K		
K	DRIVER	1	No driver		
		0	Non dimmable (intern)		
		2	Dimmable 1-10 V (extern)		
		3	Dali (extern)		
(J)	MIRROR optional	1	rotatable mirror		






ZNOW JR 16

1105-BB(B)-065-00-(J)
1105-BB(B)-90700H-00-(J)-K




ZNOW JR 19

1106-BB(B)-065-00-(J)
1106-BB(B)-90700H-00-(J)-K



ZNOW JR 24

1107-BB(B)-065-00-(J)
1107-BB(B)-90700H-00-(J)-K



BB(B)	COLORS	02		Black	
		03		White	
		101		Soft Pink	
		103		Soft Blue	
		104		Soft Green	
		124		Kaki	
		140		Old Pink	
		141		Terracotta Red	
		142		Oxide Red	
		111		Brass Finish	
		112		Gold Finish	
		137		Bronze Finish	
				RAL color on request	
		CCC	TYPE GUIDO	065	
EFF	CRI • LUMENOUTPUT	907	>90 CRI • 780 Lm / 250 mA / 8,7 W		
H	COLOR TEMP.	2	2700 K		
		3	3000 K		
K	DRIVER	1	No driver		
		0	Non dimmable (intern)		
		2	Dimmable 1-10 V (extern)		
		3	Dali (extern)		
(J)	MIRROR optional	1	rotatable mirror		

Alu




ZQUARE


design dark studio for dark






ZQUARE 1
922-BB(B)-906GGH-K

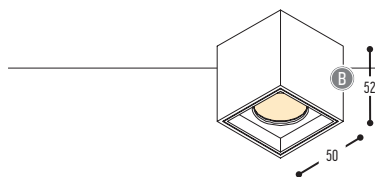

ZQUARE 2
924-BB(B)-906GGH-K




ZQUARE 3
926-BB(B)-906GGH-II(I)-K

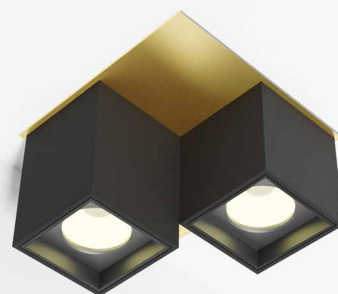


ZQUARE 4

927-BB(B)-906GGH-II(I)-K



ZQUARE MOVE

928-BB(B)-906GGH-II(I)-K

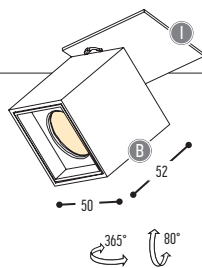


BB(B)	COLORS	02		Black
		03		White
		101		Soft Pink
		103		Soft Blue
		104		Soft Green
		124		Kaki
		140		Old Pink
		141		Terracotta Red
		142		Oxide Red
		111		Brass Finish
		112		Gold Finish
		137		Bronze Finish
EFF	CRI • LUMENOUTPUT	906	>90 CRI • 600 Lm / 350 mA / 6,4 W	
GG	REFLECTOR	22	22°	
		34	34°	
		54	54°	
H	COLOR TEMP.	2	2700 K	
		3	3000 K	
II(I)	COLOR PLATE	02		Black
		03		White
		110		Brass
K	DRIVER	1	No driver	
		0	Non dimmable (extern)	
		2	Dimmable 1-10 V (extern)	
		3	Dali (extern)	
		4	Phase cut (extern)	

Alu



TECHNICAL



02 Black



03 White



111 Brass Finish



112 Gold Finish



103 Soft Blue



101 Soft Pink



137 Bronze Finish



104 Soft Green



124 Kaki




140 Old Pink



141 Terracotta Red



68 Copper finish



103 Oxide Red

LAMPS

E27 FILAMENT-LAMP



G45 - 45 x 73mm

180-7500-044527

4W, 2700K, 400lm, triac dimmable, clear



A60 - 60 x 105mm

180-7500-044527

4W, 2700K, 400lm, triac dimmable, clear

180-7500-066027

6W, 2700K, 600lm, triac dimmable, clear

180-7500-086027

8W, 2700K, 800lm, triac dimmable, clear



T45 - 45 x 110mm

180-7500-02T4527

2W, 2200-2700K, 210lm, triac dimmable, clear



G80 - 80 x 125mm

180-7500-068027

6W, 2700K, 600lm, triac dimmable, clear



G95 - 95 x 135mm

180-7500-069527

6W, 2700K, 600lm, triac dimmable, clear

180-7500-069527-0

6W, 2700K, 600lm, triac dimmable, opal




G125 - 125 x 175mm

180-7500-0612527


6W, 2700K, 540lm, triac dimmable, clear

3D Warehouse - Sketchup library

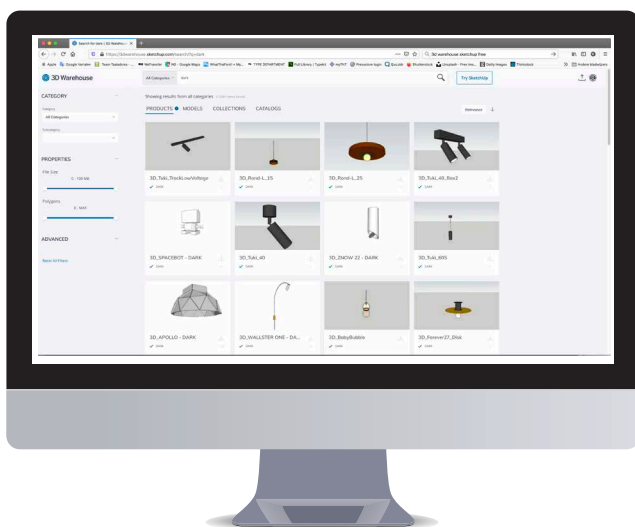


<https://3dwarehouse.sketchup.com>


CEILING PROFILE - 3P single

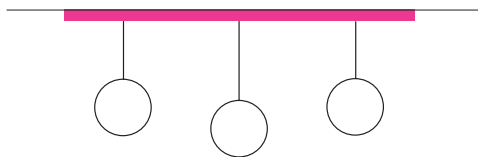


Black **1895-02**
White **1895-03**

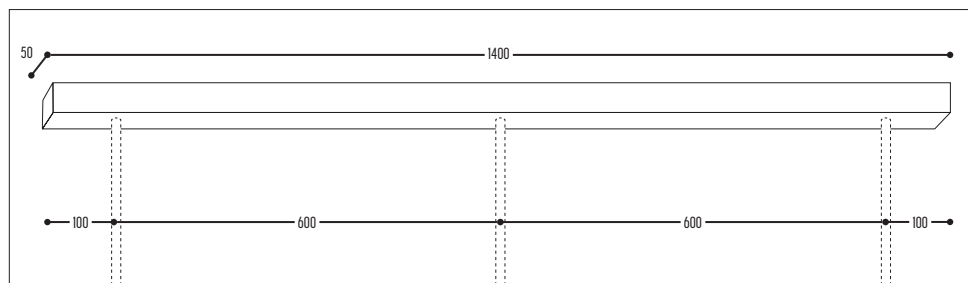

CEILING PROFILE - 3P double

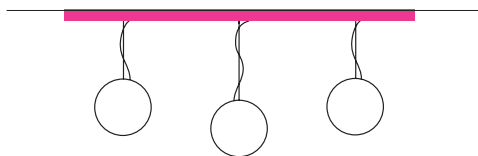

Black **1896-02**
White **1896-03**

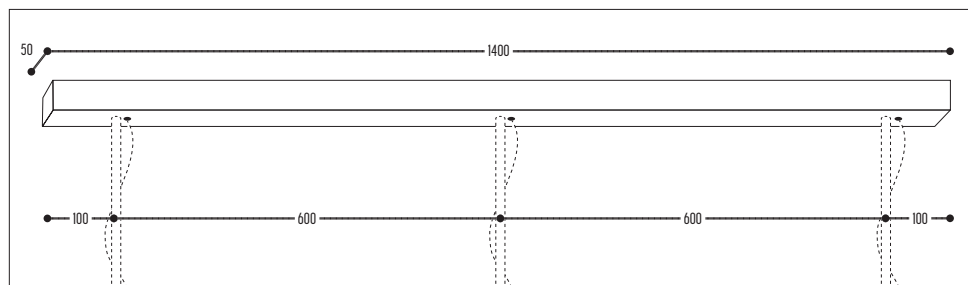

CEILING BASE



Black 100-8002-225640
White 100-8003-225640

CEILING BASE LARGE



Black 100-8002-225650
White 100-8003-225650

CEILING S2/ SET 50



Black 100-8002-225750
White 100-8003-225750

CEILING S2/ SET 90








Black 100-8002-225500
White 100-8003-225500


CEILING S2/ SET 60



Black 100-8002-225760
White 100-8003-225760

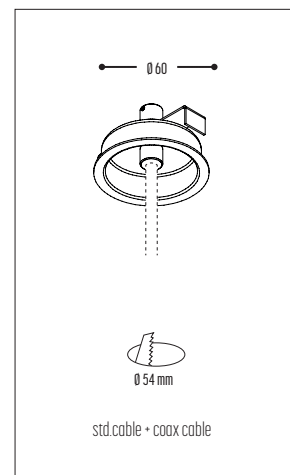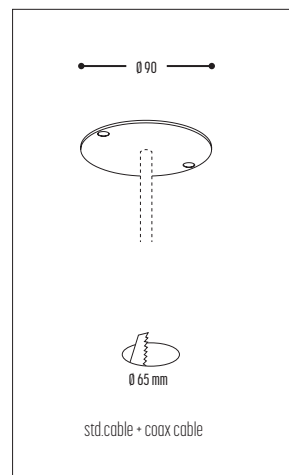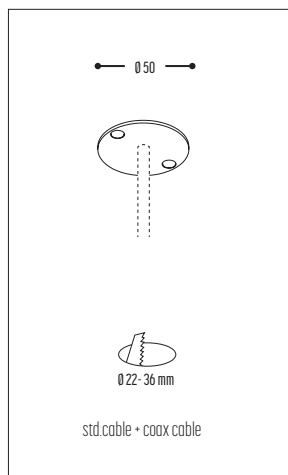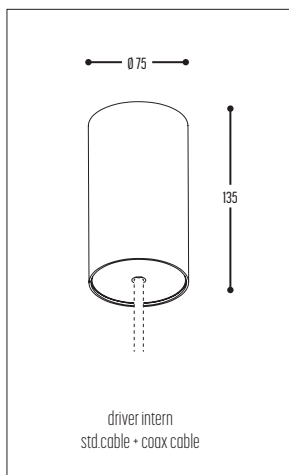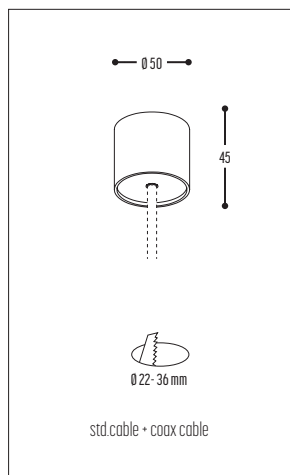


CEILING BASE - 3 POINT KIT




Ceiling base Black + 3x Cliffhanger Black **1897-02-02**
 Ceiling base Black + 3x Cliffhanger Brass **1897-02-110**
 Ceiling base White + 3x Cliffhanger White **1897-03-03**
 Ceiling base White + 3x Cliffhanger Brass **1897-03-110**

CEILING BASE - 5 POINT KIT




Ceiling base Black + 3x Cliffhanger Black **1898-02-02**
 Ceiling base Black + 3x Cliffhanger Brass **1898-02-110**
 Ceiling base White + 3x Cliffhanger White **1898-03-03**
 Ceiling base White + 3x Cliffhanger Brass **1898-03-110**

CEILING BASE CLUB 3







Black **1893-02**
 White **1893-03**

CEILING BASE CLUB 5



Black **1894-02**
 White **1894-03**

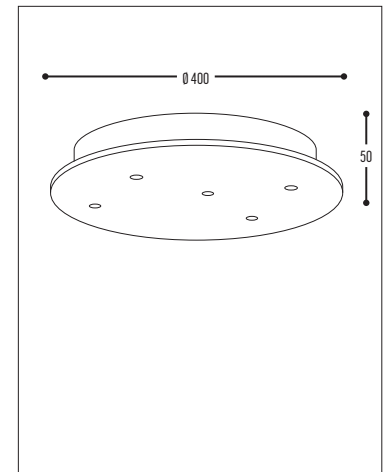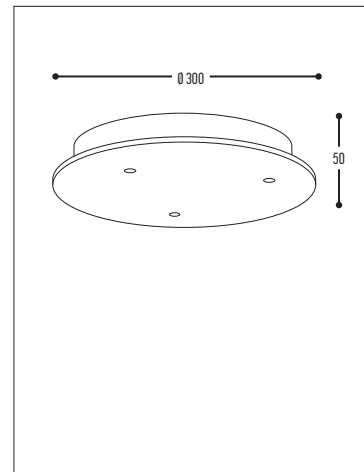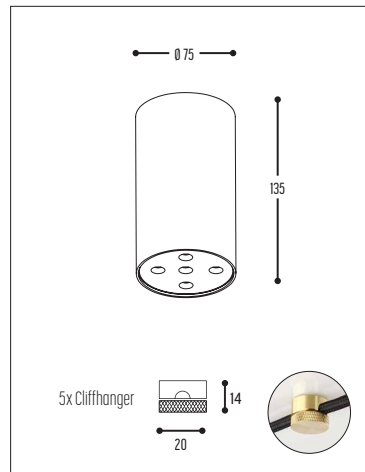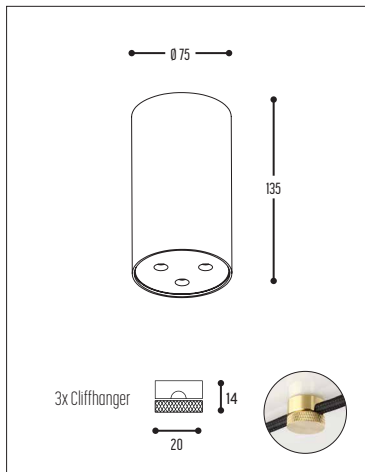


INSTALLATION OF LED

for dummies

CONSTANT CURRENT : SERIAL CONNECTION


f.e. ATSJI spots have a constant current LED inside (CC). If connected on 1 driver they should always be put in serial connection. Otherwise the ATSJI spot will not work or give less lumen output.

Please ask our salesteam for max. amount of fixtures on 1 driver.




CONSTANT VOLTAGE : PARALLEL CONNECTION


f.e. NINZA led profiles have a constant voltage LED inside (CV). If connected on 1 driver they should always be put in parallel connection. Please ask our salesteam for the driver selection.



CONSTANT CURRENT : WRONG PARALLEL CONNECTION

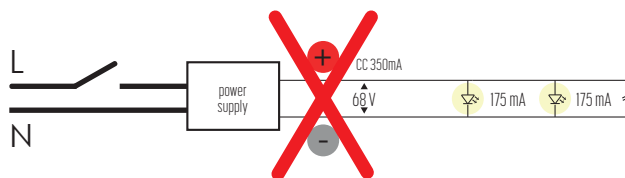



CONSTANT VOLTAGE : WRONG SERIAL CONNECTION

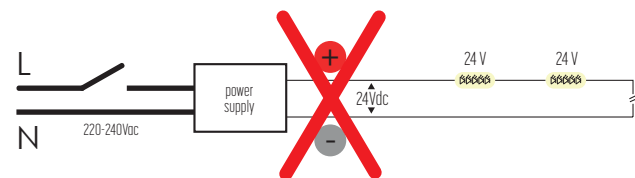


SWITCHED ON POWER SUPPLY CONNECTION WRONG

The LED fixture (f.e. ATSJ1) has a maximum input voltage. Connecting the fixture to a switched on powersupply can exceed the secondary side max. voltage and thus damage the LED fixtures.

f.e. Atsj specifications = 14W , driven @ 350mA cc, Vf 34V

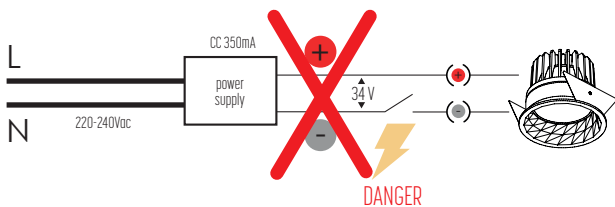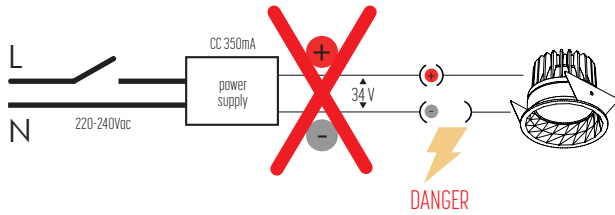


DIMMING TYPE 2 = 1-10V DIM.

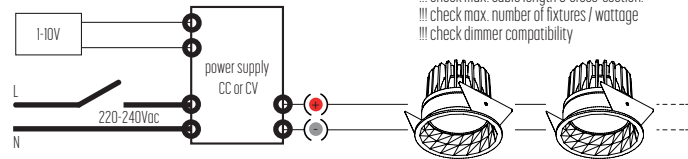


!!! check max. cable length & cross-section.
!!! check max. number of fixtures / wattage
!!! check dimmer compatibility

DIMMING TYPE 3 = DALI DIM.

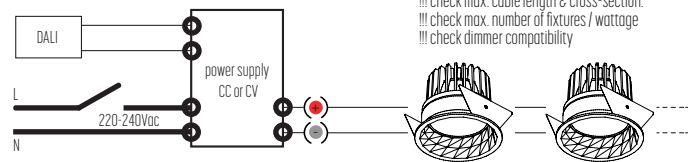

!!! check max. cable length & cross-section.
!!! check max. number of fixtures / wattage
!!! check dimmer compatibility

DIMMING TYPE 4 = PHASE CUT DIM.

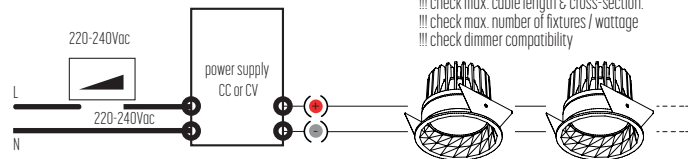


!!! check max. cable length & cross-section.
!!! check max. number of fixtures / wattage
!!! check dimmer compatibility

IP VALUES - SAFETY ZONES

Dark lights suitable for each zone

<p>ZONE 0 MINIMUM IP X7</p>	<p>NINZA IP 67</p>
<p>ZONE I MINIMUM IP X5</p>	<p>NINZA IP 65 TAQI IP 65</p>
<p>ZONE II MINIMUM IP X4</p>	<p>APETITO IP 44 ATSJI IP 44 ATSJOEM IP 44 TWERKIT IP 44</p>

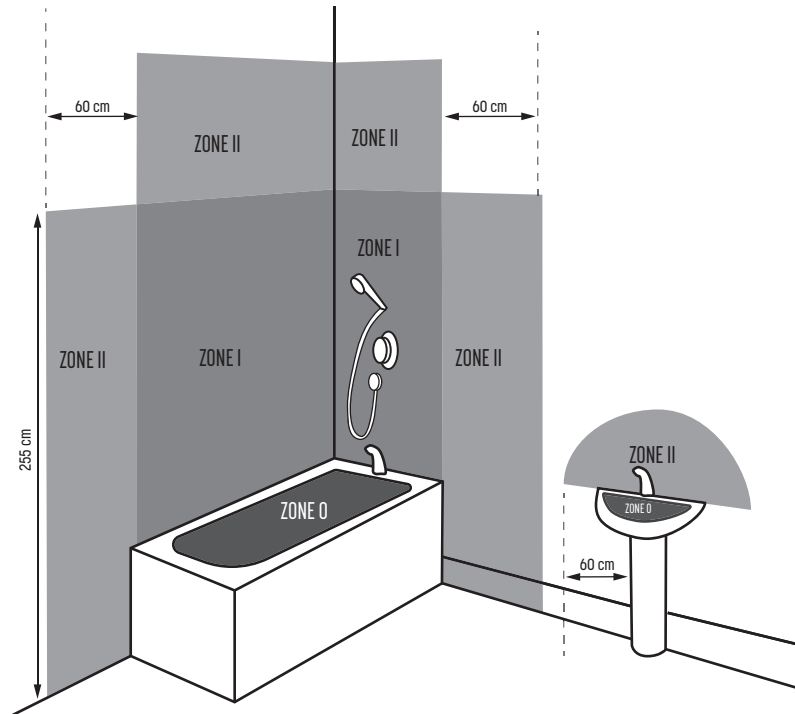



























<p>first digit : solid particle protection</p> <p>↑</p> <p>IP XX</p>	<p>→ second digit: liquid ingress protection</p>
<p>IP X7</p>	<p>→ immersion into water up to 1 m depth</p>
<p>IP X5</p>	<p>→ waterjet</p>
<p>IP X4</p>	<p>→ splashing water</p>

ZONE 0 refers to the content of the bath or shower. Here, electrical appliances are out of the question. If you still want a place in your bath or shower, it must have an IP rating of minimum IPX7 (protection against submersion) and operate on a VLSV (Very Low Safety Voltage). VLSV refers to either 12V AC or 25V DC. It is best to have the lighting in zone 0 installed by a qualified electrician

ZONE I refers to the zone up to 2.25 meters above the bottom of the bath or shower. Lighting in this zone should also work on a VLSV. The IP value in zone 1 must not be lower than IPX5 (protection against water jets).

ZONE II then goes up to 60 cm around the bath or shower. A VLSV is also required within this zone. 230V voltage is possible, in case it is a spot that is at least 1.60m from the ground. This spot must be connected to a differential of 30mA at the same time. In zone 2, a minimum IP value of IPX4 is required.

	CE regulations		Constant voltage driver
	Class I (ground)		Constant current led inside
	Class II		Horizontal adjustable angle
	Class III		Vertical adjustable angle
	220-240 V ac power supply		USB charging adapter
	no ultraviolet or infrared light		Remote control
	Unified glaring ratio optimized		Battery life
	Unified glaring ratio <19 using prismatic diffuser		Indoor
			Outdoor covered
	Glow wire testing		Outdoor
			Surface / Suspended / Recessed installation
			Wall installation
	Protection degree		Wall or ceiling installation
			Floor installation
			Using sensor ready certified components
	Downlight		Ø 42 mm Cut out dimensions
	Up & Downlight		Used materials
	Down side light		
	Up side light		

DARK[®]

DARK at night nv
Vliegplein 43
9991 Maldegem – Belgium
+32 50 71 81 40
info@dark.be
www.dark.be



www.facebook.com/wealllovetheDark



www.pinterest.com/pindark



www.instagram.com/dark.be

© DARK 2021 - Dark has the right to change any technical data, dimensions, colors and characteristics without prior notice. All rights reserved.
Please check always the latest technical data sheets on www.dark.be.

Dark is very proud to present this collection and especially the fact that we have more than 80 international design awards.

Any reproduction of the Dark products is strictly forbidden and can seriously damage your health and endanger your bank account.

www.dark.be